



## A Ramping Controller With Guided Programming

The Series F4 industrial ramping controllers provide powerful, precise control of the most demanding ramp and soak processing applications. They are also easy to set up and operate. Their features and performance make them ideally suited for environmental chamber or furnace and oven applications. Single and dual channel versions are available.

These competitively-priced controllers feature a four-line, high definition LCD display that makes profile programming and controller configuration fast and easy. A 16-bit microprocessor supports the accuracy and performance you expect from a Watlow controller.

As many as 256 steps can be programmed into as many as 40 namable profiles. Profiles can be programmed to wait for events or for three different process variables. A guaranteed soak feature insures that the process follows the profile within a specified band.

The four digital event inputs can be programmed to remotely start, pause or terminate any of your preprogrammed profiles. The eight event outputs are step programmable; three of them can be assigned to programmable compressor and boost heat/boost cool control. The real-time clock permits you to start or repeat a profile at any time.

Serial communication and dual alarm relays are included in the base unit. The Series F4 ramping controllers are packaged with an IP65 (NEMA 4X) front face to withstand harsh environments, and an 108 mm-deep case with removable connectors for wiring convenience.

The Series F4 controllers are manufactured by Watlow Controls, an ISO 9001-registered company, and backed by a three-year warranty.



### Features and Benefits

#### Memory stores 40 profiles, in as many as 256 steps

- Supports a wide range of processing applications

#### Guided profile programming and “information” key

- Simplifies setup

#### High definition four-line LCD interface display

- Simplifies setup and operation

#### Menu customization

- Enhances process monitoring

#### High performance 16-bit microprocessor

- Precise process control

#### Universal inputs

- Application versatility

#### Expandable modular construction

- Field upgradable

#### Enhanced environmental chamber control

- Supports humidity, compressor, boost heat/boost cool control

#### Cascade control

- Precise two variable control

#### Real-time clock with battery backup

- Operational flexibility

# PROHEAT

*Excellence in distribution*

<http://www.proheatinc.com>

117 East Adams Street

P.O. Box 48

LaGrange, KY 40031

Phone (502) 222-1402 Fax (502) 222-0714

## Set Point Ramp and Soak Programming


The enhanced programming features found in the Series F4 ramping controllers are the result of listening to our customers' demand for greater capabilities with reduced programming complexity.

A profile guide leads the programmer by offering choices for step configuration. (For better operator recognition, profiles and digital inputs and outputs used for events can be given names of up to 10 characters in length.)

Five step types, including ramp, soak, jump, autostart and end offer the programmer complete flexibility. Ramp steps can be based on time or rate. Ramp and soak steps can be programmed to wait for as many as four event inputs and three process variables. The eight event outputs are step

selectable. Since your thermal system's characteristics may change over its operating range, 10 sets of PID heat/cool parameters are step selectable. The autostart step can start a profile based on a set date, a day of the week, or daily. The jump step can jump within a profile or to another profile. The end step terminates a program with the control outputs programmed to your process needs.

## Temperature and Humidity Chamber Application

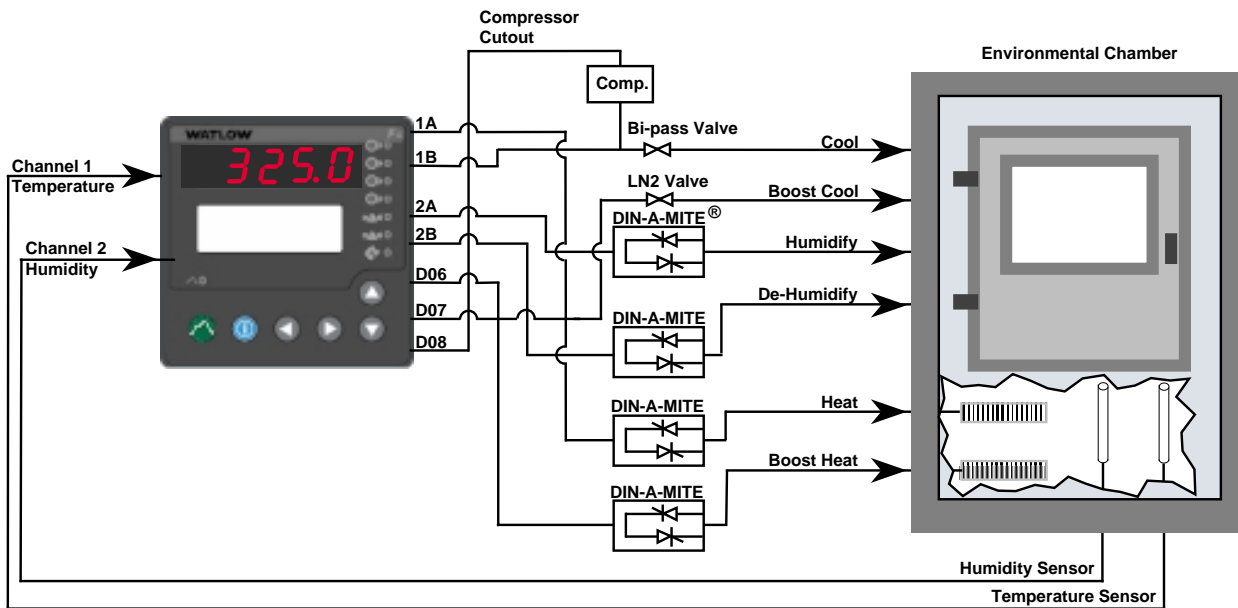

## Serial Communication


EIA-232 and EIA-485 serial communication interfaces are included in the base unit of both the Series F4S (single channel) and the Series F4D (dual channel) controllers. The baud rate is selectable as either 9600 or 19200 Kbaud. The protocol is Modbus™.

## Alarms

Two Form "C" electromechanical alarm relays are included in the base units. These alarms can be programmed as either process or deviation alarms. The alarms can be tied to up to three process variables.

## Optional Retransmit

Optional retransmit capability is available to retransmit one or two variables. These variables include up to three process variables, control set points or percent load power.

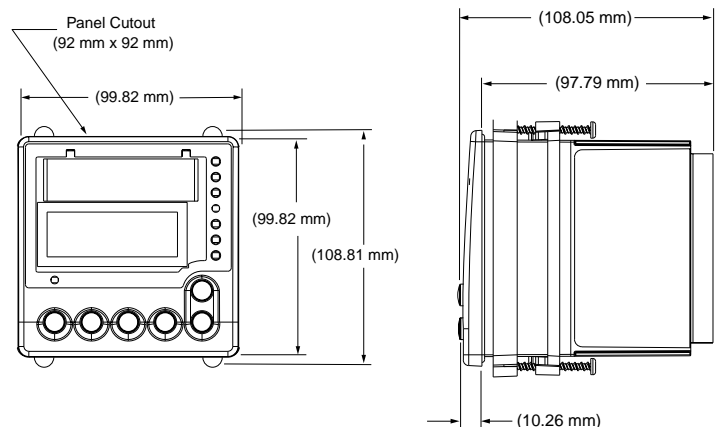

## Specifications

### Dimensions

- Width x height x depth  
panel cutout: 92 mm x 92 mm x 108 mm  
front face: 99.8 mm x 99.8 mm x 97.8 mm

## Specifications (1760)

### Universal Analog Inputs 1 (2 and 3 optional)

- Update rates, IN1 = 20Hz, IN2 and IN3 = 10Hz

### Thermocouple

- Type J, K, T, N, C (W5), E, PTII, D (W3), B, R, S

### RTD

- 2- or 3-wire platinum, 100Ω
- JIS or DIN curves, 1.0 or 0.1 indication

### Process

- Input resolution ≈ 50,000 bits at full scale
- Range selectable: 0-10V<sub>DC</sub> (dc), 0-5V<sub>DC</sub> (dc), 1-5V<sub>DC</sub> (dc), 0-50mV, 0-20mA, 4-20mA
- Voltage input impedance 20KΩ
- Current input impedance 100Ω

### Digital Inputs (4)

- Update rate = 10Hz
- Contact or dc voltage
- 10KΩ input impedance

### Control Outputs (1A, 1B, 2A, 2B)

- Update rate = 20Hz

### Open Collector/Switched DC

- Internal load switching (nominal): Switched dc, 22 to 28V<sub>DC</sub> (dc), limited @ 30mA
- External load switching (maximum): Open collector 42V<sub>DC</sub> (dc) @ 0.5A

### Solid-state Relay

- Zero switched, optically coupled, 0.5A @ 24V<sub>AC</sub> (ac) minimum, 253V<sub>AC</sub> (ac) maximum

### Process Outputs (Optional Retransmit)

- Update rate = 1Hz
- User-selectable 0-10V<sub>DC</sub> (dc), 0-5V<sub>DC</sub> (dc), 1-5V<sub>DC</sub> (dc) @ 1KΩ min., 0-20mA, 4-20mA @ 800Ω max.
- Resolution:
  - dc ranges = 2.5mV nominal
  - mA ranges = 5μA nominal
- Calibration accuracy:
  - dc ranges = ±15mV
  - mA ranges = ±30μA
- Temperature stability 100ppm/°C

### Alarm Outputs

- Output update rate 1Hz
- Electromechanical relay, Form C, 2A @ 30V<sub>DC</sub> (dc) or 240V<sub>AC</sub> (ac) maximum

### Digital Outputs (8)

- Update rate = 10Hz
- Open collector output
- Off: 42V<sub>DC</sub> (dc) max @ 10μA
- On: 0.2V<sub>DC</sub> (dc) max @ 50mA sink
- Internal supply: 5V<sub>DC</sub> (dc), @ 80mA

### Communications

EIA-232 and EIA-485 serial communications with Modbus™ RTU protocol

### Safety and Agency Approvals

- CE EMC to EN50082-2
- CE EMC to EN55011
- CE to EN 61010
- UL®/C-UL 916-listed, File # E185611
- IP65 (NEMA 4X)

### Terminals

- Touch-safe, removable terminal blocks, accepts 12- to 22-gauge wire

### Power

- 100-240V<sub>AC</sub> (ac), -15%, +10%; 50/60Hz, ±5%
- 24-28V<sub>AC</sub> (ac/dc), -15%, +10% (order option)
- 39VA maximum power consumption
- Data retention upon power failure via nonvolatile memory (seven years for battery-backed RAM). Sensor input isolation from input to input to output to communication circuitry is 500V<sub>AC</sub> (ac).

### Operating Environment

- 0 to 55°C
- 0 to 90% RH, non-condensing
- Storage temperature: -40 to 70°C

### Accuracy

- Calibration accuracy and sensor conformity: ±0.1% of span ±1 LSD @ 25°C ±3°C ambient, and rated line voltage ±10% with the following exceptions:
  - Type T, 0.12% of span for -200°C to -50°C
  - Types R and S, 0.15% of span for 0°C to 100°C
  - Type B, 0.24% of span for 870°C to 1700°C
- Accuracy span: Less than or equal to operating ranges, 540°C minimum
- Temperature stability: ±0.1°C/°C rise in ambient for thermocouples
- ±0.05°C/°C rise in ambient for RTD sensors

### Displays

- Process: 5, seven-segment LED red
- Control interface display: high-definition LCD green

### Sensor Operating Ranges:

Type J:	1.0	32	to	1500°F	or	0	to	815°C
Type K:	1.0	-328	to	2500°F	or	-200	to	1370°C
Type T:	1.0	-328	to	750°F	or	-200	to	400°C
Type N:	1.0	32	to	2372°F	or	0	to	1300°C
Type E:	1.0	-328	to	1470°F	or	-200	to	800°C
Type C:	1.0	32	to	4200°F	or	0	to	2315°C
Type D:	1.0	32	to	4200°F	or	0	to	2315°C
Type PTII:	1.0	32	to	2543°F	or	0	to	1395°C
Type R:	1.0	32	to	3200°F	or	0	to	1760°C
Type S:	1.0	32	to	3200°F	or	0	to	1760°C
Type B:	1.0	32	to	3300°F	or	0	to	1816°C
RTD (DIN):	1.0	-328	to	1472°F	or	-200	to	800°C
RTD (JIS):	1.0	-328	to	1166°F	or	-200	to	800°C
Process:		-1999	to	9999	units			

### Sensor Accuracy Ranges:

#### Input ranges

Type J:	32	to	1382°F	or	0	to	750°C
Type K:	-328	to	2282°F	or	-200	to	1250°C
Type T:	-328	to	662°F	or	-200	to	350°C
Type N:	32	to	2282°F	or	0	to	1250°C
Type E:	-328	to	1470°F	or	-200	to	800°C
Type C(W5):	32	to	4200°F	or	0	to	2315°C
Type D(W3):	32	to	4200°F	or	0	to	2315°C
Type PTII:	32	to	2540°F	or	0	to	1393°C
Type R:	32	to	2642°F	or	0	to	1450°C
Type S:	32	to	2642°F	or	0	to	1450°C
Type B:	1598	to	3092°F	or	870	to	1700°C
RTD (DIN):	-328	to	1472°F	or	-200	to	800°C
RTD (JIS):	-328	to	1166°F	or	-200	to	630°C
Process:		-1999	to	9999	units		

**Note: These specifications are subject to change without prior notice.**

UL® is a registered trademark of Underwriter's Laboratories, Inc.

## Ordering Information (1761)

### ¼ DIN Single-Channel Ramping Controller

#### Series F4

¼ DIN, Single-Channel Ramping Controller

#### Single-Channel Ramping Controller

1 universal analog input, 4 digital inputs, 8 digital outputs, 2 alarms, EIA-232/485 comms

#### Power Supply

H = 100-240V $\approx$  (ac/dc)  
L = 24-28V $\approx$  (ac/dc)

#### Output 1A

C = Open collector/switched dc  
F = Process, 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA  
K = Solid-state Form A 0.5-amp relay

#### Output 1B

A = None  
C = Open collector/switched dc  
F = Process, 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA  
K = Solid-state Form A 0.5-amp relay

#### Auxiliary Input Module

0 = None  
6 = Dual universal inputs

#### Auxiliary Retransmit Module

0 = None  
1 = Single retransmit output 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA  
2 = Dual retransmit outputs 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA

#### Language Option

##### (Consult factory for availability)

1 = English (default is U.S. PID units, Fahrenheit)  
2 = German (preset to S.I. PID units, Celsius)  
3 = French (preset to S.I. PID units, Celsius)  
4 = Spanish (preset to S.I. PID units, Celsius)  
5 = English (preset to S.I. PID units, Celsius)

#### Custom Options

R = Red display  
G = Green display  
XX= Custom options: software, setting parameters, overlay

**Consult your sales representative or distributor regarding model number information for controller defaults to SI units.**

F4 S - A -

## Ordering Information (1833)

### ¼ DIN Dual Channel Ramping Controller

#### Series F4

¼ DIN, Dual Channel Ramping Controller

#### Dual-Channel Ramping Controller

3 universal analog inputs, 4 digital inputs, 8 digital outputs, 2 alarms, EIA-232/485 comms

#### Power Supply

H = 100-240V $\approx$  (ac/dc)  
L = 24-28V $\approx$  (ac/dc)

#### Output 1A

C = Open collector/switched dc  
F = Process, 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA  
K = Solid-state Form A 0.5-amp relay

#### Output 1B

A = None  
C = Open collector/switched dc  
F = Process, 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA  
K = Solid-state Form A 0.5-amp relay

#### Output 2A

C = Open collector/switched dc  
F = Process, 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA  
K = Solid-state Form A 0.5-amp relay

#### Output 2B

A = None  
C = Open collector/switched dc  
F = Process, 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA  
K = Solid-state Form A 0.5-amp relay

#### Auxiliary Retransmit Module

0 = None  
1 = Single retransmit output 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA  
2 = Dual retransmit outputs 0-5, 1-5, 0-10V $\approx$  (dc), 0-20mA, 4-20mA

#### Language Option

##### (Consult factory for availability)

1 = English (default is U.S. PID units, Fahrenheit)  
2 = German (preset to S.I. PID units, Celsius)  
3 = French (preset to S.I. PID units, Celsius)  
4 = Spanish (preset to S.I. PID units, Celsius)  
5 = English (preset to S.I. PID units, Celsius)

#### Custom Options

R = Red display  
G = Green display  
XX= Custom options: software, setting parameters, overlay

**Consult your sales representative or distributor regarding model number information for controller defaults to SI units.**

F4 D - - - - -