


Hi-Density Cartridge Heaters .....2-2  
 Terminator Program.....2-18  
 Metric Sizes .....2-20  
 Low Density Cartridge Heaters .....2-26  
 Cartridge Heater Terminations .....2-31


Immersion Heaters .....2-48  
 Bolt Heaters .....2-50  
 Runnerless Molding  
 Cartridge Heaters .....2-52  
 OEM Replacement Heaters:  
 For Runnerless Molding Systems ..2-54  
 For Internally Heated  
 Machine Nozzles.....2-60  
 For Underwater  
 Pellatizer Die .....2-61  
 Square Cartridge Heaters .....2-62



# CARTRIDGE HEATERS

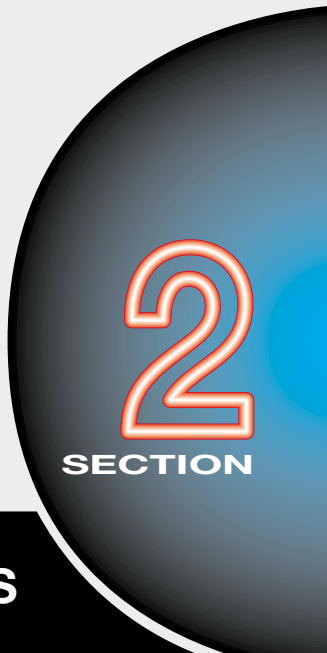

# HI DENSITY CARTRIDGE HEATER FEATURES

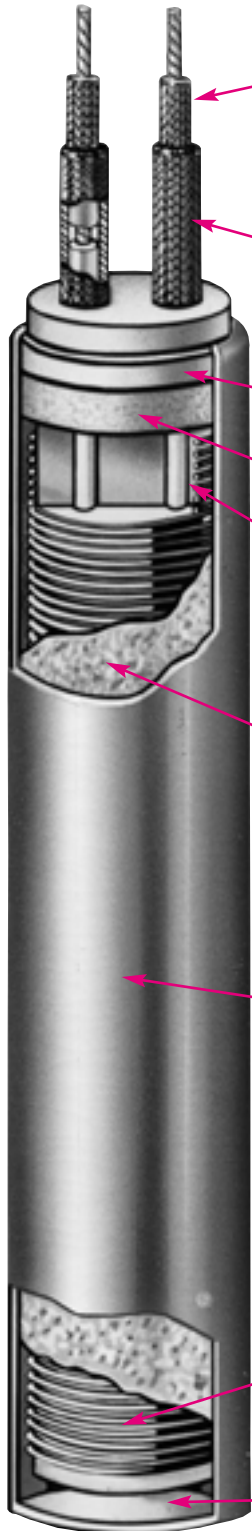

**A** The standard termination for Hi-Density Cartridge Heaters is Type "N", consisting of 10" (254 mm) externally connected leads to 1¼" (32 mm) solid nickel connectors. The leads are stranded nickel wire with high temperature fiberglass/Teflon® tape insulation, UL approved for 300 Volt or 600 Volt service, rated at a continuous operating temperature of 482°F (250°C). To meet the requirements of your application we offer over 40 standard termination styles to select from that will solve many of the most common application problems. See pages 2-31 through 2-43.

**B** Double wall thickness high temperature fiberglass sleeve provides maximum electrical insulation to the connector used to splice the nickel conductors to the flexible leads.

**C** Ceramic end cap prevents nickel conductors from shorting out against sheath when sharp bending of the leads is required.

**D** Ceramic end cap and swaged-in lava plug protect the internal cartridge from outer contamination. Other types of seals can also be provided.

**E** For maximum current carrying capacity large diameter solid nickel conductors are used to insure a good electrical connection between the resistance wire and the nickel lead wires.

**F** Specially selected grain size high purity Magnesium Oxide (MgO) is used to fill all remaining space inside the sheath. Heater is then swaged, which compacts the magnesium oxide grains into a solid mass, thereby increasing thermal conductivity and dielectric strength.

**G** Alloy 321 Stainless Steel is used to provide high temperature strength, good thermal conductivity and resistance to corrosion and scaling. Alloy 321 is a Nickel-Chromium Stainless Steel modified with the addition of Titanium. For higher operating temperatures or corrosive immersion heating applications Incoloy® 800 and Alloy 316 Stainless Steel are available.

**H** Grade "A" Nickel-Chrome resistance wire is precisely wound on a high purity magnesium oxide core, placing the resistance wire as close to the inside of the sheath as possible while still maintaining dielectric strength. This provides excellent heat transfer, and results in the highest possible watt densities and longer heater life.

**I** Heli-arc welded end disc made from same material as the sheath provides a positive seal against moisture and other contaminants. Pennybottom™ heaters have a flat copper end disc.




## TEMPCO Offers the most comprehensive selection in Hi-Density Cartridge Heaters

**“HDM”** Hi-Density Cartridge Heaters in metric sizes are suitable for a wide range of applications and are available with the same options as “HDC” English sizes. See pages 2-20 through 2-25.

**“HDP”** Pennybottom™ Hi-Density Cartridge Heaters exclusively designed for runnerless plastic injection molding systems, with built-in thermocouple and flat copper end disc for maximum heat transfer. For complete details and stock sizes, see runnerless injection molding section, pages 2-52 through 2-57.



**“HDB”** Hi-Density cartridge BOLT heaters specially designed for assisting in the assembly of large equipment by rapid expansion of large studs and holding bolts. For complete details and standard sizes, see pages 2-50 and 2-51.

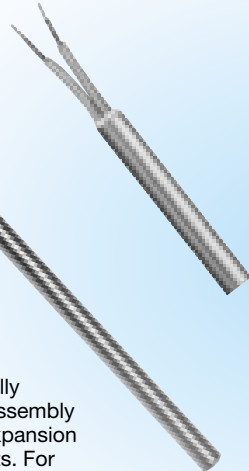

**The industry standard since 1972.**  
**“HDC”** Tempco Hi-Density cartridge heaters in English sizes. See pages 2-8 through 2-16 for stock sizes.



**“HDL”** Hi-Density Cartridge Immersion Heaters with single or double end NPT fittings, for heating liquids, air and other gases. For complete details and stock sizes, see pages 2-48 and 2-49.

### THE HI-DENSITY ADVANTAGE

1. Higher watt densities permit smaller heaters to be used without sacrificing life expectancy. This results in up-front as well as long-term cost savings.
2. Swaged construction provides maximum support for the resistance wire, eliminating the effects of vibration and shock.
3. Excellent heat transfer characteristics permit improved life expectancy over other style heaters.
4. Termination styles and special features allow customization to any application.
5. Applications up to 1500°F (820°C).

### TYPICAL APPLICATIONS

- Plastic Extruders
- Hot Runner Molds
- Hot Stamping
- Medical Equipment
- Packaging Equipment
- Molds and Dies
- Plastic Molding
- Shoe Machinery
- Food Processing
- Heating Gases and Liquids
- Glue Guns

### STANDARD OR CUSTOM DESIGNED

Hi-Density cartridge heaters are manufactured in a complete range of standard physical dimensions, electrical ratings and lead terminations. Thousands of “HDC” cartridge heaters are available from stock ready for lead customization in our Terminator™ Program. See pages 2-8 through 2-16 for stock sizes and pages 2-31 through 2-47 for lead terminations and options.

Understanding that a Cartridge Heater can be very application specific, for sizes, ratings and lead terminations not shown, TEMPCO’s engineers will design and manufacture a Hi-Density Cartridge Heater to meet your requirements.



**Hi Density Cartridge Heaters** are UL recognized and CSA certified in many design variations. Tempco’s UL file number is E65652 and CSA file number is LR43099-4. If you require a UL Recognized or CSA Certified heater, please specify.





# Standard Specifications

**Standard Specifications and Tolerances** of Hi-Density Cartridge Heaters.  
If tighter tolerances are required consult Tempco.

## DIMENSIONAL SPECIFICATIONS

Nominal Diameter	$\frac{1}{4}$	$\frac{5}{16}$	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{5}{8}$	$\frac{3}{4}$	<b>1</b>
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)
Actual Diameter	.246 (6.25)	.308 (7.82)	.371 (9.42)	.496 (12.60)	.621 (15.77)	.746 (18.95)	.996 (25.30)
Diameter Tolerance	$\pm .002$ (.051)	$\pm .002$ (.051)	$\pm .002$ (.051)	$\pm .002$ (.051)	$\pm .002$ (.051)	$\pm .003$ (.076)	$\pm .003$ (.076)
Minimum Length	1 (25.40)	1 (25.40)	1 (25.40)	1 (25.40)	1 (25.40)	1 $\frac{1}{4}$ (31.75)	1 $\frac{3}{4}$ (44.45)
Maximum Length	36 (914)	36 (914)	48 (1219)	60 (1524)	72 (1829)	72 (1829)	72 (1829)
Length Tolerance Heaters up to 5" (127 mm) long	$\pm \frac{3}{32}$ (2.4)	$\pm \frac{3}{32}$ (2.4)	$\pm \frac{3}{32}$ (2.4)	$\pm \frac{3}{32}$ (2.4)	$\pm \frac{3}{32}$ (2.4)	$\pm \frac{1}{8}$ (3.2)	$\pm \frac{1}{8}$ (3.2)
Length Tolerance Heaters over 5" (127 mm) long	$\pm 2\%$ of Sheath Length						
Camber Tolerance Heaters to 12" (305 mm) long	.010"(.254 mm) per foot of length						
Camber Tolerance Heaters over 12" (305 mm) long	.020"(.508 mm) per foot of length						

## ELECTRICAL SPECIFICATIONS

Nominal Diameter	$\frac{1}{4}$	$\frac{5}{16}$	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{5}{8}$	$\frac{3}{4}$	<b>1</b>
Maximum Voltage	240	240	240	240	480*	480*	480*
Maximum Amperage (see next line for exceptions)	4.4	4.5	6.7	10.5	23	23	23
Maximum Amperage for Types F, F1, W, W3, M3, S1 and S2 Terminations	2.5	2.5	4	7	10	10	10
Minimum Wattage at 120V on a 1" long Heater	50	45	45	50	50	—	—
Minimum Wattage at 120V on a 2" long Heater	20	20	20	20	20	20	20
Maximum Wattage at 120V	525	540	800	1260	2760	2760	2760
Maximum Wattage at 240V	1050	1080	1600	2520	5520	5520	5520
Maximum Wattage at 480V	—	—	—	—	11,000	11,000	11,000
Wattage Tolerance	Plus 5%, Minus 10%						
Resistance Tolerance	Plus 10%, Minus 5%						

\*480V when applicable. Consult Tempco.

## CALCULATING WATTAGE REQUIREMENTS

×  
÷  
±  
≥  
≤  
—  
+  
≡  
=  
>  
<

**Formulas and related data** to calculate wattage requirements are detailed in the Engineering Section located in the back of this catalog. For new applications it is recommended that testing under actual operating conditions be performed to confirm wattage and watt density calculations.

An excellent evaluation method is to power up a heater with the calculated wattage and watt density through a variable voltage transformer. By changing the voltage and therefore the heater output, thermocouples sensing heater and process temperature can verify the design.

### Recommendations for improving the life of Tempco Hi-Density Cartridge Heaters

**Tempco Hi-Density Cartridge Heaters** have been widely used in many demanding and diverse applications during the past quarter century. The commonly used basic applications are platen, plastic mold and die heating, liquid immersion and air heating.



Selection of the wrong termination for the particular application is the major reason for all heater failures. However, failure to consider other important criteria can also have a negative effect on the life of the heater. To get the best performance and assure long life, it is important to carefully evaluate the following factors.

#### Operating Temperature

Operating temperature of a heater is a major factor in determining the life expectancy of a heating element. The heater life depends on the actual temperature of the resistance wire within the heater and not on the process operating temperature. The graph in Fig. 1 demonstrates the proper relationship between operating temperature and watt density; the higher the operating temperature the lower the maximum recommended watt density.

#### Heater Watt Density

Cartridge heater watt density is defined as the wattage dissipated per square inch of the heated sheath surface. For a particular application a heater's watt density governs internal resistance wire temperature, which determines the outer sheath temperature. These factors are critical to the proper heating of the application and to the life expectancy of the heater. Special construction features that promote excellent heat transfer permit Hi-Density Cartridge Heaters to operate at higher watt densities while maintaining the lowest possible resistance wire temperatures of any style cartridge heaters.

Heater watt density ( $w/in^2$ ) is calculated using the following formula:

$$\text{Watt Density} = \frac{\text{Heater wattage}}{\text{Heated length} \times \text{Heater diameter} \times 3.1416}$$

Heated length is the overall length of the heater minus any unheated (cold) sections. Standard Type N, Hi-Density cartridge heaters have  $\frac{3}{8}$ " at the lead end and  $\frac{1}{4}$ " at the disc end unheated. This would mean a 6" long heater would have 5 $\frac{3}{8}$ " effective heated length. Unheated sections vary with type of heater termination. For descriptions of terminations and options, see pages 2-31 through 2-47.


The graph in Fig. 1 shows the maximum recommended watt density for Hi-Density Cartridge Heaters when used in a steel platen. Watt density limitations for various materials are given in the engineering section of this catalog. For liquid immersion heaters the maximum watt density depends on the type of liquid being heated. The more viscous, or thicker the liquid, the lower the maximum watt density. Higher watt density can cause the liquid to carbonize and accumulate on the heater sheath, which will cause premature heater failure. It is advisable to use heaters that have watt densities below the maximum recommended watt density to get the longest heater life. If the actual heater watt density is close to the maximum recommended watt density, you can correct the problem by

1. Increasing the number, diameter and length of heaters.
2. Lowering the total wattage; however, this may increase the heat-up time.
3. Obtaining tighter fit (see Fig. 2 — Determining Fit).

A Hi-Density cartridge heater designed at the maximum recommended watt density allows the smallest heater to be used to obtain the required wattage with good service life. All things being equal, using a lower watt density heater will typically provide optimized service life.

FIG.


### 1 Recommended watt density for heating metal parts

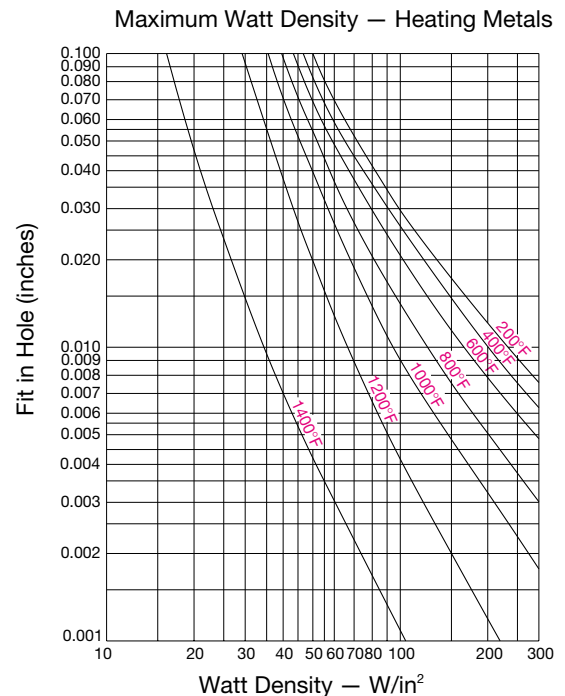

The graph shows the recommended maximum watt density for Tempco Hi-Density cartridge heaters at different operating temperatures and fit, when the heater is installed in an oxidized mild steel block. The thermocouple is located  $\frac{1}{2}$ " from the heater. When heating other materials, the data needs to be extrapolated based on the thermal conductivity of the material. Consult Tempco with your requirements.

FIG.

### 2 Determining Fit



Determining Fit (see next page)



## Determining Fit

When heating a platen, mold, die or hot runner probe with Hi-Density Cartridge Heaters inserted into drilled holes, fit is an important factor in determining the life expectancy of the heater. Fit is the difference between the minimum diameter of the cartridge heater and the maximum diameter of the hole. Unheated sections on a Hi-Density cartridge may be smaller in diameter due to swaging. To determine fit, use the smallest diameter only on the heated length.

**Example:** A 3/8" nominal OD Hi-Density cartridge heater has an actual diameter of .371" ±.002, which translates to a minimum diameter of .369". If used in a .375" ±.003 hole, the fit would be .009" (.378" - .369" = .009").

When medium watt density heaters (less than 60 watts per square inch) are used in low temperature applications (less than 600°F [315°C]) general purpose drills are commonly used to drill holes. The typical hole size may be .003" to .008" over the drill size. For higher watt density and/or higher temperature applications, we recommend that the holes are drilled and reamed for the tightest possible fit. In applications where precise temperature control and heat transfer properties are required, Hi-Density cartridge heaters can be centerless ground to ±.0005".

Although a tighter fit is desirable to efficiently transfer heat and to get long heater life, a looser fit will aid in installing and removing heaters, especially long heaters. We recommend that you apply Tempco's BNS anti-seize cartridge heater coating as it will improve heat transfer and will make the removal of heaters easier.

The graph in Fig 1. shows the effect of fit in determining the maximum recommended watt density on a steel platen. As it is indicated in the graph the tighter the fit, the higher the maximum recommended watt density.

## Temperature Control and Location of Temperature Sensing Device

In order to better control the heater temperature and hence the resistance wire temperature, use of an appropriate temperature control and the proximity of the heater to the sensor is very important. The graph in Fig. 1 shows the effect of operating temperature in determining the maximum recommended watt density on a steel platen where the sensor is located 1/2" from the heater. Higher watt density heaters can generate heat faster than the surrounding area's ability to dissipate heat. This creates a thermal lag between the heater and the sensor. The closer the sensor to the heater, the better you can control the heater temperature. By keeping the sensor further from the heater, temperature gradients of several hundred degrees can be observed in many applications, especially during initial start-up and heavy thermal cycling. Although the set operating temperature may be low, the heater may be running at a very high temperature. This is a common cause of heater failure. This can be minimized using time proportional and PID functions of the temperature controllers. See Section 13 for temperature controllers and Section 14 for thermocouples and sensors.

## Power Control

Power control methods affect the life expectancy of heating elements. In general, although economical, on-off controls increase thermal fatigue and oxidation rate on heating elements by causing wide temperature swings of the internal heating element. Silicone controlled rectifiers (SCR's), Mercury Relays and solid state power controls can increase the life expectancy of heating elements by reducing the temperature swings of the internal heating element. See Section 13 for power controls.

## Common Causes of Cartridge Heater Failures

### Contamination

Contamination is a major cause of heater failure. Moisture, hydraulic oils, and melted plastic are the most common contaminants that are seen on failed heaters. Since the magnesium oxide insulation in a Hi-Density heater is hygroscopic in nature, moisture is easily absorbed into the heaters and typically results in premature heater failure. Moisture absorption during machine washdown or cleanup is a frequent problem. These contaminants, which are electrically conductive, will short out the heater. Most probably, the failures will be at the lead end of the heater and in some cases can split or blow a hole on the heater sheath. The disc end of a Hi-Density cartridge heater is welded shut with a stainless steel disc.

Generally contaminants enter the heater through the lead end of the heater. The high temperature lead wires used on Hi-Density heaters have fiberglass or mica insulation. Oil and moisture can wick through the insulation on the lead wire into the heater. Tempco offers a wide variety of terminations to avoid this problem, including epoxy seals, Teflon® seals, convoluted cables, welded end discs and Teflon® insulated lead wires. However, there are temperature limitations on many of these terminations.



If you should encounter premature cartridge heater failure, consult Tempco. Our team of professionals will have the solution to your problem.

### Excessive Flexing of Leads

Tempco Hi-Density heaters use flexible grade A nickel stranded lead wires with fiberglass or mica insulation. On certain terminations the lead wires are connected externally to solid nickel conductor pins. In applications where there is excessive movement or vibration, the solid pins could break due to fatigue. A simple solution is to give enough slack on the leads to minimize the stress on the solid pins or provide an internal lead wire connection within the heater. Tempco also offers strain relief brackets and springs to prevent this problem.

Where heater leads can wear out by abrasion due to excessive flexing of the leads, Tempco offers several abrasion resistant terminations. See pages 2-31 through 2-43.

### Lack of Heat Sink

Hi-Density heaters are designed with minimum unheated (cold) sections. If the heated sections project from the platen or mold, these sections will get extremely hot due to lack of heat transfer. This will lead to premature heater failure. Tempco can manufacture heaters with unheated (cold) sections anywhere along the length of the heater to prevent overheating of the heater sheath.

When a Hi-Density heater is used as a liquid immersion heater, make sure the heater's sheath length is completely immersed in the liquid. The heater lead end should not be immersed in liquid, since most of the lead end seals are only moisture resistant, not moisture proof.



### High Operating Temperature

Tempco Hi-Density heaters are designed to operate at sheath temperatures up to 1500°F (815°C). When process temperatures approach the maximum heater sheath temperature, make sure the sheath temperature doesn't exceed its limitations. Location of the thermocouple and the type of temperature and power controls are factors that affect sheath temperature and potential overshoot conditions.

Although the heater is designed to run at temperatures up to 1500°F (815°C), heater lead wires and terminations are rated for much lower temperatures. Care should be taken to make sure that the heater lead end temperatures do not exceed their limitations. Heaters can be made longer with unheated sections at the lead end to bring the lead end out of the high temperature area. Tempco can also provide you with a high temperature wiring harness, which can withstand temperatures up to 1500°F (815°C). See page 15-13 in the accessories section for details.



As it is explained in the above paragraphs, the single major cause for cartridge heater failure is the selection of the wrong type of heater lead end termination for the specific application. To assist you in selecting the right termination type, pages 2-31 through 2-43 give detailed descriptions of over 40 terminations designed to solve many of the common application problems. If you need further assistance, consult Tempco.

### High Wattage Rating

Heaters with very high wattage ratings can create temperature overshoots, uneven temperature distribution and high heater sheath temperatures, causing premature heater failure.

For liquid immersion heaters, maximum watt density depends on the type of liquid being heated. The heavier or thicker the liquid, the lower the maximum watt density. Higher watt density can cause the liquid to carbonize and accumulate on the heater sheath, which will cause premature heater failure.

### Scale and Sludge Build-up

In liquid immersion applications, periodic cleaning of the heater sheath is necessary to remove any scale buildup on the sheath. Scale can accumulate on the sheath and cause the heater to overheat and fail. When used to heat liquid in a tank, be sure to clean any sludge from the bottom of the tank. A heater sheath covered with sludge will overheat and fail.

### Important Installation Considerations

1. For closest fit and best heat transfer, use reamed holes.
2. When possible, drill holes through the object being heated. This will make heater removal easier.
3. When using an anti-seize coating like Tempco's BNS spray or paste, *do not apply* over lead wires or any other current carrying conductors.
4. When using insulated tape or sleeving, check to make sure they are rated for the temperature of the application. Lower temperature rated materials can contain an adhesive or binder that can carbonize and become electrically conductive.
5. When using heaters near their maximum recommended watt density, it is recommended the temperature sensing probes be approximately 1/2" from the heater sheath.
6. Lead wires should not be located in the hole containing the cartridge heater during operation. This may cause the lead wires to be exposed to temperatures above their rated temperature.
7. When used in a vacuum application, make sure the lead end of the heater is outside the vacuum. If the lead has to be in the vacuum, consult Tempco for specific recommendations.
8. Many applications will subject a heater's electrical terminations to one or more of the following potentially damaging conditions:
  - Moisture
  - Flexing
  - Oil and other contaminants
  - Abrasion
  - High temperature

**Note:** To protect the heater from damage in these harsh environments, Tempco has a wide selection of terminations and options available. See page 2-31 through 2-47 for details.

### BNS Anti-Seize Cartridge Heater Coating

This high temperature, electrically insulating and thermally conductive coating will minimize oxidation and improve heat transfer from heater to the object being heated.

Brush a thin layer of paste or spray lightly over the cartridge heater prior to inserting the heater into a hole.



Do not apply over lead wires or other bare current carrying conductors, since the water in the paste and spray can cause an electrical short circuit.



**13 oz.**  
Aerosol spray can  
**Part Number:**  
CML00010

- Temperature Range 1562°F (850°C)
- High Heat Transfer



**4 oz.**  
Paste w/brush applicator top  
**Part Number:** CML00020

- Temperature Range 1562°F (850°C)
- High Heat Transfer



Formulated to assist in the removal of cartridge heaters.



# THE TERMINATOR ADVANTAGE...



## Custom Terminated Hi-Density Cartridge Heaters in a hurry!

Tempco Terminator Lead Conversion Program guarantees 24 to 48 hours shipping on custom terminated Hi-Density Cartridge Heaters. We maintain over 65,000 Cartridge Heaters in stock in order to offer you over 1000 standard sizes and electrical ratings and 26 lead terminations to select from. For details see Pages 2-18 and 2-19.

**STOCK ITEMS**  
ORDER NOW!

**1/4" Diameter**

**SAME DAY SHIPMENT**  
on stock items **2 PM**  
ORDERED BY **CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
1 25.4	50	127	20	HDC00001	—
1 25.4	80	204	32	HDC00002	—
1 25.4	100	255	40	HDC00003	HDC00004
1 25.4	150	382	59	HDC00005	—
1 1/8 28.6	100	204	32	HDC00006	—
1 1/4 31.8	50	85	13	HDC00007	—
1 1/4 31.8	75	127	20	HDC00008	—
1 1/4 31.8	100	170	26	HDC00009	—
1 1/4 31.8	125	212	33	HDC00010	—
1 1/4 31.8	150	255	40	HDC00011	HDC00012
1 1/4 31.8	200	340	53	—	HDC00013
1 1/4 31.8	225	382	59	—	HDC00014
1 1/2 38.1	50	64	10	HDC00015	—
1 1/2 38.1	100	127	20	HDC00016	HDC00017
1 1/2 38.1	150	191	30	HDC00018	HDC00019
1 1/2 38.1	175	223	35	HDC00020	HDC00021
1 1/2 38.1	200	255	40	HDC00022	HDC00023
1 1/2 38.1	250	318	49	—	HDC00024
1 3/4 44.5	75	76	12	HDC00025	—
1 3/4 44.5	150	153	24	HDC00026	—
1 3/4 44.5	300	306	47	—	HDC00027
2 50.8	50	42	7	HDC00028	—
2 50.8	80	68	11	HDC00029	—
2 50.8	100	85	13	HDC00030	HDC00031
2 50.8	125	106	17	HDC00032	HDC00033
2 50.8	150	127	20	HDC00034	HDC00035
2 50.8	200	170	26	HDC00036	HDC00037
2 50.8	250	212	33	HDC00038	HDC00039
2 50.8	300	255	40	—	HDC00040
2 1/4 57.2	200	146	23	—	HDC00041
2 1/2 63.5	150	95	15	—	HDC00042
2 1/2 63.5	200	127	20	HDC00043	HDC00044
2 1/2 63.5	250	159	25	HDC00045	HDC00046
2 1/2 63.5	350	223	35	—	HDC00047
2 3/4 69.9	200	113	18	—	HDC00048
3 76.2	75	38	6	HDC00049	—
3 76.2	100	51	8	HDC00050	HDC00051
3 76.2	125	64	10	—	HDC00052
3 76.2	150	76	12	HDC00053	HDC00054

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
3 76.2	200	102	16	HDC00055	HDC00056
3 76.2	250	127	20	HDC00057	HDC00058
3 76.2	300	153	24	HDC00059	HDC00060
3 76.2	350	178	28	—	HDC00061
3 1/2 88.9	200	85	13	—	HDC00062
3 1/2 88.9	300	127	20	HDC00063	HDC00064
3 3/4 95.3	300	118	18	—	HDC00065
4 101.6	100	36	6	HDC00066	—
4 101.6	150	55	9	HDC00067	—
4 101.6	175	64	10	HDC00068	HDC00069
4 101.6	200	73	11	HDC00070	HDC00071
4 101.6	250	91	14	HDC00072	HDC00073
4 101.6	300	109	17	HDC00074	HDC00075
4 101.6	400	146	23	—	HDC00076
4 1/2 114.3	125	40	6	HDC00077	—
4 1/2 114.3	200	64	10	HDC00078	—
4 1/2 114.3	500	159	25	—	HDC00079
5 127.0	200	57	9	—	HDC00080
5 127.0	250	71	11	—	HDC00081
5 127.0	350	99	15	HDC00082	HDC00083
5 127.0	400	113	18	HDC00084	HDC00085
5 3/4 146.1	350	85	13	HDC00086	HDC00087
6 152.4	150	35	5	HDC00088	—
6 152.4	200	46	7	—	HDC00089
6 152.4	300	69	11	HDC00090	HDC00091
6 152.4	400	93	14	HDC00092	HDC00093
6 152.4	450	104	16	HDC00094	HDC00095
6 152.4	600	139	22	—	HDC00096
6 1/2 165.1	500	106	17	HDC00097	HDC00098
7 177.8	600	118	18	—	HDC00099
7 1/2 190.5	525	95	15	HDC00100	—
8 203.2	300	51	8	HDC00101	—
8 203.2	600	102	16	—	HDC00102
9 228.6	675	101	16	—	HDC00103
9 1/2 241.3	525	74	12	HDC00104	—
10 254.0	750	101	16	—	HDC00105
11 279.4	600	73	11	—	HDC00106
13 330.2	725	74	12	—	HDC00107





**STOCK ITEMS**  
**ORDER NOW!**

### 5/16" Diameter

**SAME DAY SHIPMENT**  
**on stock items** **2 PM**  
**ORDERED BY** **CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
2	50.8	150	102	16	HDC00108 —
2½	63.5	150	76	12	HDC00109 —
2½	63.5	200	102	16	HDC00110 HDC00111
3	76.2	225	92	14	HDC00112 HDC00113
3¾	85.7	160	57	9	HDC00114 —
3½	88.9	250	85	13	HDC00115 HDC00116

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
4	101.6	275	80	12	HDC00117 HDC00118
5	127.0	350	79	12	HDC00119 HDC00120
5½	139.7	250	51	8	HDC00121 —
6	152.4	450	83	13	HDC00122 HDC00123
7½	190.5	600	87	14	— HDC00124

**STOCK ITEMS**  
**ORDER NOW!**

### 3/8" Diameter

**SAME DAY SHIPMENT**  
**on stock items** **2 PM**  
**ORDERED BY** **CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
1	25.4	50	85	13	HDC00125 —
1	25.4	75	127	20	HDC00126 —
1	25.4	100	170	26	HDC00127 —
1	25.4	150	255	40	HDC00128 HDC00129
1	25.4	200	340	53	— HDC00130
1¼	31.8	50	57	9	HDC00131 —
1¼	31.8	75	85	13	HDC00132 —
1¼	31.8	100	113	18	HDC00133 —
1¼	31.8	125	141	22	HDC00134 —
1¼	31.8	150	170	26	HDC00135 HDC00136
1¼	31.8	200	226	35	HDC00137 HDC00138
1⅝	33.3	100	104	16	HDC00139 HDC00140
1⅝	33.3	150	157	24	HDC00141 —
1⅝	34.9	150	146	23	HDC00142 HDC00143
1⅝	36.5	100	91	14	HDC00144 HDC00145
1½	38.1	30	25	4	HDC00146 —

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
1½	38.1	50	42	7	HDC00147 HDC00148
1½	38.1	75	64	10	HDC00149 —
1½	38.1	100	85	13	HDC00150 HDC00151
1½	38.1	125	106	17	— HDC00152
1½	38.1	150	127	20	HDC00153 HDC00154
1½	38.1	200	170	26	HDC00155 HDC00156
1½	38.1	250	212	33	HDC00157 HDC00158
1¾	44.5	125	85	13	HDC00159 —
1¾	44.5	150	102	16	HDC00160 HDC00161
1¾	44.5	175	119	18	HDC00162 —
1¾	44.5	200	136	21	— HDC00163
1¾	44.5	250	170	26	HDC00164 HDC00165
1⅞	46.0	150	97	15	— HDC00166
1⅞	46.0	200	129	20	HDC00167 —
1⅞	46.0	250	162	25	— HDC00168
1⅞	47.6	250	154	24	HDC00169 —



Type N Termination with leads **other** than 10" is available. Please specify lead length at time of ordering, and a new Part Number will be issued.

**CONTINUED**

### How to Order

#### Catalog Heaters

The Part Numbers listed are for Hi-Density Cartridge Heaters with Type N Termination, leads 10" long. For Type N Termination with leads other than 10" specify lead length at time of ordering, and a new Part Number will be issued.

*Stock Hi-Density Cartridge Heaters can be Custom Terminated to ship within 24 to 48 hours through...*

**The TERMINATOR**  **Lead Conversion Program**  
For details see pages 2-18 and 2-19.



#### Custom Engineered/Manufactured Heaters

For details on how to order Custom Manufactured Hi-Density Cartridge Heaters see page 2-17.



**STOCK ITEMS**  
**ORDER NOW!**

# 3/8" Diameter

**SAME DAY SHIPMENT**  
 on stock items **2 PM**  
 ORDERED BY **CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
2	50.8	50	28	4	HDC00170	—
2	50.8	75	42	7	HDC00171	—
2	50.8	100	57	9	HDC00172	HDC00173
2	50.8	125	71	11	HDC00174	—
2	50.8	150	85	13	HDC00175	HDC00176
2	50.8	200	113	18	HDC00177	HDC00178
2	50.8	250	141	22	HDC00179	HDC00180
2	50.8	300	170	26	HDC00181	HDC00182
2	50.8	350	198	31	—	HDC00183
2	50.8	400	226	35	HDC00184	HDC00185
2	50.8	500	283	44	HDC00186	HDC00187
2 1/8	54.0	200	104	16	—	HDC00188
2 1/4	57.2	75	36	6	HDC00189	—
2 1/4	57.2	100	49	8	HDC00190	—
2 1/4	57.2	125	61	9	HDC00191	HDC00192
2 1/4	57.2	150	73	11	—	HDC00193
2 1/4	57.2	175	85	13	HDC00194	HDC00195
2 1/4	57.2	200	97	15	—	HDC00196
2 1/4	57.2	250	121	19	HDC00197	HDC00198
2 1/4	57.2	300	146	23	HDC00199	HDC00200
2 1/4	57.2	350	170	26	HDC00201	HDC00202
2 1/4	57.2	375	182	28	HDC00203	—
2 1/4	57.2	400	194	30	—	HDC00204
2 1/4	57.2	500	243	38	—	HDC00205
2 3/8	60.3	75	34	5	HDC00206	—
2 3/8	60.3	165	75	12	—	HDC00207
2 3/8	60.3	200	91	14	HDC00208	HDC00209
2 3/8	60.3	300	136	21	—	HDC00210
2 3/8	60.3	400	181	28	HDC00211	—
2 1/2	63.5	50	21	3	HDC00212	—
2 1/2	63.5	100	42	7	HDC00213	HDC00214
2 1/2	63.5	125	53	8	HDC00215	—
2 1/2	63.5	150	64	10	—	HDC00216
2 1/2	63.5	200	85	13	HDC00217	HDC00218
2 1/2	63.5	250	106	17	HDC00219	HDC00220
2 1/2	63.5	300	127	20	HDC00221	HDC00222
2 1/2	63.5	350	149	23	—	HDC00223
2 1/2	63.5	400	170	26	HDC00224	HDC00225
2 1/2	63.5	450	191	30	—	HDC00226
2 1/2	63.5	500	212	33	HDC00227	HDC00228
2 3/4	69.9	100	38	6	HDC00229	—
2 3/4	69.9	125	47	7	HDC00230	—
2 3/4	69.9	400	151	23	—	HDC00231
2 3/4	69.9	500	189	29	—	HDC00232
2 13/16	71.4	60	22	3	HDC00233	—
2 13/16	71.4	250	92	14	HDC00234	—
2 13/16	71.4	300	110	17	—	HDC00235
3	76.2	100	34	5	HDC00236	HDC00237
3	76.2	125	42	7	HDC00238	—
3	76.2	150	51	8	HDC00239	—
3	76.2	200	68	11	HDC00240	HDC00241
3	76.2	250	85	13	HDC00242	HDC00243
3	76.2	300	102	16	HDC00244	HDC00245
3	76.2	350	119	18	—	HDC00246
3	76.2	375	127	20	HDC00247	HDC00248
3	76.2	400	136	21	HDC00249	HDC00250

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
3	76.2	500	170	26	HDC00251	HDC00252
3	76.2	600	204	32	—	HDC00253
3	76.2	750	255	40	—	HDC00254
3 1/16	84.1	500	151	23	HDC00255	—
3 1/2	88.9	125	35	6	HDC00256	—
3 1/2	88.9	200	57	9	—	HDC00257
3 1/2	88.9	225	64	10	—	HDC00258
3 1/2	88.9	250	71	11	HDC00259	HDC00260
3 1/2	88.9	300	85	13	HDC00261	HDC00262
3 1/2	88.9	350	99	15	HDC00263	HDC00264
3 1/2	88.9	400	113	18	—	HDC00265
3 1/2	88.9	500	141	22	HDC00266	HDC00267
3 3/4	95.3	300	78	12	—	HDC00268
3 13/16	96.8	150	38	6	HDC00269	—
3 13/16	96.8	500	128	20	—	HDC00270
3 13/16	96.8	600	154	24	—	HDC00271
4	101.6	100	24	4	HDC00272	—
4	101.6	125	30	5	HDC00273	HDC00274
4	101.6	150	36	6	HDC00275	—
4	101.6	175	42	7	HDC00276	—
4	101.6	200	49	8	HDC00277	HDC00278
4	101.6	250	61	9	HDC00279	HDC00280
4	101.6	300	73	11	HDC00281	HDC00282
4	101.6	350	85	13	HDC00283	HDC00284
4	101.6	400	97	15	HDC00285	HDC00286
4	101.6	450	109	17	HDC00287	HDC00288
4	101.6	500	121	19	HDC00289	HDC00290
4	101.6	550	133	21	HDC00291	—
4	101.6	600	146	23	—	HDC00292
4	101.6	700	170	26	—	HDC00293
4	101.6	750	182	28	—	HDC00294
4 1/4	108.0	300	68	11	—	HDC00295
4 1/4	108.0	750	170	26	—	HDC00296
4 1/2	114.3	250	53	8	—	HDC00297
4 1/2	114.3	300	64	10	HDC00298	HDC00299
4 1/2	114.3	350	74	12	—	HDC00300
4 1/2	114.3	425	90	14	—	HDC00301
4 1/2	114.3	450	95	15	HDC00302	HDC00303
4 1/2	114.3	500	106	17	HDC00304	HDC00305
4 3/4	120.7	300	60	9	HDC00306	HDC00307
4 13/16	122.2	300	59	9	—	HDC00308
4 13/16	122.2	500	98	15	—	HDC00309
5	127.0	130	25	4	HDC00310	HDC00311
5	127.0	150	28	4	HDC00312	HDC00313
5	127.0	200	38	6	HDC00314	HDC00315
5	127.0	250	47	7	HDC00316	—
5	127.0	300	57	9	HDC00317	HDC00318
5	127.0	350	66	10	—	HDC00319
5	127.0	400	75	12	HDC00320	HDC00321
5	127.0	450	85	13	—	HDC00322
5	127.0	500	94	15	HDC00323	HDC00324
5	127.0	520	98	15	—	HDC00325
5	127.0	550	104	16	—	HDC00326
5	127.0	600	113	18	—	HDC00327
5	127.0	700	132	21	—	HDC00328
5	127.0	750	141	22	—	HDC00329



Type N Termination with leads **other** than 10" is available. Please specify lead length at time of ordering, and a new Part Number will be issued.



**STOCK ITEMS**  
**ORDER NOW!**

**3/8" Diameter**

**SAME DAY SHIPMENT**  
**on stock items** **2<sup>PM</sup>**  
**ORDERED BY** **CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length in (mm)	Watts	Watt Density		Part Number		
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V	
5	127.0	800	151	23	—	HDC00330
5	127.0	1000	189	29	—	HDC00331
5¼	133.3	200	36	6	—	HDC00332
5½	139.7	200	34	5	—	HDC00333
5½	139.7	250	42	7	HDC00334	HDC00335
5½	139.7	350	59	9	—	HDC00336
5½	139.7	400	68	11	—	HDC00337
5½	139.7	550	93	15	—	HDC00338
5½	139.7	600	102	16	—	HDC00339
5½	139.7	1000	170	26	—	HDC00340
5¾	146.1	400	65	10	—	HDC00341
5¾	146.1	600	97	15	HDC00342	HDC00343
6	152.4	200	31	5	HDC00344	—
6	152.4	250	39	6	HDC00345	HDC00346
6	152.4	300	46	7	HDC00347	HDC00348
6	152.4	400	62	10	HDC00349	HDC00350
6	152.4	500	77	12	HDC00351	HDC00352
6	152.4	600	93	14	HDC00353	HDC00354
6	152.4	675	104	16	—	HDC00355
6	152.4	750	116	18	HDC00356	HDC00357
6	152.4	800	123	19	—	HDC00358
6	152.4	900	139	22	—	HDC00359
6	152.4	1000	154	24	—	HDC00360
6½	165.1	600	85	13	—	HDC00361
6½	165.1	1000	141	22	—	HDC00362
6¾	171.5	300	41	6	—	HDC00363
7	177.8	200	26	4	—	HDC00364
7	177.8	250	33	5	HDC00365	HDC00366
7	177.8	350	46	7	—	HDC00367
7	177.8	400	52	8	HDC00368	—
7	177.8	500	65	10	—	HDC00369
7	177.8	600	78	12	HDC00370	HDC00371
7	177.8	675	88	14	—	HDC00372
7	177.8	750	98	15	—	HDC00373
7	177.8	775	101	16	—	HDC00374
7	177.8	1000	131	20	—	HDC00375
7¼	184.2	300	38	6	—	HDC00376
7½	190.5	600	73	11	—	HDC00377
7½	190.5	725	88	14	—	HDC00378
7½	190.5	850	103	16	—	HDC00379

Sheath Length in (mm)	Watts	Watt Density		Part Number		
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V	
7½	190.5	1000	121	19	—	HDC00380
7½	198.4	750	87	14	—	HDC00381
8	203.2	300	34	5	HDC00382	HDC00383
8	203.2	400	45	7	HDC00384	—
8	203.2	450	51	8	HDC00385	—
8	203.2	500	57	9	HDC00386	HDC00387
8	203.2	600	68	11	HDC00388	HDC00389
8	203.2	700	79	12	—	HDC00390
8	203.2	750	85	13	—	HDC00391
8	203.2	900	102	16	—	HDC00392
8	203.2	1000	113	18	—	HDC00393
8½	215.9	350	37	6	—	HDC00394
8½	219.1	500	52	8	—	HDC00395
9	228.6	200	20	3	HDC00396	HDC00397
9	228.6	500	50	8	—	HDC00398
9	228.6	885	88	14	—	HDC00399
9	228.6	1000	100	16	—	HDC00400
9½	241.3	200	19	3	HDC00401	—
9½	241.3	600	57	9	—	HDC00402
9½	241.3	1000	94	15	—	HDC00403
9¾	247.7	600	55	9	—	HDC00404
10	254.0	400	36	5	HDC00405	—
10	254.0	500	45	7	HDC00406	HDC00407
10	254.0	600	54	8	HDC00408	HDC00409
10	254.0	700	63	10	—	HDC00410
10	254.0	750	67	10	—	HDC00411
10	254.0	800	71	11	—	HDC00412
10	254.0	1000	89	14	—	HDC00413
10	254.0	1125	101	16	—	HDC00414
10	254.0	1500	134	21	—	HDC00415
10½	274.6	375	31	5	—	HDC00416
12	304.8	400	30	5	HDC00417	—
12	304.8	500	37	6	—	HDC00418
12	304.8	600	44	7	HDC00419	HDC00420
12	304.8	1000	74	11	—	HDC00421
12	304.8	1000	69	11	—	HDC00422
12½	325.4	1000	69	11	—	HDC00423
14	355.6	750	47	7	—	HDC00424
16	406.4	1200	66	10	—	HDC00425
17	431.8	600	31	5	—	HDC00425

### How to Order

#### Catalog Heaters

The Part Numbers listed are for Hi-Density Cartridge Heaters with Type N Termination, leads 10" long. For Type N Termination with leads other than 10" specify lead length at time of ordering, and a new Part Number will be issued.



**Stock Hi-Density Cartridge Heaters can be Custom Terminated to ship within 24 to 48 hours through...**

**The TERMINATOR**  **Lead Conversion Program**

For details see pages 2-18 and 2-19.

#### Custom Engineered/Manufactured Heaters

For details on how to order Custom Manufactured Hi-Density Cartridge Heaters see page 2-17.



**STOCK ITEMS**  
**ORDER NOW!**

# 1/2" Diameter

**SAME DAY SHIPMENT**  
**on stock items**  
**ORDERED BY 2 PM CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length in (mm)	Watts	Watt Density		Part Number		
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V	
1	25.4	50	64	10	HDC00426	—
1	25.4	150	191	30	HDC00427	—
1	25.4	200	255	40	—	HDC00428
1 1/4	31.8	50	42	7	HDC00429	—
1 1/4	31.8	125	106	17	HDC00430	HDC00431
1 1/4	31.8	180	153	24	—	HDC00432
1 1/4	31.8	200	170	26	—	HDC00433
1 1/4	31.8	250	212	33	—	HDC00434
1 1/2	38.1	50	32	5	HDC00435	—
1 1/2	38.1	150	95	15	HDC00436	HDC00437
1 1/2	38.1	200	127	20	HDC00438	HDC00439
1 3/4	44.5	100	51	8	HDC00440	—
1 3/4	44.5	200	102	16	—	HDC00441
1 3/4	44.5	250	127	20	HDC00442	—
1 3/4	44.5	400	204	32	—	HDC00443
2	50.8	75	32	5	HDC00444	—
2	50.8	150	64	10	HDC00445	—
2	50.8	175	74	12	HDC00446	—
2	50.8	200	85	13	HDC00447	HDC00448
2	50.8	250	106	17	HDC00449	HDC00450
2	50.8	300	127	20	HDC00451	HDC00452
2	50.8	400	170	26	HDC00453	HDC00454
2	50.8	500	212	33	HDC00455	—
2	50.8	600	255	40	—	HDC00456
2	50.8	700	297	46	—	HDC00457
2 1/4	57.2	75	27	4	HDC00458	—
2 1/4	57.2	100	36	6	HDC00459	—
2 1/4	57.2	125	45	7	HDC00460	—
2 1/4	57.2	150	55	9	HDC00461	—
2 1/4	57.2	250	91	14	HDC00462	HDC00463
2 1/4	57.2	300	109	17	—	HDC00464
2 1/4	57.2	400	146	23	HDC00465	HDC00466
2 1/4	57.2	500	182	28	HDC00467	HDC00468
2 1/4	57.2	600	218	34	—	HDC00469
2 3/8	60.3	100	34	5	HDC00470	HDC00471
2 3/8	60.3	125	42	7	HDC00472	—
2 3/8	60.3	250	85	13	HDC00473	HDC00474
2 3/8	60.3	400	136	21	—	HDC00475
2 3/8	60.3	500	170	26	HDC00476	HDC00477
2 1/2	63.5	100	32	5	HDC00478	HDC00479
2 1/2	63.5	125	40	6	HDC00480	—
2 1/2	63.5	150	48	7	—	HDC00481
2 1/2	63.5	200	64	10	HDC00482	HDC00483
2 1/2	63.5	250	80	12	HDC00484	HDC00485
2 1/2	63.5	300	95	15	HDC00486	HDC00487
2 1/2	63.5	350	111	17	—	HDC00488
2 1/2	63.5	400	127	20	HDC00489	HDC00490
2 1/2	63.5	500	159	25	HDC00491	HDC00492
2 3/16	65.1	300	93	14	—	HDC00493
2 3/16	65.1	350	108	17	HDC00494	—
2 3/4	69.9	250	71	11	HDC00495	—
2 3/4	69.9	400	113	18	HDC00496	HDC00497
3	76.2	125	32	5	HDC00498	HDC00499
3	76.2	150	38	6	HDC00500	HDC00501
3	76.2	200	51	8	—	HDC00502
3	76.2	250	64	10	HDC00503	HDC00504
3	76.2	300	76	12	HDC00505	HDC00506
3	76.2	350	89	14	HDC00507	—

Sheath Length in (mm)	Watts	Watt Density		Part Number		
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V	
3	76.2	400	102	16	HDC00508	HDC00509
3	76.2	500	127	20	HDC00510	HDC00511
3	76.2	600	153	24	HDC00512	HDC00513
3	76.2	750	191	30	HDC00514	HDC00515
3	76.2	1000	255	40	HDC00516	—
3 1/2	88.9	250	53	8	HDC00517	HDC00518
3 1/2	88.9	300	64	10	—	HDC00519
3 1/2	88.9	350	74	12	—	HDC00520
3 1/2	88.9	420	89	14	—	HDC00521
3 1/2	88.9	500	106	17	HDC00522	HDC00523
3 1/2	88.9	750	159	25	—	HDC00524
3 1/2	88.9	1000	212	33	—	HDC00525
3 3/4	95.3	500	98	15	—	HDC00526
3 3/8	96.8	250	48	8	—	HDC00527
3 3/8	96.8	500	96	15	HDC00528	—
4	101.6	150	27	4	HDC00529	HDC00530
4	101.6	250	45	7	HDC00531	HDC00532
4	101.6	300	55	9	HDC00533	HDC00534
4	101.6	325	59	9	HDC00535	—
4	101.6	350	64	10	HDC00536	HDC00537
4	101.6	400	73	11	HDC00538	HDC00539
4	101.6	500	91	14	HDC00540	HDC00541
4	101.6	550	100	16	HDC00542	HDC00543
4	101.6	600	109	17	—	HDC00544
4	101.6	750	136	21	HDC00545	HDC00546
4	101.6	1000	182	28	—	HDC00547
4	101.6	1200	218	34	—	HDC00548
4	101.6	1300	236	37	—	HDC00549
4 1/8	109.5	550	92	14	HDC00550	—
4 1/2	114.3	250	40	6	HDC00551	—
4 1/2	114.3	350	56	9	—	HDC00552
4 1/2	114.3	500	80	12	HDC00553	HDC00554
4 1/2	114.3	650	103	16	HDC00555	HDC00556
4 1/2	114.3	750	119	19	HDC00557	HDC00558
4 1/2	114.3	1000	159	25	—	HDC00559
4 3/4	120.7	200	30	5	—	HDC00560
4 3/8	122.2	250	37	6	HDC00561	—
4 3/8	122.2	300	44	7	—	HDC00562
4 3/8	122.2	1000	148	23	—	HDC00563
5	127.0	150	21	3	HDC00564	—
5	127.0	200	28	4	HDC00565	HDC00566
5	127.0	250	35	6	HDC00567	—
5	127.0	300	42	7	—	HDC00568
5	127.0	350	50	8	HDC00569	HDC00570
5	127.0	400	57	9	HDC00571	HDC00572
5	127.0	500	71	11	HDC00573	HDC00574
5	127.0	550	78	12	—	HDC00575
5	127.0	600	85	13	—	HDC00576
5	127.0	625	88	14	—	HDC00577
5	127.0	750	106	17	HDC00578	HDC00579
5	127.0	800	113	18	—	HDC00580
5	127.0	1000	141	22	—	HDC00581
5 1/4	133.4	250	34	5	HDC00582	HDC00583
5 1/4	133.4	1000	134	21	—	HDC00584
5 1/2	139.7	200	25	4	—	HDC00585
5 1/2	139.7	500	64	10	HDC00586	HDC00587
5 1/2	139.7	650	83	13	—	HDC00588
5 1/2	139.7	750	95	15	HDC00589	HDC00590



Type N Termination with leads **other** than 10" is available. Please specify lead length at time of ordering, and a new Part Number will be issued.

**CONTINUED**



### 1/2" Diameter, Continued...

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
5 <sup>3</sup> / <sub>4</sub> 146.1	350	42	7	—	HDC00591
5 <sup>3</sup> / <sub>4</sub> 146.1	700	85	13	HDC00592	HDC00593
5 <sup>3</sup> / <sub>16</sub> 147.6	300	36	6	—	HDC00594
6 152.4	200	23	4	—	HDC00595
6 152.4	250	29	5	HDC00596	HDC00597
6 152.4	300	35	5	HDC00598	HDC00599
6 152.4	350	41	6	HDC00600	HDC00601
6 152.4	450	52	8	—	HDC00602
6 152.4	500	58	9	HDC00603	HDC00604
6 152.4	600	69	11	—	HDC00605
6 152.4	750	87	14	HDC00606	HDC00607
6 152.4	800	93	14	HDC00608	—
6 152.4	850	98	15	HDC00609	HDC00610
6 152.4	875	101	16	—	HDC00611
6 152.4	1000	116	18	HDC00612	HDC00613
6 152.4	1200	139	22	—	HDC00614
6 <sup>1</sup> / <sub>2</sub> 161.9	1000	108	17	—	HDC00615
6 <sup>1</sup> / <sub>2</sub> 165.1	500	53	8	HDC00616	HDC00617
6 <sup>1</sup> / <sub>2</sub> 165.1	1000	106	17	—	HDC00618
6 <sup>3</sup> / <sub>4</sub> 171.5	500	51	8	HDC00619	HDC00620
7 177.8	250	24	4	HDC00621	—
7 177.8	340	33	5	—	HDC00622
7 177.8	400	39	6	—	HDC00623
7 177.8	500	49	8	HDC00624	HDC00625
7 177.8	600	59	9	HDC00626	HDC00627
7 177.8	700	69	11	—	HDC00628
7 177.8	750	73	11	HDC00629	HDC00630
7 177.8	1000	98	15	HDC00631	HDC00632
7 177.8	1500	147	23	—	HDC00633
7 <sup>1</sup> / <sub>2</sub> 190.5	500	45	7	HDC00634	HDC00635
7 <sup>1</sup> / <sub>2</sub> 190.5	1000	91	14	—	HDC00636
7 <sup>3</sup> / <sub>4</sub> 196.9	1000	88	14	—	HDC00637
7 <sup>3</sup> / <sub>4</sub> 196.9	1500	132	20	—	HDC00638
8 203.2	200	17	3	—	HDC00639
8 203.2	300	25	4	HDC00640	HDC00641
8 203.2	500	42	7	HDC00642	HDC00643
8 203.2	600	51	8	—	HDC00644
8 203.2	750	64	10	HDC00645	HDC00646
8 203.2	800	68	11	HDC00647	HDC00648
8 203.2	900	76	12	—	HDC00649
8 203.2	1000	85	13	HDC00650	HDC00651
8 203.2	1175	100	16	—	HDC00652
8 203.2	1200	102	16	—	HDC00653
8 203.2	1500	127	20	—	HDC00654
8 203.2	2000	170	26	—	HDC00655
8 <sup>1</sup> / <sub>2</sub> 215.9	300	24	4	—	HDC00656
8 <sup>1</sup> / <sub>2</sub> 215.9	500	40	6	—	HDC00657
8 <sup>1</sup> / <sub>2</sub> 215.9	1000	80	12	HDC00658	HDC00659

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
8 <sup>3</sup> / <sub>4</sub> 222.3	1000	77	12	—	HDC00660
9 228.6	500	37	6	—	HDC00661
9 228.6	750	56	9	—	HDC00662
9 228.6	1000	75	12	HDC00663	HDC00664
9 228.6	1325	99	15	—	HDC00665
9 228.6	1500	112	17	—	HDC00666
9 <sup>1</sup> / <sub>2</sub> 241.3	500	35	6	—	HDC00667
9 <sup>1</sup> / <sub>2</sub> 241.3	800	57	9	—	HDC00668
9 <sup>1</sup> / <sub>2</sub> 241.3	1000	71	11	—	HDC00669
10 254.0	500	34	5	HDC00670	HDC00671
10 254.0	750	50	8	—	HDC00672
10 254.0	800	54	8	—	HDC00673
10 254.0	1000	67	10	HDC00674	HDC00675
10 254.0	1100	74	11	—	HDC00676
10 254.0	1250	84	13	—	HDC00677
10 254.0	1500	101	16	—	HDC00678
10 254.0	2000	134	21	—	HDC00679
10 <sup>1</sup> / <sub>2</sub> 266.7	1500	95	15	—	HDC00680
11 279.4	500	30	5	HDC00681	—
11 279.4	1000	61	9	—	HDC00682
11 279.4	1500	91	14	—	HDC00683
11 279.4	2000	121	19	—	HDC00684
11 <sup>1</sup> / <sub>2</sub> 292.1	1525	88	14	—	HDC00685
12 304.8	500	28	4	HDC00686	HDC00687
12 304.8	600	33	5	HDC00688	HDC00689
12 304.8	1000	55	9	HDC00690	HDC00691
12 304.8	1100	61	9	—	HDC00692
12 304.8	1500	83	13	—	HDC00693
12 304.8	2000	111	17	—	HDC00694
12 <sup>1</sup> / <sub>2</sub> 317.5	1675	89	14	—	HDC00695
13 <sup>1</sup> / <sub>2</sub> 342.9	500	24	4	—	HDC00696
14 355.6	1000	47	7	—	HDC00697
14 355.6	1700	80	12	—	HDC00698
14 355.6	2300	108	17	—	HDC00699
15 381.0	800	35	5	—	HDC00700
15 381.0	1000	44	7	—	HDC00701
15 381.0	1500	66	10	—	HDC00702
15 381.0	2000	88	14	—	HDC00703
16 406.4	800	33	5	—	HDC00704
16 406.4	1000	41	6	—	HDC00705
16 <sup>1</sup> / <sub>2</sub> 419.1	2200	88	14	—	HDC00706
17 431.8	1000	39	6	—	HDC00707
18 457.2	750	27	4	—	HDC00708
18 457.2	1000	36	6	—	HDC00709
18 457.2	1500	55	9	—	HDC00710
18 457.2	1700	62	10	—	HDC00711
18 457.2	2000	73	11	—	HDC00712

### How to Order

#### Catalog Heaters

The Part Numbers listed are for Hi-Density Cartridge Heaters with Type N Termination, leads 10" long. For Type N Termination with leads other than 10" specify lead length at time of ordering, and a new Part Number will be issued.



Stock Hi-Density Cartridge Heaters can be Custom Terminated to ship within 24 to 48 hours through...

The **TERMINATOR**® **Lead Conversion Program**

For details see pages 2-18 and 2-19.

#### Custom Engineered/Manufactured Heaters

For details on how to order Custom Manufactured Hi-Density Cartridge Heaters see page 2-17.



**STOCK ITEMS**  
**ORDER NOW!**

# 5/8" Diameter

**SAME DAY SHIPMENT**  
 on stock items **2 PM**  
 ORDERED BY **CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
1¼ 31.8	50	34	5	HDC00713	—
1¼ 31.8	200	136	21	HDC00714	HDC00715
1¼ 31.8	250	170	26	HDC00716	HDC00717
1½ 38.1	250	127	20	HDC00719	HDC00720
2 50.8	100	34	5	HDC00721	—
2 50.8	125	42	7	HDC00722	—
2 50.8	200	68	11	HDC00723	HDC00724
2 50.8	250	85	13	HDC00725	HDC00726
2 50.8	300	102	16	—	HDC00727
2 50.8	400	136	21	—	HDC00728
2 50.8	500	170	26	—	HDC00729
2 50.8	750	255	40	—	HDC00730
2¼ 57.2	100	29	5	HDC00731	—
2¼ 57.2	125	36	6	HDC00732	—
2¼ 57.2	250	73	11	HDC00733	HDC00734
2¼ 57.2	350	102	16	HDC00735	HDC00736
2¼ 57.2	400	116	18	—	HDC00737
2¼ 57.2	500	146	23	—	HDC00738
2½ 60.3	280	76	12	HDC00739	HDC00740
2½ 60.3	350	95	15	HDC00741	—
2½ 63.5	180	46	7	HDC00742	—
2½ 63.5	275	70	11	HDC00743	HDC00744
2½ 63.5	400	102	16	HDC00745	HDC00746
2½ 63.5	720	183	28	—	HDC00747
3 76.2	150	31	5	HDC00748	—
3 76.2	180	37	6	HDC00749	—
3 76.2	250	51	8	HDC00750	HDC00751
3 76.2	350	71	11	HDC00752	HDC00753
3 76.2	400	81	13	HDC00754	—
3 76.2	500	102	16	HDC00755	HDC00756
3 76.2	600	122	19	—	HDC00757
3 76.2	720	147	23	—	HDC00758
3 76.2	750	153	24	—	HDC00759
¾ 82.6	200	37	6	HDC00760	—
¾ 82.6	800	148	23	—	HDC00761
¾ 88.9	525	89	14	—	HDC00762
¾ 95.3	525	82	13	HDC00763	HDC00764
¾ 95.3	750	118	18	—	HDC00765
4 101.6	250	36	6	HDC00766	HDC00767
4 101.6	300	44	7	—	HDC00768
4 101.6	350	51	8	HDC00769	—
4 101.6	400	58	9	—	HDC00770
4 101.6	500	73	11	HDC00771	HDC00772
4 101.6	550	80	12	—	HDC00773
4 101.6	600	87	14	—	HDC00774
4 101.6	750	109	17	HDC00775	HDC00776
4 101.6	1000	146	23	—	HDC00777
4½ 114.3	250	32	5	—	HDC00778
4½ 114.3	300	38	6	—	HDC00779
4½ 114.3	500	64	10	—	HDC00780
4½ 114.3	700	89	14	HDC00781	HDC00782
4½ 114.3	750	95	15	HDC00783	HDC00784
4½ 114.3	1000	127	20	—	HDC00785
4¾ 120.7	250	30	5	—	HDC00786
4¾ 120.7	750	90	14	—	HDC00787

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
5 127.0	250	28	4	HDC00788	HDC00789
5 127.0	500	57	9	—	HDC00790
5 127.0	750	85	13	HDC00791	HDC00792
5 127.0	875	99	15	—	HDC00793
5 127.0	1000	113	18	HDC00794	HDC00795
5½ 136.5	800	84	13	HDC00796	HDC00797
5½ 139.7	350	36	6	—	HDC00798
5½ 139.7	800	81	13	HDC00799	HDC00800
5¾ 146.1	500	49	8	—	HDC00801
5¾ 146.1	1500	146	23	—	HDC00802
6 152.4	150	14	2	—	HDC00803
6 152.4	300	28	4	HDC00804	HDC00805
6 152.4	500	46	7	HDC00806	HDC00807
6 152.4	750	69	11	—	HDC00808
6 152.4	1000	93	14	HDC00809	HDC00810
6 152.4	1200	111	17	—	HDC00811
6 152.4	1500	139	22	HDC00812	HDC00813
6½ 165.1	350	30	5	HDC00814	HDC00815
6½ 165.1	500	42	7	HDC00816	HDC00817
6½ 165.1	900	76	12	—	HDC00818
6½ 165.1	1400	119	18	—	HDC00819
6¾ 171.5	500	41	6	—	HDC00820
6¾ 171.5	1000	81	13	—	HDC00821
7 177.8	500	39	6	HDC00822	HDC00823
7 177.8	750	59	9	—	HDC00824
7 177.8	1000	78	12	HDC00825	HDC00826
7 177.8	1500	118	18	—	HDC00827
7½ 190.5	325	24	4	HDC00828	—
7½ 190.5	1300	95	15	—	HDC00829
7¾ 196.9	400	28	4	—	HDC00830
7¾ 196.9	1000	70	11	—	HDC00831
8 203.2	400	27	4	—	HDC00832
8 203.2	500	34	5	HDC00833	HDC00834
8 203.2	750	51	8	—	HDC00835
8 203.2	850	58	9	—	HDC00836
8 203.2	1000	68	11	HDC00837	HDC00838
8 203.2	1200	81	13	HDC00839	HDC00840
8 203.2	1500	102	16	HDC00841	HDC00842
8 203.2	2000	136	21	—	HDC00843
8½ 215.9	875	56	9	—	HDC00844
8¾ 222.3	450	28	4	HDC00845	—
8¾ 222.3	1800	111	17	—	HDC00846
9 228.6	500	30	5	—	HDC00847
9 228.6	750	45	7	—	HDC00848
9 228.6	1000	60	9	—	HDC00849
9 228.6	1500	90	14	—	HDC00850
9½ 241.3	975	55	9	—	HDC00851
10 254.0	500	27	4	HDC00852	HDC00853
10 254.0	600	32	5	HDC00854	—
10 254.0	650	35	5	HDC00855	—
10 254.0	750	40	6	—	HDC00856
10 254.0	800	43	7	—	HDC00857
10 254.0	1000	54	8	HDC00858	HDC00859
10 254.0	1500	80	13	HDC00860	HDC00861
10 254.0	2000	107	17	—	HDC00862
11 279.4	1000	49	8	—	HDC00863



Type N Termination with leads **other** than 10" is available.  
 Please specify lead length at time of ordering, and a new Part Number will be issued.



**STOCK ITEMS**  
**ORDER NOW!**

**5/8" Diameter**

**SAME DAY SHIPMENT**  
**on stock items** **2 PM**  
**ORDERED BY** **CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
11 279.4	1400	68	11	—	HDC00864
11 279.4	2000	97	15	—	HDC00865
12 304.8	500	22	3	HDC00866	HDC00867
12 304.8	600	27	4	HDC00868	—
12 304.8	775	34	5	—	HDC00869
12 304.8	900	40	6	—	HDC00870
12 304.8	1000	44	7	HDC00871	HDC00872
12 304.8	1500	66	10	HDC00873	HDC00874
12 304.8	2000	89	14	—	HDC00875
13 330.2	1000	41	6	—	HDC00876
13 330.2	1500	61	10	—	HDC00877
14 355.6	925	35	5	HDC00878	—
14 355.6	1000	38	6	—	HDC00879
14 355.6	1500	57	9	—	HDC00880
14 355.6	3700	140	22	—	HDC00881
15 381.0	750	26	4	—	HDC00882
15 381.0	1000	35	5	—	HDC00883
15 381.0	2400	84	13	—	HDC00884
15 381.0	4000	140	22	—	HDC00885
16 406.4	1000	33	5	—	HDC00886

Sheath Length in (mm)	Watts	Watt Density		Part Number	
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
16 406.4	2500	82	13	—	HDC00887
16 406.4	4500	148	23	—	HDC00888
17 431.8	1000	31	5	—	HDC00889
18 457.2	900	26	4	—	HDC00890
18 457.2	1000	29	5	—	HDC00891
18 457.2	1500	44	7	—	HDC00892
18 457.2	3000	87	14	—	HDC00893
18 457.2	4700	137	21	—	HDC00894
19 482.6	1000	28	4	—	HDC00895
20 508.0	1000	26	4	—	HDC00896
20 508.0	1500	39	6	—	HDC00897
20 508.0	3500	91	14	—	HDC00898
20 508.0	4700	123	19	—	HDC00899
24 609.6	1000	22	3	—	HDC00900
24 609.6	2000	43	7	—	HDC00901
24 609.6	4700	102	16	—	HDC00902
25¼ 641.4	1500	31	5	—	HDC00903
30 762.0	2800	48	8	—	HDC00904
36 914.4	3000	43	7	—	HDC00905



Type N Termination with leads **other** than 10" is available. Please specify lead length at time of ordering, and a new Part Number will be issued.

### How to Order

#### Catalog Heaters

The Part Numbers listed are for Hi-Density Cartridge Heaters with Type N Termination, leads 10" long. For Type N Termination with leads other than 10" specify lead length at time of ordering, and a new Part Number will be issued.



#### Custom Engineered/Manufactured Heaters

For details on how to order Custom Manufactured Hi-Density Cartridge Heaters see page 2-17.

**Stock Hi-Density Cartridge Heaters can be Custom Terminated to ship within 24 to 48 hours through...**

#### The **TERMINATOR** Lead Conversion Program



For details see pages 2-18 and 2-19.



**STOCK ITEMS**  
**ORDER NOW!**

## 3/4" Diameter

**SAME DAY SHIPMENT**  
**on stock items**  
**ORDERED BY 2 PM CST**

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length in (mm)	Watts	Watt Density		Part Number		
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V	
2	50.8	200	57	9	HDC00906	—
2	50.8	800	226	35	—	HDC00907
2¼	57.2	200	49	8	HDC00908	—
2¼	57.2	800	194	30	—	HDC00909
3	76.2	250	42	7	HDC00910	—
3	76.2	500	85	13	HDC00911	HDC00912
3	76.2	600	102	16	HDC00913	HDC00914
3	76.2	1000	170	26	—	HDC00915
3½	88.9	250	35	6	HDC00916	HDC00917
3½	88.9	350	50	8	—	HDC00918
3½	88.9	500	71	11	HDC00919	—
3½	88.9	1000	141	22	—	HDC00920
3¾	95.3	250	33	5	HDC00921	—
3¾	95.3	500	65	10	—	HDC00922
3¾	95.3	1000	131	20	—	HDC00923
4	101.6	250	30	5	HDC00924	HDC00925
4	101.6	500	61	9	HDC00926	HDC00927
4	101.6	750	91	14	—	HDC00928
4	101.6	1000	121	19	HDC00929	HDC00930
4½	114.3	350	37	6	HDC00931	—
4½	114.3	875	93	14	HDC00932	HDC00933
4½	114.3	1400	149	23	—	HDC00934
4¾	120.7	750	75	12	—	HDC00935
5	127.0	300	28	4	HDC00936	HDC00937
5	127.0	500	47	7	—	HDC00938
5	127.0	750	71	11	—	HDC00939
5	127.0	1000	94	15	HDC00940	HDC00941
5	127.0	1200	113	18	—	HDC00942
5¾	146.1	1000	81	13	—	HDC00943
6	152.4	500	39	6	HDC00944	HDC00945
6	152.4	750	58	9	—	HDC00946
6	152.4	1000	77	12	HDC00947	HDC00948
6	152.4	1200	93	14	—	HDC00949
6	152.4	1500	116	18	—	HDC00950
6	152.4	2000	154	24	—	HDC00951
7	177.8	500	33	5	HDC00952	HDC00953
7	177.8	1000	65	10	HDC00954	HDC00955
7	177.8	1500	98	15	HDC00956	HDC00957
7	177.8	2000	131	20	—	HDC00958
7½	193.7	450	27	4	—	HDC00959
7¾	196.9	1350	79	12	—	HDC00960
8	203.2	350	20	3	—	HDC00961
8	203.2	500	28	4	HDC00962	HDC00963
8	203.2	700	40	6	—	HDC00964
8	203.2	1000	57	9	—	HDC00965
8	203.2	1350	76	12	—	HDC00966
8	203.2	2000	113	18	HDC00967	HDC00968
9	228.6	350	17	3	—	HDC00969
9	228.6	500	25	4	—	HDC00970
9	228.6	1200	60	9	—	HDC00971
9	228.6	1800	90	14	HDC00972	HDC00973
9¾	247.7	2000	92	14	—	HDC00974

Sheath Length in (mm)	Watts	Watt Density		Part Number		
		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V	
10	254.0	600	27	4	—	HDC00975
10	254.0	1000	45	7	—	HDC00976
10	254.0	1200	54	8	—	HDC00977
10	254.0	2000	89	14	HDC00978	HDC00979
10½	266.7	550	23	4	—	HDC00980
11	279.4	1000	40	6	—	HDC00981
11¼	298.5	1000	38	6	—	HDC00982
11¼	298.5	2000	75	12	—	HDC00983
12	304.8	800	30	5	—	HDC00984
12	304.8	1000	37	6	—	HDC00985
12	304.8	1200	44	7	—	HDC00986
12	304.8	1500	55	9	—	HDC00987
12	304.8	2000	74	11	HDC00988	HDC00989
12	304.8	2500	92	14	—	HDC00990
12	304.8	4000	148	23	—	HDC00991
13	330.2	1000	34	5	—	HDC00992
14	355.6	800	25	4	—	HDC00993
14	355.6	1000	31	5	—	HDC00994
14	355.6	1125	35	6	HDC00995	—
14	355.6	1250	39	6	—	HDC00996
14	355.6	1400	44	7	—	HDC00997
14	355.6	2500	79	12	—	HDC00998
14	355.6	4500	141	22	—	HDC00999
14¾	374.7	1500	45	7	—	HDC01000
15	381.0	1000	29	5	—	HDC01001
15	381.0	1500	44	7	—	HDC01002
16	406.4	1000	27	4	—	HDC01003
16	406.4	1175	32	5	HDC01004	—
16	406.4	1500	41	6	—	HDC01005
16	406.4	1800	49	8	—	HDC01006
16	406.4	3000	82	13	—	HDC01007
16	406.4	4700	129	20	—	HDC01008
17	431.8	1000	26	4	—	HDC01009
17¼	450.9	850	21	3	—	HDC01010
18	457.2	1000	24	4	—	HDC01011
18	457.2	1250	30	5	HDC01012	—
18	457.2	1450	35	6	—	HDC01013
18	457.2	2000	49	8	—	HDC01014
18	457.2	3250	79	12	—	HDC01015
18	457.2	5000	121	19	—	HDC01016
19	482.6	1000	23	4	—	HDC01017
20	508.0	1000	22	4	—	HDC01018
20	508.0	1150	25	4	—	HDC01019
20	508.0	2050	45	7	—	HDC01020
20	508.0	2250	49	8	—	HDC01021
20	508.0	5250	114	18	—	HDC01022
24	609.6	1000	18	3	—	HDC01023
24	609.6	1375	25	4	—	HDC01024
24	609.6	2000	36	6	—	HDC01025
24	609.6	2750	50	8	—	HDC01026
24	609.6	5500	99	15	—	HDC01027
36	914.4	2500	30	5	—	HDC01028



Type N Termination with leads **other** than 10" is available. Please specify lead length at time of ordering, and a new Part Number will be issued.





### 1" Diameter

Part Numbers Listed are for Hi-Density Cartridge Heaters with Type N Termination, 10" long leads.

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
3	76.2	750	101	16	—	HDC02662
3½	88.9	565	63	10	—	HDC02663
5	127.0	1000	73	11	—	HDC02664
7⅝	200.0	500	22	3	HDC02665	HDC02666
8	203.2	1500	65	10	—	HDC02667
8¾	222.3	875	34	5	—	HDC02668
11½	292.1	1000	29	5	HDC02669	—
13	330.2	1000	26	4	HDC02670	—
14	355.6	2700	64	10	—	HDC02671
15	381.0	1000	22	3	HDC02672	—

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
16	406.4	1800	37	6	—	HDC02673
17⅝	441.3	2400	46	7	—	HDC02674
20	508.0	1000	16	3	—	HDC02675
20	508.0	2800	46	7	—	HDC02676
25	635.0	1725	23	3	HDC02677	HDC02678
40	1016.0	4400	36	6	—	HDC02679
49	1244.6	3725	25	4	—	HDC02680
50½	1282.7	945	6	1	—	HDC02681
57	1447.8	2800	16	3	—	HDC02682
60	1524.0	1500	8	1	—	HDC02683



**Note:** 1" Hi-Density Cartridge Heaters are *not stocked*. **Standard lead time is 3 weeks.**

Type N Termination with leads *other* than 10" is available. Please specify lead length at time of ordering, and a new Part Number will be issued.

### How to Order

Added value  
is the key to



Lead Conversion  
Program

Custom  
Manufactured



#### The Terminator Lead Conversion Program

- Select a Hi-Density Cartridge Heater from pages 2-8 through 2-16.
- Identify the best suited lead termination (see pages 2-18 and 2-19) for your application. Refer to pages 2-31 through 2-47 for complete lead termination specifications.

**Note:** The Part Numbers listed are for Hi-Density Cartridge Heaters terminated with Type "N" Termination, 10" long leads.

- Specify: Diameter, Length, Watts, Volts, Termination Type(s) and Lengths if applicable for Leads, Wire Braid and Armor Cable.

**The Tempco Terminator Lead Conversion Program guarantees 24 to 48 hours shipping on custom terminated heaters.**

#### Custom Engineered/Manufactured Heaters (Standard lead time is 3 weeks.)

Understanding that an electric heater can be very application specific, for sizes, ratings and lead terminations not shown, **TEMPCO's** engineers will design and manufacture a Hi-Density Cartridge Heater to meet your requirements.

**Please specify the following:**

- Diameter
- Length
- Wattage
- Voltage
- Termination types (pages 2-31 through 2-47)
- Lead Length
- Cable/Braid length
- Special Features

For design specifications and application guidelines, see pages 2-4 through 2-7.

# The Terminator Advantage...

**Type R1** - Right-Angle Leads with Copper Elbow  
Page 2-36

**Type C2** - Right-Angle Armor Cable with Copper Elbow  
Page 2-36

**Type T2** - Screw Terminals  
Page 2-39

**Type S4** - Strain Relief Right Angled Leads  
Page 2-33

**Type MFR** - Mounting Flange (Round)  
Page 2-41



**Type S3** - Strain Relief Straight Leads  
Page 2-33

**Type MFH** - Mounting Flange (Hex)  
Page 2-41

**Type C1** - Straight Armor Cable  
Page 2-35

**Type LR** - Locating Ring  
Page 2-41

**Type P** - Quick Disconnect Plugs  
Page 2-43

**Type PS** - Pull Strap  
Page 2-41

**Type N** - Standard Leads  
Page 2-31

**Terminations on this page will ship within 24 hours**

Complete specifications are found on the page number listed with each termination type.

Look for this icon —

**Type B** - Ceramic Bead Insulation  
Page 2-43

Over **65,000**

Hi-Density Cartridge Heaters in more than


**1,000**

Standard Sizes and Electrical Ratings


**IN STOCK**

can be completed by **ADAPTING THE LEAD TERMINATION** best suited for your application.


**Type F** - Internally Connected Flexible Leads  
Page 2-31




**Type C3** - Right-Angle Armor Cable  
Page 2-37





**Type R3** - Angled Sheath Extension  
Page 2-38




**Type W1** - Right-Angle Wire Braided Leads  
Page 2-37




**Type R2** - Right-Angle Leads  
Page 2-37

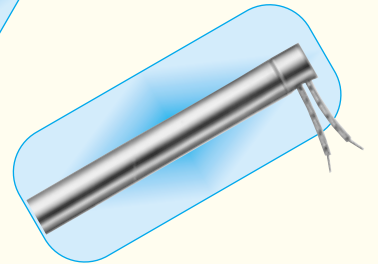


**Type W** - Straight Wire Braided Leads  
Page 2-34




**Type BF** - Bulkhead Fitting  
Page 2-40




**Type M2A** - Potted Lead End Seal (Cement only)  
Page 2-31




**Type CS** - Cable Brazed to Sheath  
Page 2-35




**Type CN** - Double Threaded Fitting  
Page 2-40



**Type E1** - General Purpose Box  
Page 2-42



**Type CM** - Single Threaded Fitting  
Page 2-40



**Type E3** - Explosion Resistant box  
Page 2-42

**Terminations on this page will ship within 48 hours**

Complete specifications are found on the page number listed with each termination type.

Look for this icon —





### Recommendations for improving the life of Tempco Hi-Density Metric Cartridge Heaters

**Tempco Hi-Density Metric Cartridge Heaters** have been widely used in many demanding and diverse applications during the past quarter century. The commonly used basic applications are platen, plastic mold and die heating, liquid immersion and air heating.



Selection of the wrong termination for the particular application is the major reason for all heater failures. However, failure to consider other important criteria can also have a negative effect on the life of the heater. To get the best performance and assure long life, it is important to carefully evaluate the following factors.

#### Operating Temperature

Operating temperature of a heater is a major factor in determining the life expectancy of a heating element. The heater life depends on the actual temperature of the resistance wire within the heater and not on the process operating temperature. The graph in Fig. 1 demonstrates the proper relationship between operating temperature and watt density; the higher the operating temperature the lower the maximum recommended watt density.

#### Heater Watt Density

Cartridge heater watt density is defined as the wattage dissipated per square inch of the heated sheath surface. For a particular application a heater's watt density governs internal resistance wire temperature, which determines the outer sheath temperature. These factors are critical to the proper heating of the application and to the life expectancy of the heater. Special construction features that promote excellent heat transfer permit Hi-Density cartridge heaters to operate at higher watt densities while maintaining the lowest possible resistance wire temperatures of any style cartridge heaters.

Heater watt density ( $w/cm^2$ ) is calculated using the following formula:

$$\text{Watt Density} = \frac{\text{Heater wattage}}{\text{Heated length} \times \text{Heater diameter} \times 3.1416}$$


Heated length is the overall length of the heater minus any unheated (cold) sections. Standard Type N, Hi-Density Metric Cartridge Heaters have 9.5 mm at the lead end and 6.4 mm at the disc end unheated. This would mean a 100 mm long heater would have 84.1 mm effective heated length. Unheated sections vary with type of heater termination. For descriptions of terminations and options, see pages 2-31 through 2-47.

The graph in Fig. 1 shows the maximum recommended watt density for Hi-Density Metric Cartridge Heaters when used in a steel platen. Watt density limitations for various materials are given in the engineering section of this catalog. For liquid immersion heaters the maximum watt density depends on the type of liquid being heated. The more viscous, or thicker the liquid, the lower the maximum watt density. Higher watt density can cause the liquid to carbonize and accumulate on the heater sheath, which will cause premature heater failure. It is advisable to use heaters that have watt densities below the maximum recommended watt density to get the longest heater life. If the actual heater watt density is close to the maximum recommended watt density, you can correct the problem by

1. Increasing the number, diameter and length of heaters.
2. Lowering the total wattage; however, this may increase the heat-up time.
3. Obtaining tighter fit (see Fig. 2 — Determining Fit).


A Hi-Density cartridge heater designed at the maximum recommended watt density allows the smallest heater to be used to obtain the required wattage with good service life. All things being equal, using a lower watt density heater will typically provide optimized service life.

**FIG. 1**  
**Recommended watt density for heating metal parts**

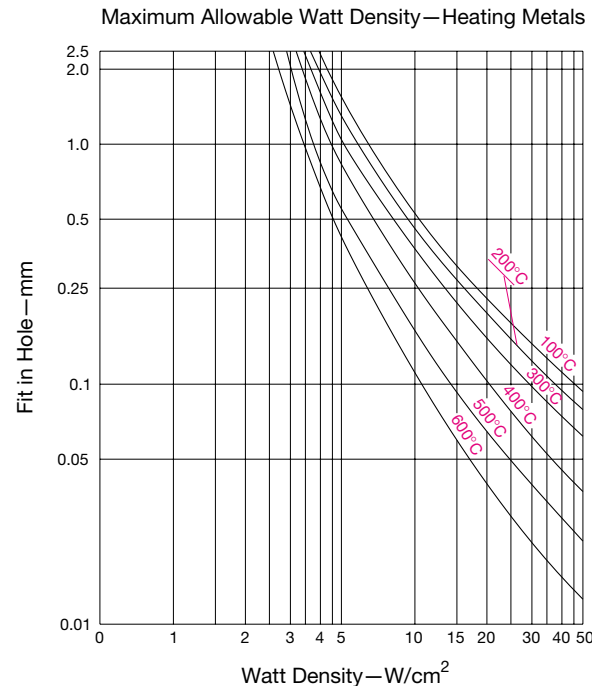

The graph shows the recommended maximum watt density for Tempco Hi-Density Metric Cartridge Heaters at different operating temperatures and fit, when the heater is installed in an oxidized mild steel block. The thermocouple is located 12.5 mm from the heater. When heating other materials, the data needs to be extrapolated based on the thermal conductivity of the material. Consult Tempco with your requirements.

**FIG. 2**  
**Determining Fit**

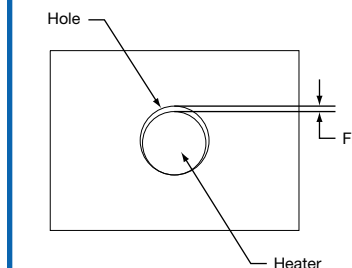

**Determining Fit** (see next page)



## Determining Fit

When heating a platen, mold, die or hot runner probe with Hi-Density Metric Cartridge Heaters inserted into drilled holes, fit is an important factor in determining the life expectancy of the heater. Fit is the difference between the minimum diameter of the cartridge heater and the maximum diameter of the hole. Unheated sections on a Hi-Density cartridge may be smaller in diameter due to swaging. To determine fit, use the smallest diameter only on the heated length.

**Example:** A 10 mm nominal OD Hi-Density cartridge heater has an actual diameter of  $9.93 \pm .5$  mm, which translates to a minimum diameter of 9.88 mm. If used in a  $10.0 \text{ mm} \pm .10$  mm hole, the fit would be .22 mm ( $10.10 \text{ mm} - 9.88 \text{ mm} = 0.22 \text{ mm}$ ).

When medium watt density heaters (less than 9.30 watts per square centimeter) are used in low temperature applications (less than  $600^\circ\text{F}$  [ $315^\circ\text{C}$ ]) general purpose drills are commonly used to drill holes. The typical hole size may be 0.07 mm to 0.20 mm over the drill size. For higher watt density and/or higher temperature applications, we recommend that the holes are drilled and reamed for the tightest possible fit. In applications where precise temperature control and heat transfer properties are required, Hi-Density cartridge heaters can be centerless ground to  $\pm 0.01$  mm.

Although a tighter fit is desirable to efficiently transfer heat and to get long heater life, a looser fit will aid in installing and removing heaters, especially long heaters. We recommend that you apply Tempco's BNS anti-seize cartridge heater coating as it will improve heat transfer and will make the removal of heaters easier.

The graph in Fig 1. shows the effect of fit in determining the maximum recommended watt density on a steel platen. As it is indicated in the graph the tighter the fit, the higher the maximum recommended watt density.

## Temperature Control and Location of Temperature Sensing Device

In order to better control the heater temperature and hence the resistance wire temperature, use of an appropriate temperature control and the proximity of the heater to the sensor is very important. The graph in Fig 1. shows the effect of operating temperature in determining the maximum recommended watt density on a steel platen where the sensor is located 12.5 mm from the heater. Higher watt density heaters can generate heat faster than the surrounding area's ability to dissipate heat. This creates a thermal lag between the heater and the sensor. The closer the sensor to the heater, the better you can control the heater temperature. By keeping the sensor further from the heater, temperature gradients of several hundred degrees can be observed in many applications, especially during initial start-up and heavy thermal cycling. Although the set operating temperature may be low, the heater may be running at a very high temperature. This is a common cause of heater failure. This can be minimized using time proportional and PID functions of the temperature controllers. See Section 13 for temperature controllers and Section 14 for thermocouples and sensors.

## Power Control

Power control methods affect the life expectancy of heating elements. In general, although economical, on-off controls increase thermal fatigue and oxidation rate on heating elements by causing wide temperature swings of the internal heating element. Silicone controlled rectifiers (SCR's), Mercury Relays and solid state power controls can increase the life expectancy of heating elements by reducing the temperature swings of the internal heating element. See Section 13 for power controls.

## Important Installation Considerations

1. For closest fit and best heat transfer, use reamed holes.
2. When possible, drill holes through the object being heated. This will make heater removal easier.
3. When using an anti-seize coating like Tempco's BNS spray or paste, do not apply over lead wires or any other current carrying conductors.
4. When using insulated tape or sleeving, check to make sure it is rated for the temperature of the application. Lower temperature rated materials can contain an adhesive or binder that can carbonize and become electrically conductive.
5. When using heaters near their maximum recommended watt density, it is recommended the temperature sensing probes be approximately 12.5 mm from the heater sheath.
6. Lead wires should not be located in the hole containing the cartridge heater during operation. This may cause the lead wires to be exposed to temperatures above their rated temperature.
7. When used in a vacuum application, make sure the lead end of the heater is outside the vacuum. If the lead has to be in the vacuum, consult Tempco for specific recommendations.
8. Many applications will subject a heater's electrical terminations to one or more of the following potentially damaging conditions:
  - Moisture
  - Oil and other contaminants
  - Flexing
  - Abrasion
  - High temperature

**Note:** To protect the heater from damage in these harsh environments, Tempco has a wide selection of terminations and options available. See pages 2-31 through 2-47 for details.

## CALCULATING WATTAGE REQUIREMENTS

×  
+  
±  
≥  
≤  
—  
+  
≡  
=  
>  
<

**Formulas and related data** to calculate wattage requirements are detailed in the Engineering Section located in the back of this catalog. For new applications it is recommended that testing under actual operating conditions be performed to confirm wattage and watt density calculations.

An excellent evaluation method is to power up a heater with the calculated wattage and watt density through a variable voltage transformer. By changing the voltage and therefore the heater output, thermocouples sensing heater and process temperature can verify the design.



### 6.5mm Diameter Hi-Density Cartridge Heaters

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
40	50	9	HDM00001
40	75	13	HDM00002
40	100	18	HDM00003
40	125	22	HDM00004
40	150	27	HDM00005
60	50	5	HDM00006
60	100	10	HDM00007
60	150	15	HDM00008
60	200	21	HDM00009
60	250	26	HDM00010

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
80	100	7	HDM00011
80	150	11	HDM00012
80	200	15	HDM00013
80	300	22	HDM00014
80	400	29	HDM00015
100	100	6	HDM00016
100	200	11	HDM00017
100	300	17	HDM00018
100	400	22	HDM00019
100	500	28	HDM00020
130	100	4	HDM00021
130	250	10	HDM00022
130	400	17	HDM00023
130	500	21	HDM00024
130	600	25	HDM00025

### 8mm Diameter Hi-Density Cartridge Heaters

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
40	50	7	HDM00026
40	75	11	HDM00027
40	100	14	HDM00028
40	150	22	HDM00029
40	200	29	HDM00030
60	75	6	HDM00031
60	150	13	HDM00032
60	200	17	HDM00033
60	250	21	HDM00034
60	300	25	HDM00035
80	100	6	HDM00036
80	200	12	HDM00037
80	300	18	HDM00038
80	400	24	HDM00039
80	500	29	HDM00040
100	100	5	HDM00041
100	250	11	HDM00042
100	400	18	HDM00043
100	500	23	HDM00044
100	600	27	HDM00045

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
130	200	7	HDM00046
130	350	12	HDM00047
130	500	17	HDM00048
130	600	20	HDM00049
130	700	24	HDM00050
160	200	5	HDM00051
160	400	11	HDM00052
160	600	16	HDM00053
160	700	19	HDM00054
160	900	24	HDM00055
200	300	6	HDM00056
200	500	11	HDM00057
200	700	15	HDM00058
200	900	19	HDM00059



Part Numbers above are for Cartridge Heaters terminated with Type "N" leads, 250 mm long. See pages 2-31 through 2-47 for other terminations.



## 10mm Diameter Hi-Density Cartridge Heaters

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
40	50	6	HDM00060
40	100	12	HDM00061
40	150	17	HDM00062
40	200	23	HDM00063
40	250	29	HDM00064
60	100	7	HDM00065
60	150	10	HDM00066
60	200	13	HDM00067
60	300	20	HDM00068
60	400	27	HDM00069
80	100	5	HDM00070
80	200	9	HDM00071
80	300	14	HDM00072
80	400	19	HDM00073
80	600	28	HDM00074
100	200	7	HDM00075
100	300	11	HDM00076
100	400	15	HDM00077
100	500	18	HDM00078
100	700	25	HDM00079
130	200	5	HDM00080
130	400	11	HDM00081
130	600	16	HDM00082

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
130	800	22	HDM00083
130	1000	27	HDM00084
160	200	4	HDM00085
160	500	11	HDM00086
160	800	17	HDM00087
160	1000	22	HDM00088
160	1200	26	HDM00089
200	300	5	HDM00090
200	600	10	HDM00091
200	1000	17	HDM00092
200	1200	20	HDM00093
200	1400	24	HDM00094
250	400	5	HDM00095
250	700	9	HDM00096
250	1000	13	HDM00097
250	1400	20	HDM00098
300	500	6	HDM00099
300	1000	11	HDM00100
300	1500	17	HDM00101

## 12.5mm Diameter Hi-Density Cartridge Heaters

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
60	100	6	HDM00102
60	200	12	HDM00103
60	300	17	HDM00104
60	400	23	HDM00105
60	500	29	HDM00106
80	150	6	HDM00107
80	300	12	HDM00108
80	400	16	HDM00109
80	500	20	HDM00110
80	700	28	HDM00111
100	200	6	HDM00112
100	400	12	HDM00113
100	600	18	HDM00114
100	800	24	HDM00115
100	1000	30	HDM00116
130	250	6	HDM00117

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
130	500	11	HDM00118
130	800	18	HDM00119
130	1000	22	HDM00120
130	1400	31	HDM00121
160	300	5	HDM00122
160	600	11	HDM00123
160	1000	18	HDM00124
160	1400	25	HDM00125
160	1700	30	HDM00126
200	400	6	HDM00127
200	700	10	HDM00128
200	1000	14	HDM00129
200	1500	21	HDM00130
200	2000	28	HDM00131
250	500	5	HDM00132
250	1000	11	HDM00133
250	1500	16	HDM00134
250	2000	22	HDM00135
300	600	5	HDM00136
300	1500	13	HDM00137
300	2000	18	HDM00138



Part Numbers above are for Cartridge Heaters terminated with Type "N" leads, 250 mm long. See pages 2-31 through 2-47 for other terminations.





### 16mm Diameter Hi-Density Cartridge Heaters

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
60	100	5	HDM00139
60	300	14	HDM00140
60	400	18	HDM00141
60	500	23	HDM00142
60	700	32	HDM00143
80	200	6	HDM00144
80	400	12	HDM00145
80	600	19	HDM00146
80	800	25	HDM00147
80	1000	31	HDM00148
100	300	7	HDM00149
100	500	12	HDM00150
100	700	17	HDM00151
100	1000	24	HDM00152
100	1300	31	HDM00153
130	400	7	HDM00154

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
130	600	10	HDM00155
130	800	14	HDM00156
130	1200	21	HDM00157
130	1600	28	HDM00158
160	500	7	HDM00159
160	700	10	HDM00160
160	1000	14	HDM00161
160	1500	21	HDM00162
160	2000	28	HDM00163
200	600	6	HDM00164
200	1000	11	HDM00165
200	1500	16	HDM00166
200	2000	22	HDM00167
250	700	6	HDM00168
250	1500	13	HDM00169
250	2000	17	HDM00170
300	1000	7	HDM00171
300	1500	11	HDM00172
300	2000	14	HDM00173

### 20mm Diameter Hi-Density Cartridge Heaters

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
60	250	8	HDM00174
60	400	13	HDM00175
60	300	10	HDM00176
60	500	17	HDM00177
80	500	12	HDM00178
80	800	19	HDM00179
100	650	12	HDM00180
100	1000	18	HDM00181
130	300	4	HDM00182
130	800	11	HDM00183
130	1250	17	HDM00184
160	800	9	HDM00185

Sheath Length (mm)	Watts	Watt Density (W/cm <sup>2</sup> )	Part Number 220V
160	1000	11	HDM00186
160	1250	13	HDM00187
200	1000	8	HDM00188
200	1200	10	HDM00189
200	1600	14	HDM00190
250	1250	8	HDM00191
250	1750	12	HDM00192
250	2000	13	HDM00193
300	1600	9	HDM00194
300	2200	12	HDM00195



Part Numbers above are for Cartridge Heaters terminated with Type "N" leads, 250 mm long. See Pages 2-31 through 2-47 for other Terminations.

### How to Order

#### Catalog Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List on the preceding pages. Note that Part Numbers shown are for heaters with Type "N" Termination (250 mm leads).

Available Terminations and Optional Features can be found on pages 2-31 through 2-47.

#### Custom Engineered/Manufactured Heaters


Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Hi-Density Metric Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

**Please Specify** the following:

- Diameter
- Length
- Wattage
- Voltage
- Termination types (see pages 2-31 through 2-47)
- Lead Length
- Cable/Braid length
- Special Features



# LOW DENSITY CARTRIDGE HEATER FEATURES

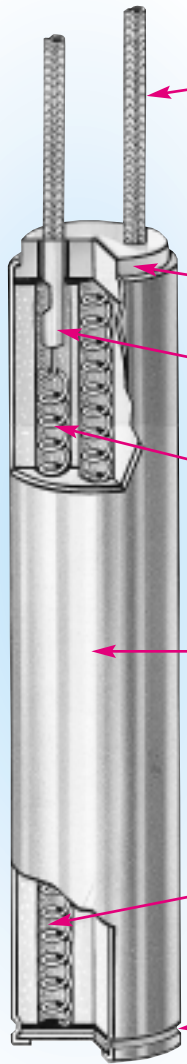

- A** The standard termination for Low Density Cartridge Heaters is Type "F", consisting of 10" (254 mm) internally connected flexible stranded nickel wire leads with high temperature fiberglass/Teflon® tape insulation, UL approved for 300 Volt or 600 Volt service, rated at a continuous operating temperature of 482°F (250°C). To meet the requirements of your application we offer over 40 standard termination styles to select from that will solve many of the most common application problems. See pages 2-31 through 2-43.
- B** Ceramic end cap protects the cartridge internally from outside contamination.
- C** Resistance wire and lead wires are mechanically spliced with heavy wall nickel connectors for a positive electrical connection.
- D** Helically wound Nickel-Chrome resistance wire is evenly stretched and strung through ceramic insulators.
- E** Alloy 304 Stainless Steel is used to provide high temperature strength, good thermal conductivity and resistance to oxidation up to 1200°F (650°C). Alloy 304 is a Nickel-Chromium Stainless Steel. For immersion heating of corrosive solutions other sheath materials are available, consult Tempco.
- F** Specially selected grain size high purity Magnesium Oxide (MgO) is used to fill all remaining space inside the ceramic insulator thus increasing thermal conductivity, dielectric strength and heater life.
- G** Sheath is roll crimped over a 304 Stainless Steel end disc. A mica spacer electrically insulates the heater core from the end disc. This style end seal is not moisture proof.



**Low Density Cartridge Heaters** are UL recognized and CSA certified in many design variations. Tempco's UL file number is E65652 and CSA file number is LR43099-4. If you require a UL Recognized or CSA Certified heater, please specify.



## Typical Applications

- Heat Sealing Equipment
- Laminating Equipment
- Packaging Equipment
- Labeling Machines
- Molds and Dies
- Food Processing
- Refrigeration
- Shoe Machinery
- Glue Guns
- Wax Pots
- Heating Liquids
- Heating Gases



**Standard Specifications and Tolerances** of Low Density Cartridge Heaters.  
If tighter tolerances are required consult Tempco.

### PERFORMANCE RATINGS

**Maximum Temperature:** 1200°F (650°C)

**Maximum Watt Density:** 30-45 W/in<sup>2</sup> (4.6-7.0 W/cm<sup>2</sup>) depending on heater size and operating temperature.

### DIMENSIONAL SPECIFICATIONS

Nominal Diameter	3/16	1/4	3/8	1/2	5/8	3/4	7/8	15/16	1	1 1/4
Actual Diameter- in.	.185	.247	.372	.496	.621	.745	.870	.933	.995	1.245
Actual Diameter- (mm)	(4.70)	(6.27)	(9.45)	(12.60)	(15.77)	(18.92)	(22.10)	(23.70)	(25.27)	(31.62)
Diameter Tolerance	±.002 (.051 mm)									
Length Tolerance	±1/16 (1.59 mm) up to 6" (152.4 mm) long; ±2% over 6" long									
Camber Tolerance	.010" (.254 mm) per foot of length									

### ELECTRICAL SPECIFICATIONS

Nominal Diameter	3/16	1/4	3/8	1/2	5/8	3/4	7/8	15/16	1	1 1/4
Maximum Voltage	240	240	240	240	480*	480*	480*	480*	480*	480*
Maximum Amperage	1.5	3.5	6	10	10	15	15	15	25	30
Maximum Wattage	Consult Tempco									
Wattage Tolerance	Plus 5%, Minus 10%									
Resistance Tolerance	Plus 10%, Minus 5%									

\*480V when applicable. Consult Tempco.

#### Standard 3/16" Diameter – Actual .185" (4.70 mm)

Sheath Length	in (mm)	Watts	Watt Density		Part Number	
			W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V
1	25.4	15	34	5.3	LDC00001	—
1 1/2	38.1	20	30	4.7	LDC00002	—
2	50.8	30	31	4.9	LDC00003	—
2 1/2	63.5	40	32	5.0	LDC00004	—
3	76.2	45	29	4.5	LDC00005	—
4	101.6	65	31	4.7	LDC00006	—
5	127	80	29	4.6	LDC00007	—
6	152.4	100	30	4.7	LDC00008	—
7	177.8	125	32	5.0	LDC00009	—
8	203.2	150	33	5.2	LDC00010	—
10	254	170	30	4.7	LDC00011	—

#### Standard 1/4" Diameter – Actual .247" (6.27 mm)

Sheath Length	in (mm)	Watts	Watt Density		Part Number	
			W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V
1	25.4	20	34	5.3	LDC00012	—
1	25.4	42	71	11.1	LDC00013	—
1 1/2	38.1	20	23	3.5	LDC00014	—
2	50.8	32	27	4.2	LDC00015	—
2	50.8	40	34	5.3	LDC00016	—
2	50.8	50	42	6.6	LDC00017	—
2 1/2	63.5	30	19	3.0	LDC00018	—
3	76.2	32	16	2.5	LDC00019	—
3	76.2	50	25	3.9	LDC00020	—
3 1/2	88.9	80	34	5.3	LDC00021	—
4	101.6	100	36	5.6	LDC00022	LDC00023
5	127	125	35	5.5	LDC00024	—
6	152.4	150	35	5.4	LDC00025	LDC00026
7	177.8	100	20	3.0	LDC00027	LDC00028
8	203.2	200	34	5.3	LDC00029	LDC00030
10	254	250	34	5.2	LDC00031	LDC00032



Part Numbers above are for Low Density Cartridge Heaters terminated with Type "F" leads, 10" long.  
See pages 2-31 through 2-47 for other terminations.



**Standard 3/8" Diameter – Actual .372" (9.45 mm)**

Sheath Length in (mm)	Watts	Watt Density		Part Number		
		W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V	
1½	38.1	15	13	2.0	LDC00033	—
1½	38.1	40	34	5.3	LDC00034	—
2	50.8	50	28	4.4	LDC00035	—
2½	63.5	75	32	4.9	LDC00036	—
2½	63.5	100	42	6.6	LDC00037	—
3	76.2	100	34	5.3	LDC00038	—
3½	88.9	120	34	5.3	LDC00039	LDC00040
4	101.6	75	18	2.8	LDC00041	LDC00042
4	101.6	130	32	4.9	LDC00043	LDC00044
4	101.6	150	36	5.6	LDC00045	LDC00046
4	101.6	180	44	6.8	LDC00047	LDC00048
4½	114.3	75	16	2.5	LDC00049	LDC00050
4½	114.3	150	32	4.9	LDC00051	LDC00052
5	127	150	28	4.4	LDC00053	LDC00054
5	127	200	38	5.8	LDC00055	LDC00056
5½	139.7	200	34	5.3	LDC00057	LDC00058
6	152.4	225	35	5.4	LDC00059	LDC00060
6	152.4	250	39	6.0	LDC00061	LDC00062
7	177.8	200	26	4.0	LDC00063	LDC00064
7	177.8	265	35	5.4	LDC00065	LDC00066
8	203.2	300	34	5.3	LDC00067	LDC00068
9	228.6	350	35	5.4	LDC00069	LDC00070
9½	241.3	300	28	4.4	LDC00071	LDC00072
10	254	375	34	5.2	LDC00073	LDC00074
12	304.8	425	31	4.9	LDC00075	LDC00076
12	304.8	450	33	5.1	LDC00077	LDC00078
12	304.8	475	35	5.4	LDC00079	LDC00080
12	304.8	500	37	5.7	LDC00081	LDC00082
14	355.6	500	31	4.9	LDC00083	LDC00084
16	406.4	550	30	4.7	LDC00085	LDC00086
20	508	200	9	1.3	LDC00087	LDC00088
20	508	650	28	4.4	LDC00089	LDC00090
22	558.8	800	32	4.9	—	LDC00091
24	609.6	750	27	4.2	—	LDC00092

**Standard 1/2" Diameter – Actual .496" (12.60 mm)**

Sheath Length in (mm)	Watts	Watt Density		Part Number		
		W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V	
1½	38.1	60	38	5.9	LDC00093	—
2	50.8	75	32	4.9	LDC00094	—
2½	63.5	40	13	2.0	LDC00095	—
2½	63.5	125	40	6.2	LDC00096	—
3	76.2	150	38	5.9	LDC00097	LDC00098
3½	88.9	150	32	4.9	LDC00099	LDC00100
3¾	98.4	90	17	2.6	LDC00101	LDC00102
4	101.6	180	33	5.1	LDC00103	LDC00104
4½	114.3	200	32	4.9	LDC00105	—
5	127	200	28	4.4	LDC00106	LDC00107
5½	139.7	300	38	5.9	LDC00108	LDC00109
6	152.4	150	17	2.7	LDC00110	LDC00111
6	152.4	250	29	4.5	LDC00112	LDC00113
6	152.4	300	35	5.4	LDC00114	LDC00115
6½	165.1	300	32	4.9	LDC00116	LDC00117
7	177.8	275	27	4.2	LDC00118	LDC00119
7	177.8	350	34	5.3	LDC00120	LDC00121
7½	190.5	350	32	4.9	LDC00122	LDC00123
8	203.2	400	34	5.3	LDC00124	LDC00125
8	203.2	425	36	5.6	LDC00126	LDC00127
8½	215.9	400	32	4.9	LDC00128	LDC00129
9	228.6	450	34	5.2	LDC00130	LDC00131
10	254	500	34	5.2	LDC00132	LDC00133
10½	266.7	500	32	4.9	LDC00134	LDC00135
11	279.4	550	33	5.2	LDC00136	LDC00137
12	304.8	500	28	4.3	LDC00138	LDC00139
12	304.8	600	33	5.1	LDC00140	LDC00141
14	355.6	600	28	4.4	LDC00142	LDC00143
15	381	650	29	4.4	LDC00144	LDC00145
15	381	750	33	5.1	LDC00146	LDC00147
16	406.4	500	21	3.2	LDC00148	LDC00149
16	406.4	675	28	4.3	LDC00150	LDC00151
18	457.2	725	26	4.1	LDC00152	LDC00153
18	457.2	800	29	4.5	—	LDC00154
20	508	750	24	3.8	LDC00155	LDC00156
21	533.4	750	23	3.6	LDC00157	LDC00158
24	609.6	500	14	2.1	LDC00159	LDC00160
24	609.6	1000	27	4.2	—	LDC00161
25	635	1100	29	4.4	—	LDC00162



Part Numbers above are for Low Density Cartridge Heaters terminated with Type "F" leads, 10" long.  
See pages 2-31 through 2-47 for other terminations.



### Standard 5/8" Diameter – Actual .621" (15.77 mm)

### Standard 3/4" Diameter – Actual .745" (18.92 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V
1½	38.1	100	51	7.9	LDC00163	LDC00164
2	50.8	100	34	5.3	LDC00165	LDC00166
2½	63.5	80	20	3.2	LDC00167	LDC00168
2½	63.5	150	38	5.9	LDC00169	LDC00170
3	76.2	175	36	5.5	LDC00171	LDC00172
3½	88.9	190	32	5.0	LDC00173	LDC00174
4	101.6	200	29	4.5	LDC00175	LDC00176
4½	114.3	240	31	4.7	LDC00177	LDC00178
4½	114.3	275	35	5.4	LDC00179	LDC00180
5	127	200	23	3.5	LDC00181	LDC00182
5	127	250	28	4.4	LDC00183	LDC00184
5	127	375	42	6.6	LDC00185	LDC00186
5½	139.7	200	20	3.2	LDC00187	LDC00188
5½	139.7	285	29	4.5	LDC00189	LDC00190
5½	139.7	510	52	8.1	LDC00191	—
5½	149.2	350	33	5.1	LDC00192	LDC00193
6	152.4	200	19	2.9	LDC00194	LDC00195
6	152.4	300	28	4.3	LDC00196	LDC00197
6	152.4	350	32	5.0	LDC00198	LDC00199
6½	165.1	350	30	4.6	LDC00200	LDC00201
7	177.8	375	29	4.6	LDC00202	LDC00203
8	203.2	400	27	4.2	LDC00204	LDC00205
8½	215.9	425	27	4.2	LDC00206	LDC00207
9	228.6	450	27	4.2	LDC00208	LDC00209
9½	241.3	475	27	4.2	LDC00210	LDC00211
10	254	500	27	4.2	LDC00212	LDC00213
11	279.4	550	27	4.1	LDC00214	LDC00215
12	304.8	250	11	1.7	LDC00216	LDC00217
12	304.8	500	22	3.4	LDC00218	LDC00219
12	304.8	600	27	4.1	LDC00220	LDC00221
12	304.8	700	31	4.8	LDC00222	LDC00223
12½	314.3	450	19	3.0	LDC00224	LDC00225
14	355.6	700	26	4.1	LDC00226	LDC00227
15	381	750	26	4.1	LDC00228	LDC00229
16	406.4	800	26	4.1	LDC00230	LDC00231
17	431.8	1000	31	4.8	LDC00232	LDC00233
18	457.2	725	21	3.3	LDC00234	LDC00235
18	457.2	800	23	3.6	LDC00236	LDC00237
20	508	900	24	3.6	LDC00238	LDC00239
21	533.4	1000	25	3.9	—	LDC00240
22	558.8	2000	47	7.3	—	LDC00241
24	609.6	2000	43	6.7	—	LDC00242
25	635	768	16	2.5	LDC00243	—
25	635	1100	23	3.5	—	LDC00244
25	635	1500	31	4.8	LDC00245	LDC00246
27	685.8	1200	23	3.6	LDC00247	—
28	711.2	2000	37	5.7	—	LDC00248
30	762	2000	35	5.4	—	LDC00249
31	787.4	2000	33	5.2	—	LDC00250
34	863.6	2000	30	4.7	—	LDC00251
36	914.4	2000	29	4.4	—	LDC00252
38	965.2	2000	27	4.2	—	LDC00253
38½	979.5	1200	16	2.5	LDC00254	—

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V
3	76.2	225	38	5.9	LDC00255	LDC00256
3½	88.9	225	32	4.9	LDC00257	LDC00258
3½	88.9	250	35	5.5	LDC00259	LDC00260
4	101.6	300	36	5.6	LDC00261	LDC00262
5	127	350	33	5.1	LDC00263	LDC00264
6	152.4	170	13	2.0	LDC00265	LDC00266
6	152.4	350	27	4.2	LDC00267	LDC00268
6	152.4	400	31	4.8	LDC00269	LDC00270
7	177.8	350	23	3.5	LDC00271	LDC00272
7	177.8	450	29	4.6	LDC00273	LDC00274
7	177.8	535	35	5.4	LDC00275	LDC00276
8	203.2	350	20	3.1	LDC00277	LDC00278
8	203.2	500	28	4.4	LDC00279	LDC00280
8	203.2	600	34	5.3	LDC00281	LDC00282
8½	215.9	675	36	5.6	LDC00283	LDC00284
9	228.6	350	17	2.7	LDC00285	LDC00286
9	228.6	550	27	4.3	LDC00287	LDC00288
9½	241.3	575	27	4.2	LDC00289	LDC00290
10	254	600	27	4.2	LDC00291	LDC00292
10	254	800	36	5.5	LDC00293	LDC00294
11	279.4	675	27	4.2	LDC00295	LDC00296
12	304.8	750	28	4.3	LDC00297	LDC00298
12	304.8	1000	37	5.7	LDC00299	LDC00300
13½	342.9	600	20	3.0	LDC00301	LDC00302
14	355.6	1000	31	4.9	LDC00303	LDC00304
16	406.4	950	26	4.0	LDC00305	LDC00306
18	457.2	950	23	3.6	LDC00307	LDC00308
18	457.2	1100	27	4.1	—	LDC00309
20	508	1000	22	3.4	LDC00310	LDC00311
21	533.4	1150	24	3.7	LDC00312	LDC00313
30	762	1800	26	4.0	—	LDC00314
31	787.4	1800	25	3.9	—	LDC00315



Part Numbers above are for Low Density Cartridge Heaters terminated with Type "F" leads, 10" long. See pages 2-31 through 2-47 for other terminations.



## Low Density

### Standard 7/8" Diameter – Actual .870" (22.10 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V
3½	88.9	250	30	4.7	LDC00316	LDC00317
4	101.6	300	31	4.8	LDC00318	LDC00319
5	127	400	32	5.0	LDC00320	LDC00321
6	152.4	475	31	4.9	LDC00322	LDC00323
7	177.8	525	29	4.6	LDC00324	LDC00325
8	203.2	550	27	4.1	LDC00326	LDC00327
10	254	600	23	3.6	LDC00328	LDC00329
11	279.4	600	21	3.2	LDC00330	LDC00331
11	279.4	700	24	3.8	LDC00332	LDC00333
12	304.8	850	27	4.2	LDC00334	LDC00335
13	330.2	900	26	4.1	LDC00336	LDC00337
15	381	950	24	3.7	LDC00338	LDC00339
18	457.2	1000	21	3.2	LDC00340	LDC00341
21½	546.1	1000	17	2.7	—	LDC00342

### Standard 1" Diameter – Actual .995" (25.27 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V
3	76.2	250	32	4.9	LDC00373	LDC00374
4	101.6	300	27	4.2	LDC00375	LDC00376
5	127	375	27	4.1	LDC00377	LDC00378
6	152.4	500	29	4.5	LDC00379	LDC00380
8	203.2	600	25	3.9	LDC00381	LDC00382
9	228.6	700	26	4.1	LDC00383	LDC00384
10	254	800	27	4.2	LDC00385	LDC00386
10¼	273.1	600	19	2.9	LDC00387	LDC00388
10¼	273.1	850	26	4.1	LDC00389	LDC00390
12	304.8	1000	28	4.3	LDC00391	LDC00392
14	355.6	1100	26	4.0	LDC00393	LDC00394
18	457.2	1250	23	3.5	LDC00395	LDC00396
22¼	565.2	1000	15	2.3	LDC00397	LDC00398
23	584.2	1000	14	2.2	LDC00399	LDC00400
23½	596.9	1500	21	3.2	—	LDC00401
24	609.6	1500	20	3.1	—	LDC00402

### Standard 15/16" Diameter – Actual .933" (23.70 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V
3	76.2	275	37	5.8	LDC00343	LDC00344
4	101.6	325	32	4.9	LDC00345	LDC00346
5	127	140	11	1.6	LDC00347	LDC00348
5	127	400	30	4.7	LDC00349	LDC00350
6	152.4	450	28	4.3	LDC00351	LDC00352
7	177.8	450	24	3.6	LDC00353	LDC00354
7½	187.3	270	13	2.1	LDC00355	LDC00356
8	203.2	500	23	3.5	LDC00357	LDC00358
8½	215.9	500	21	3.3	LDC00359	LDC00360
10	254	600	21	3.3	LDC00361	LDC00362
11	279.4	625	20	3.1	LDC00363	LDC00364
12	304.8	700	21	3.2	LDC00365	LDC00366
15	381	850	20	3.1	LDC00367	LDC00368
18	457.2	1000	19	3.0	LDC00369	LDC00370
24	609.6	1400	20	3.1	LDC00371	LDC00372

### Standard 1-1/4" Diameter – Actual 1.245" (31.62 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	(mm)		W/in <sup>2</sup>	(W/cm <sup>2</sup> )	120V	240V
3¼	82.6	400	37	5.7	LDC00403	LDC00404
5	127	450	25	3.9	LDC00405	LDC00406
6	152.4	500	23	3.6	LDC00407	LDC00408
6	152.4	800	37	5.7	LDC00409	LDC00410
7	177.8	550	22	3.3	LDC00411	LDC00412
7	177.8	1000	39	6.1	LDC00413	LDC00414
9	228.6	675	20	3.1	LDC00415	LDC00416
10	254	1000	27	4.2	LDC00417	LDC00418
12	304.8	1000	22	3.4	LDC00419	LDC00420
14	355.6	2000	38	5.8	—	LDC00421
15	381	1250	22	3.4	—	LDC00422
16½	419.1	1000	16	2.5	LDC00423	LDC00424
22½	571.5	2200	25	3.9	—	LDC00425
24	609.6	2400	26	4.0	—	LDC00426



Part Numbers above are for Low Density Cartridge Heaters terminated with Type "F" leads, 10" long. See pages 2-31 through 2-47 for other terminations.

### How to Order

#### Catalog Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List on the preceding pages. Note that Part Numbers shown are for heaters with Type "F" Termination (10" leads). Available Terminations and Optional Features can be found on pages 2-31 through 2-47.

#### Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Low Density Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

**Please Specify** the following:

- Diameter
- Length
- Wattage
- Voltage
- Termination types
- Lead Length
- Cable/Braid length
- Special Features



### Type N External Pins with Leads

**Available on HDC and HDM cartridge heaters.**

Flexible stranded nickel lead wires have fiberglass insulation and are UL approved for 600 volt or 300 volt service. The leads are connected to 1/4" (32 mm) long solid nickel conductors. Fiberglass sleeving insulates the pin/lead wire connection.

- Standard termination style for HDC and HDM cartridge heaters.
- A nominal 3/8" cold section at the lead end is required.
- Standard 10" (254 mm) leads. Specify longer leads.




### Type F Internally Connected Flexible Leads

**Available on HDC, HDM and LDC cartridge heaters.**

This lead termination provides flexibility because the lead wires are internally connected to the terminal pins. The lead wires can be sharply bent as they exit the ceramic insulating cap without exposing the bare wire or breaking the solid terminal pins.

- Standard termination type for LDC cartridge heaters.
- Minimum 3/8" up to 1" cold section at the lead end is required. Temperature at the lead end is not to exceed 482°F (250°C). For higher temperature applications special lead wires can be used. Consult Tempco with your requirements.
- Standard 10" (254 mm) leads. Specify longer leads.

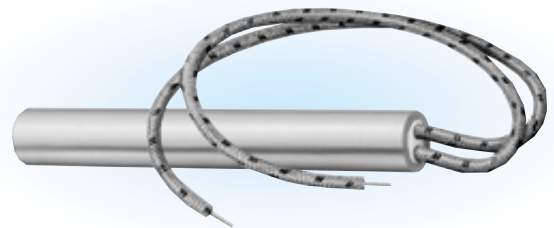

## Moisture Resistant Terminations

### Type M1\_\_ Polyolefin Liquid Barrier

**Available on HDC, HDM, and LDC cartridge heaters.**

A liquid barrier used for low temperature applications in primarily refrigeration or food service applications. The seal bonds to both the heater and the leads.

**M1A** Teflon® insulated lead wires.

**M1B** Three conductor SJO type cord.

- A minimum of 1 1/2" of cold section at the lead end is required. Temperature at the lead end is not to exceed 220°F (105°C).
- Standard 10" (254 mm) leads. Specify longer leads.



### Type M2\_\_ Potted End Seal

**Available on HDC, HDM and LDC cartridge heaters.**

Potted end seals help to protect the heater from moisture or contamination from plastic material, cleaning solvents, or oils. The bottom end disc seal is welded in.



**M2A** Cement potting with silicone varnish. 1000°F (538°C). Fiberglass lead wires externally connected.

**M2B** Silicone rubber potting. 450°F (232°C). Silicone rubber lead wires internally connected.

**M2C** High temperature epoxy potting. 450°F (232°C). Teflon® lead wires internally connected.

**M2D** Low temperature epoxy potting. 266°F (130°C). Teflon® lead wires internally connected.

- A minimum of 1" cold section at the lead end is required.
- Standard 10" (254 mm) leads. Specify longer leads.



Available for immediate delivery through the "Terminator" Program. **Note:** Applies only to Hi-Density Cartridge Heaters.



## Moisture Resistant Terminations

### Type M3 Teflon® End Plug Seal

Available on HDC and HDM cartridge heaters.

A moisture resistant Teflon® seal that is swaged in during the manufacturing process with Teflon® insulated lead wire.

Minimum 3/8" up to 1" cold section at the lead end is required. Temperature at the lead end not to exceed 350°F (176°C)

► Standard 10" (254 mm) leads. Specify longer leads.



### Type SA Sealed Armor Cable

Available on HDC, HDM and LDC cartridge heaters.

A liquid proof stainless steel corrugated metal hose is silver brazed to the end of the cartridge heater. The end disc of the heater is also welded or brazed. This termination provides a positive seal against moisture and contamination entering the heater.



## Flexing Resistant Terminations

### Type S1 Straight Spring


Available on HDC, HDM, and LDC cartridge heaters.

The leads are reinforced with a steel spring for applications with extreme flexing. The spring is mechanically fastened or silver brazed.


**S1A** Mechanically fastened spring.

**S1B** Silver brazed spring.

► Standard 10" (254 mm) leads. Specify longer leads.

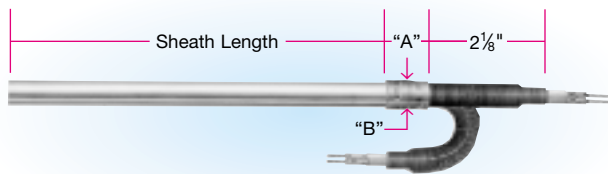

S1 Fig. 1"

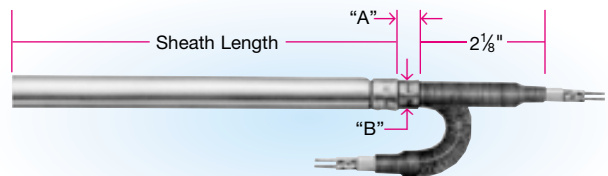

S1 Fig. 2

	Diameter		Fig.	"A" Dim.		"B" Dim.	
	in	mm		in	mm	in	mm
High Density	1/4	6.35	1	1 1/16	17.46	5/16	7.94
	5/16	7.94	1	1 1/16	17.46	7/16	11.11
	3/8	9.53	1	1 1/16	17.46	7/16	11.11
	1/2	12.70	1	1 3/16	20.64	9/16	14.29
	5/8	15.88	1	1	25.40	3/4	19.05
	3/4	19.05	1	1 1/4	31.75	7/8	22.23
Low Density	1	25.40	2	5/8	15.88	5/8	15.88
	3/16	4.76	—	—	—	—	—
	1/4	6.35	1	1 1/16	17.46	5/16	7.94
	3/8	9.53	1	1 1/16	17.46	7/16	11.11
	1/2	12.70	1	1 3/16	20.64	9/16	14.29
	5/8	15.88	2	7/16	11.11	9/16	14.29
	3/4	19.05	2	1/2	12.70	9/16	14.29
	7/8	22.23	2	5/8	15.88	9/16	14.29
15/16	23.81	2	5/8	15.88	5/8	15.88	
1	25.40	2	5/8	15.88	5/8	15.88	
1 1/4	31.75	2	5/8	15.88	5/8	15.88	





### Type S2\_\_ Right-Angle Spring


Available on HDC, HDM, and LDC cartridge heaters.

The leads are reinforced with a steel spring for applications with extreme flexing. The spring is mechanically fastened or silver brazed.


**S2A** Mechanically fastened spring

**S2B** Silver brazed spring

► Standard 10" (254 mm) leads. Specify longer leads.

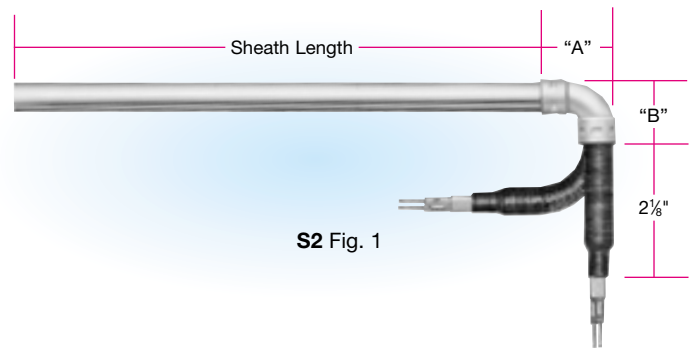

S2 Fig. 1

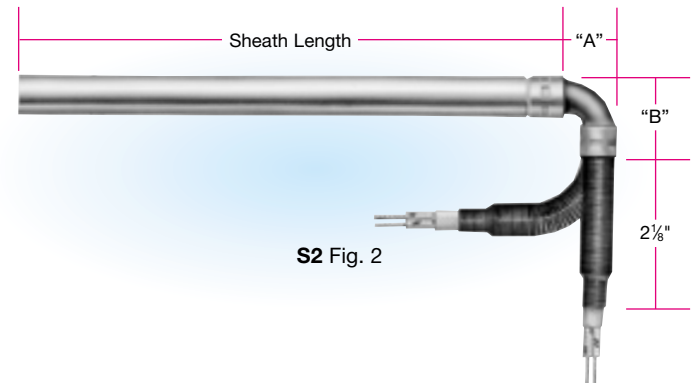

S2 Fig. 2

	Diameter		Fig.	"A" Dim.		"B" Dim.	
	in	mm		in	mm	in	mm
<b>High Density</b>	1/4	6.35	1	3/4	19.05	3/4	19.05
	5/16	7.94	1	15/16	23.81	15/16	23.81
	3/8	9.53	1	15/16	23.81	15/16	23.81
	1/2	12.70	1	1 1/4	31.75	1 1/4	31.75
	5/8	15.88	1	1 1/4	31.75	1 1/4	31.75
	3/4	19.05	1	1 3/4	44.45	1 1/4	31.75
<b>Low Density</b>	1	25.40	2	1 1/8	28.58	1 3/8	34.93
	3/16	4.76	—	—	—	—	—
	1/4	6.35	1	3/4	19.05	3/4	19.05
	3/8	9.53	1	15/16	23.81	15/16	23.81
	1/2	12.70	1	1 1/4	31.75	1 1/4	31.75
	5/8	15.88	2	1 1/16	17.46	1 1/4	31.75
	3/4	19.05	2	3/4	19.05	1 1/4	31.75
	7/8	22.23	2	3/4	19.05	1 3/8	34.93
	15/16	23.81	2	1 1/8	28.58	1 3/8	34.93
	1	25.40	2	1 1/8	28.58	1 3/8	34.93
1 1/4	31.75	2	1 1/8	28.58	1 3/8	34.93	



### Type S3 Lead Wire Strain Relief

Available on HDC, HDM, and LDC cartridge heaters.

Strain relief clip for leads subject to tension and stress. A "T" type strain relief is silver brazed to the sheath.

► Standard 10" (254 mm) leads. Specify longer leads.




### Type S4 Right-Angle Lead Wire Strain Relief

Available on HDC, HDM, and LDC cartridge heaters.

Strain relief clip for leads subject to tension and stress. A "T" type strain relief is silver brazed to the sheath and bent at a 90° angle.


► Standard 10" (254 mm) leads. Specify longer leads.

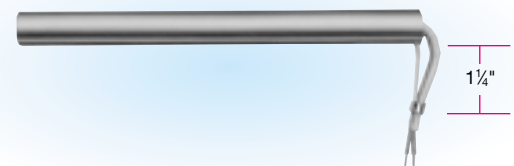

Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.



## Abrasive Resistant Terminations

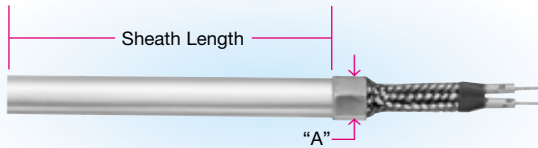

W Fig. 1




### Type W Wire Braided Leads

Available on HDC, HDM, and LDC cartridge heaters.

Stainless steel braid over fiberglass leads offers sharp bending not possible with armor cable, as well as abrasion protection.

- ▶ Minimum  $\frac{3}{8}$ " up to 1" cold section at the lead end is required. Temperature at the lead end is not to exceed 482°F (250°C). For higher temperature applications, special lead wires can be used—consult Tempco with your requirements.
- ▶ Standard 10" (254 mm) braid over 12" (305 mm) leads. Specify longer braid/leads.

Diameter		Fig.	"A" Dim./HD		"A" Dim./LD	
in	mm		in	mm	in	mm
$\frac{3}{16}$	4.76	1	—	—	$\frac{1}{4}$	6.35
$\frac{1}{4}$	6.35	1	$\frac{5}{16}$	7.94	$\frac{5}{16}$	7.94
$\frac{5}{16}$	7.94	1	$\frac{3}{8}$	9.53	—	—
$\frac{3}{8}$	9.53	2	$\frac{3}{8}$	9.53	$\frac{3}{8}$	9.53
$\frac{1}{2}$	12.70	2	$\frac{7}{16}$	11.11	$\frac{7}{16}$	11.11
$\frac{5}{8}$	15.88	2	$\frac{9}{16}$	14.29	$\frac{9}{16}$	14.29
$\frac{3}{4}$	19.05	2	$\frac{9}{16}$	14.29	$\frac{9}{16}$	14.29
$\frac{7}{8}$	22.23	2	—	—	$\frac{9}{16}$	14.29
$\frac{15}{16}$	23.81	2	—	—	$\frac{9}{16}$	14.29
1	25.40	2	$\frac{9}{16}$	14.29	$\frac{9}{16}$	14.29
$1\frac{1}{4}$	31.75	2	—	—	$\frac{9}{16}$	14.29

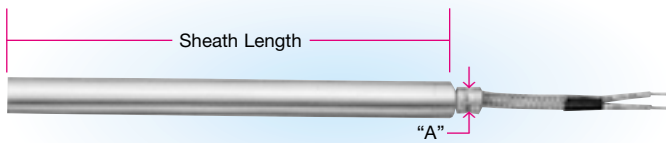

W Fig. 2

### Type W3 Swaged In Wire Braided Leads

Available on HDC and HDM cartridge heaters.

Stainless steel braid over fiberglass leads offers sharp bending not possible with armor cable, as well as abrasion protection. In addition, Type W3 offers moisture resistance due to the Teflon® seal required for holding the wire braid.

- ▶ Minimum  $\frac{3}{8}$ " up to 1" cold section at the lead end is required. Temperature at the lead end not to exceed 350°F (176°C).
- ▶ Standard 10" (254 mm) braid over 12" (305 mm) leads. Specify longer braid/leads.



Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.



### Type CS\_\_ Silver Brazed Cable to Sheath

Available on HDC, HDM, and LDC cartridge heaters.

The armor cable is silver brazed directly to the cartridge heater, eliminating the coupling, to maintain an overall diameter equal to or smaller than the cartridge diameter.

**CSA** Galvanized armor cable

**CSB** Stainless steel armor cable

- Standard 10" (254 mm) cable over 12" (305 mm) leads. Specify longer leads or cable.



### Type C1\_\_ Straight Armor Cable

Available on HDC, HDM, or LDC cartridge heaters.

Armor cable provides the maximum in protection for abrasive, jagged environments. The coupling between the cartridge and the armor cable is mechanically fastened or silver brazed.


**C1A** Galvanized armor cable, mechanically fastened

**C1B** Stainless steel armor cable, mechanically fastened


**C1C** Galvanized armor cable, silver brazed

**C1D** Stainless steel armor cable, silver brazed

- Standard 10" (254 mm) cable over 12" (305 mm) leads. Specify longer leads or cable.

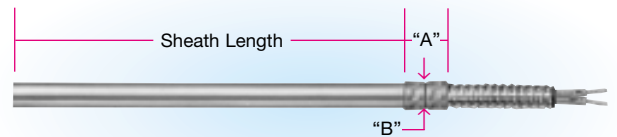

C1 Fig. 1

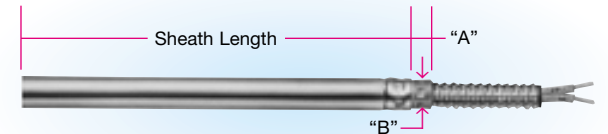


C1 Fig. 2

	Diameter		Fig.	"A" Dim.		"B" Dim.		Cable Dia.
	in	mm		in	mm	in	mm	
<b>Hi-Density</b>	1/4	6.35	1	1 1/16	17.46	5/16	7.94	1/4
	5/16	7.94	1	1 1/16	17.46	7/16	11.11	1/4
	3/8	9.53	1	1 1/16	17.46	7/16	11.11	3/8
	1/2	12.70	1	1 3/16	20.64	9/16	14.29	1/2
	5/8	15.88	1	1	25.40	3/4	19.05	1/2
	3/4	19.05	1	1 1/4	31.75	7/8	22.23	1/2
<b>Low Density</b>	1	25.40	2	5/8	15.88	5/8	15.88	1/2
	3/16	4.76	—	—	—	—	—	—
	1/4	6.35	1	1 1/16	17.46	5/16	7.94	1/4
	3/8	9.53	1	1 1/16	17.46	7/16	11.11	3/8
	1/2	12.70	1	1 3/16	20.64	9/16	14.29	1/2
	5/8	15.88	2	7/16	11.11	9/16	14.29	1/2
	3/4	19.05	2	1/2	12.70	9/16	14.29	1/2
	7/8	22.23	2	5/8	15.88	9/16	14.29	1/2
	1 5/16	23.81	2	5/8	15.88	5/8	15.88	1/2
	1	25.40	2	5/8	15.88	5/8	15.88	1/2
1 1/4	31.75	2	5/8	15.88	5/8	15.88	1/2	




Available for immediate delivery through the "Terminator" Program.


**Note:** Applies only to Hi-Density Cartridge Heaters.

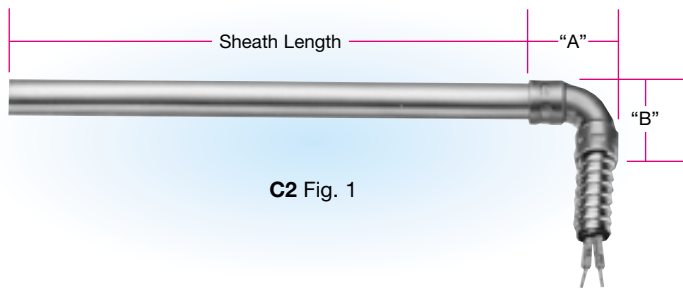


C2 Fig. 1

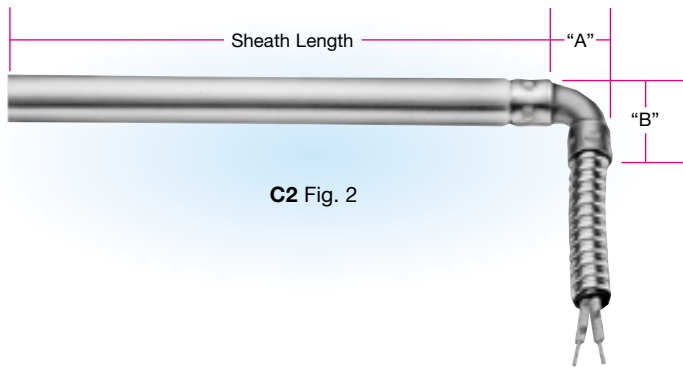

C2 Fig. 2

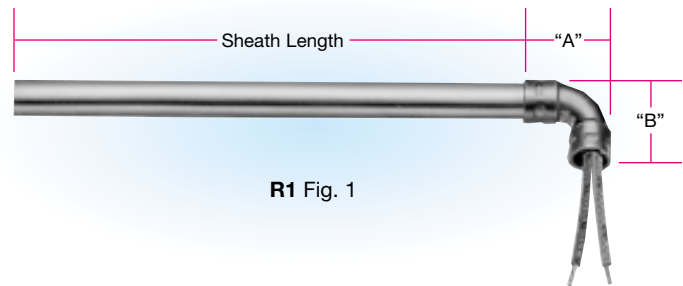

R1 Fig. 1

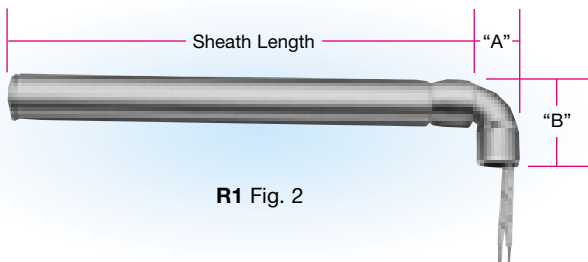

R1 Fig. 2

### ★ Type C2 Right-Angle Armor Cable with Copper Elbow

Available on HDC, HDM, and LDC cartridge heaters.

Armor cable provides the maximum in protection for abrasive, jagged environments. The copper elbow between the cartridge and the armor cable is mechanically fastened or silver brazed.

**C2A** Galvanized armor cable, mechanically fastened

**C2B** Stainless steel armor cable, mechanically fastened

**C2C** Galvanized armor cable, silver brazed

**C2D** Stainless steel armor cable, silver brazed

► Standard 10" (254 mm) cable over 12" (305 mm) leads. Specify longer cable or leads.

### Dimensions for Types C2 and R1

	Diameter		Fig.	"A" Dim.		"B" Dim.		Cable Dia.
	in	mm		in	mm	in	mm	
Hi-Density	1/4	6.35	1	3/4	19.05	3/4	19.05	1/4
	5/16	7.94	1	15/16	23.81	15/16	23.81	1/4
	3/8	9.53	1	15/16	23.81	15/16	23.81	3/8
	1/2	12.70	1	1 1/4	31.75	1 1/4	31.75	1/2
	5/8	15.88	1	1 1/4	31.75	1 1/4	31.75	1/2
	3/4	19.05	1	1 3/4	44.45	1 1/4	31.75	1/2
Low Density	1	25.40	2	1 1/8	28.58	1 3/8	34.93	1/2
	3/16	4.76	—	—	—	—	—	—
	1/4	6.35	1	3/4	19.05	3/4	19.05	1/4
	3/8	9.53	1	15/16	23.81	15/16	23.81	3/8
	1/2	12.70	1	1 1/4	31.75	1 1/4	31.75	1/2
	5/8	15.88	2	1 1/16	17.46	1 1/4	31.75	1/2
	3/4	19.05	2	3/4	19.05	1 1/4	31.75	1/2
	7/8	22.23	2	3/4	19.05	1 3/8	34.93	1/2
	15/16	23.81	2	1 1/8	28.58	1 3/8	34.93	1/2
	1	25.40	2	1 1/8	29.58	1 3/8	34.93	1/2
1 1/4	31.75	2	1 1/8	29.58	1 3/8	34.93	1/2	

### ★ Type R1 Right-Angle Leads w/Copper Elbow

Available on HDC, HDM, and LDC cartridge heaters.

This termination is used when space is limited. The copper elbow is mechanically fastened or silver brazed.

**R1A** Mechanically fastened

**R1B** Silver brazed

► 10" (254 mm) leads are standard. Specify longer leads.



Available for immediate delivery through the "Terminator" Program.

**Note:** Applies only to Hi-Density Cartridge Heaters.



### Type C3\_\_ Right-Angle Armor Cable

Available on HDC, HDM, and LDC cartridge heaters.

Use this termination when space is limited and maximum protection is required. The armor cable is silver brazed to the cartridge sheath at 90°. The sheath extension is potted with cement. Various lead end finishes are available as listed below.


**C3A** Cement potting and silicone varnish, with galvanized cable

**C3B** Cement potting and silicone varnish, with stainless steel cable

**C3C** Welded lead end disc, with galvanized cable

**C3D** Welded lead end disc, with stainless steel cable

► Standard 10" (254 mm) armor cable over 12" (305 mm) leads. Specify longer cable or leads.

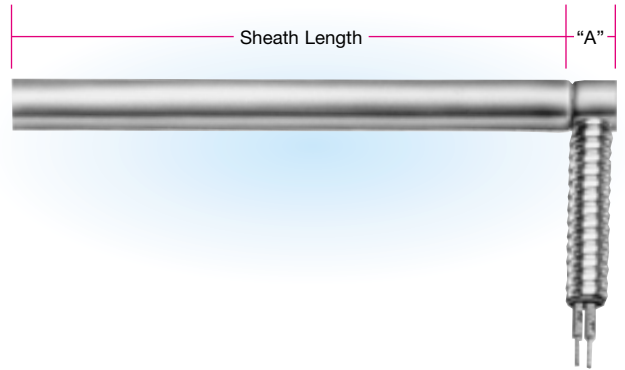

### Type W1\_\_ Right-Angle Wire Braided Leads


Available on HDC, HDM, and LDC cartridge heaters.

Stainless steel braid over fiberglass leads for abrasion protection, mechanically crimped to the cartridge sheath at 90°. Wire braid offers extreme flexibility not possible with armor cable. Various lead end finishes are available as listed below.

**W1A** Cement potting and silicone varnish

**W1B** Welded lead end disc

► Standard 10" (254 mm) braid over 12" (305 mm) leads. Specify longer braid or leads.

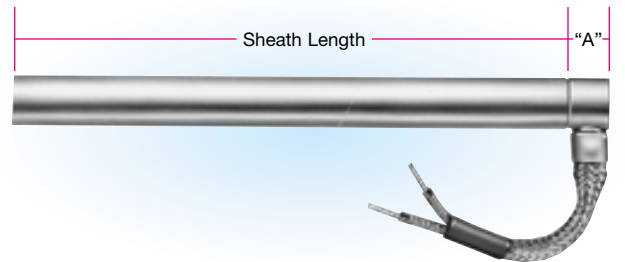

### Type R2\_\_ Right-Angle Leads


Available on HDC, HDM, and LDC cartridge heaters.

This termination is used when space is limited. Not suitable for abrasive environments. Same as C3 and W1 except plain fiberglass leads. The sheath extension is potted with cement. Various lead end finishes are available as listed below.

**R2A** Cement potting and silicone varnish

**R2B** Welded lead end disc

► Standard 10" (254 mm) leads. Specify longer leads.

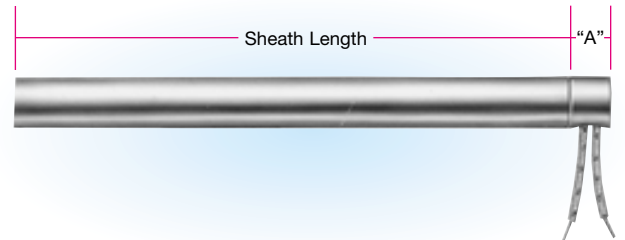

**Dimensions for types C3, W1 and R2**

Diameter		Availability		"A" Dim.		Armor Cable	
in	mm	HD	LD	in	mm	in	mm
3/16	4.76	No	No	—	—	—	—
1/4	6.35	Yes	Yes	5/16	7.94	1/4	6.35
5/16	7.94	Yes	No	5/16	7.94	1/4	6.35
3/8	9.53	Yes	Yes	7/16	11.11	3/8	9.53
1/2	12.70	Yes	Yes	5/8	15.88	1/2	12.70
5/8	15.88	Yes	Yes	5/8	15.88	1/2	12.70
3/4	19.05	Yes	Yes	5/8	15.88	1/2	12.70
7/8	22.23	No	Yes	5/8	15.88	1/2	12.70
15/16	23.81	No	Yes	5/8	15.88	1/2	12.70
1	25.40	Yes	Yes	5/8	15.88	1/2	12.70
1 1/4	31.75	No	Yes	5/8	15.88	1/2	12.70



Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.



## Other Angle Terminations




### Type R3 Angled Sheath Extension

Available on HDC, HDM, and LDC cartridge heaters.

The sheath extension is silver brazed to the cartridge at a 90° angle and cement potted. The leads are internally connected. The standard sheath extension is 3/8" long. Specify when ordering if a longer sheath is required. If abrasion resistance is required, armor cable or stainless steel wire braid can be attached to the sheath extension.

- R3A Plain leads 10" (254 mm) long
  - R3B 8" galvanized armor cable over 10" leads
  - R3C 8" stainless steel armor cable over 10" leads
  - R3D 8" stainless steel braid over 10" leads
- Specify if longer cable/leads are required.

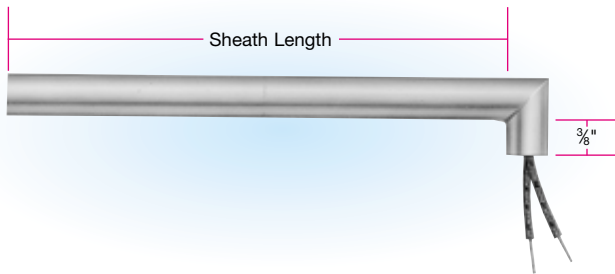


### Type R4 Bent Cartridge

Available on HDC and HDM cartridge heaters.

The heater sheath itself is bent to 90°. The bend is through a required cold section. The leads are internally connected. The standard sheath extension past the bend is 1". Specify when ordering if a longer sheath is required.

- R4A Plain leads 10" (254 mm) long
  - R4B 8" galvanized armor cable over 10" leads
  - R4C 8" stainless steel armor cable over 10" leads
  - R4D 8" stainless steel braid over 10" leads
- Specify if longer cable/leads are required.

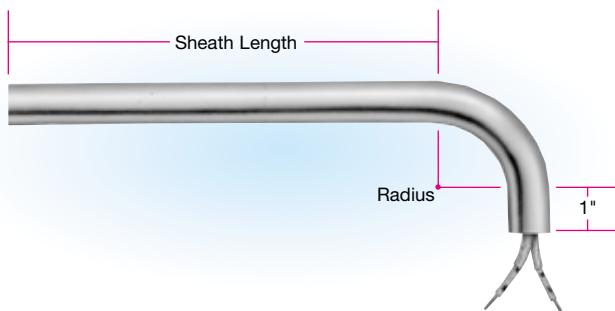

Cartridge Dia.	in	1/4	3/8	1/2	5/8	3/4	1
	mm	6.35	9.53	12.70	15.88	19.05	25.40
Bend Radius	in	1/2	1/2	3/4	1	1 1/4	1 1/2
	mm	12.70	12.70	19.05	25.40	31.75	38.10

## Standard Screw Terminations


### Type T1 Screw Terminals

Available on LD type cartridge heaters only.

For use with leads, crimp terminals, or bus bars. Includes high temperature washers and nuts. Diameters available: 3/4", 7/8", 15/16", 1", and 1 1/4".

- Standard screw: #6-32 x 3/4" long

Diameter	in	3/4	7/8	15/16	1	1 1/4
	mm	19.05	22.23	23.81	25.40	31.75
"A" Dimension	in	3/8	7/16	7/16	1/2	1/2
	mm	9.53	11.11	11.11	12.70	12.70

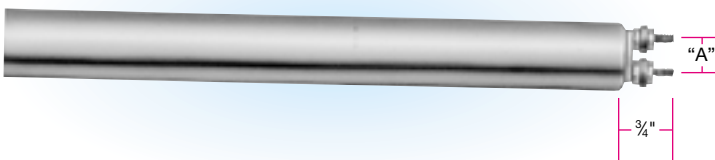

Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.



### Type T2 Screw Terminals

Available on HDC and HDM type cartridge heaters only.

For use with leads, crimp terminals, or bus bars. Includes high temperature washers and nuts.

Diameters available: HD — 5/8", 3/4", 1"  
HDM — 16 and 20 mm

► Standard screw: #8-32



### Double End Terminations

#### Type T4 Double End Terminal Pin

Available on HDC, HDM, and LDC cartridge heaters.

For those applications where wiring from both ends is an advantage. Standard terminal pin length is 2". A minimum of 1" cold section at each end is required. Various seals are available:

**T4A** Cement potting seal with silicone varnish—1000°F (537°C)

**T4B** High temp. moisture resistant epoxy seal—450°F (232°C)

**T4C** Low temp. moisture resistant epoxy seal—266°F (130°C)



#### Type F1 Double End Flexible Leads

Available on HDC, HDM, and LDC cartridge heaters.

For applications where it is an advantage to wire from both ends. The leads are internally connected and can be bent sharply as they exit the potted ends. Various seals are available:


**F1A** Cement potting seal with silicone varnish—482°F (250°C)

**F1B** High temp. moisture resistant epoxy seal—450°F (232°C)

**F1C** Low temp. moisture resistant epoxy seal—266°F (130°C)

**Note:** A minimum of 1" cold section at each end is required.

► 10" leads are standard. Specify longer leads.

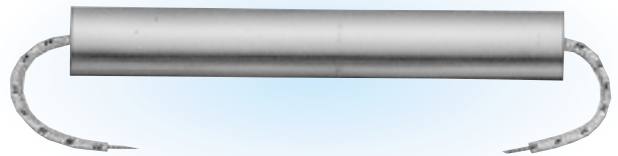


#### Type T3 Double End Screw Terminal

Available on HDC, HDM, and LDC cartridge heaters from 1/2" to 1 1/4" diameter.

A double ended heater with quick change wiring screw terminals. Includes high temperature washers and nuts.

► 1/2" diameter — #8-32 x 3/4" screws

► 5/8" to 1 1/4" diameter — #10-32 x 3/4" screws




Available for immediate delivery through the "Terminator" Program.

**Note:** Applies only to Hi-Density Cartridge Heaters.




## Pipe and Bulkhead Fitting Terminations

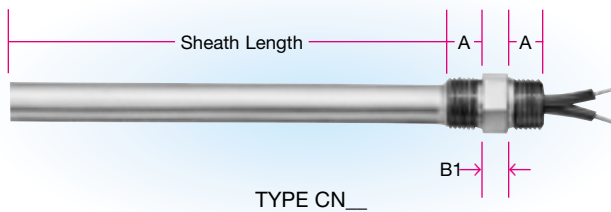

TYPE CN\_\_

### Type Codes for Double Threaded Fittings

Potting Seal Type	Bushing Material		
	Brass	Steel	304 SS
Low Temp Epoxy	CNA	CNG	CNN
Hi Temp Cement	CNB	CNH	CNP
Silicone Rubber	CNC	CNJ	CNQ
Hi Temp Epoxy	CND	CNK	CNR
Teflon® End Plug Seal	CNE	CNL	CNS
Empty Cavity	CNF	CNM	CNT

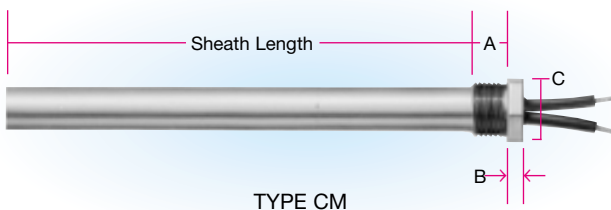

TYPE CM\_\_

### Type Codes for Single Threaded Fittings

Potting Seal Type	Bushing Material		
	Brass	Steel	304 SS
Low Temp Epoxy	CMA	CMG	CMN
Hi Temp Cement	CMB	CMH	CMJ
Silicone Rubber	CMC	CMK	CMQ
Hi Temp Epoxy	CMD	CMJ	CMR
Teflon® End Plug Seal	CME	CML	CMS
Empty Cavity	CMF	CMM	CMT



### Type CN\_\_ Double Threaded Fitting Type CM\_\_ Single Threaded Fitting

**Note:** Teflon® end plug seals are not available through the Terminator program. Stainless steel fittings are available through the Terminator program only on heaters ½" diameter and bigger.

**Available on HDC, HDM and LDC cartridge heaters.**

A double threaded or single threaded pipe fitting is attached to the end of a cartridge heater to allow for installation into a threaded hole. The brass or steel fitting is silver brazed. The stainless steel fitting is heli-arc welded.

The bushing cavity can be sealed with various materials such as:

- Low temperature epoxy potting—266°F (130°C)  
Teflon® leads, internally connected.
  - High temperature epoxy potting—450°F (232°C)  
Teflon® leads, internally connected.
  - Silicone rubber potting—450°F (232°C)  
Silicone rubber leads, internally connected.
  - Cement potting with silicone varnish—1000°F (538°C)  
Stainless steel fitting, with fiberglass leads externally connected.
  - Swaged-in Teflon® end plug seal—350°F (176°C)  
Teflon® leads, internally connected (available on HDC and HDM cartridge heaters only). Bushing to be offset up to 1".
- A minimum of ¼" cold section behind the bushing is required.
- Standard 10" (254 mm) leads. Specify longer leads.

### Standard NPT Bushing Dimensions

Heater Diameter (in)	NPT Size	"A"	"B"	"B1"	"C"
¼	¼-27	¾	¾	¼	7/16
⅜	¼-18	½	¾	¼	9/16
½	¾-18	9/16	¾	¼	11/16
5/8	½-14	5/8	¾	5/16	7/8
¾	¾-14	¾	¾	¾	1 1/8
7/8	1-11½	¾	¾	¾	1 1/8
1	1-11½	¾	¾	¾	1 1/8
1¼	1¼-11½	7/8	5/16	½	1¾



### Type BF\_\_ Bulkhead Fitting

**Available on HDC and LDC ½" and 5/8" cartridge heaters.**

A 5/8-18 UNF brass fitting is silver brazed to the cartridge for mounting the heater to the wall of a tank or enclosure. Includes a copper washer and jam nut. The lead wires are internally connected. To prevent moisture or contamination, the bushing cavity can be filled with various materials. Optional stainless steel fittings are available—specify.

**BFA** Low temperature epoxy potting—266°F (130°C)

**BFB** Silicone rubber potting—450°F (232°C)

**BFC** High temperature epoxy potting—450°F (232°C)

- A minimum ¼" cold section below the bulkhead fitting is required.
- Standard 10" (254 mm) leads. Specify longer leads.



**Warning:** For CN, CM and BF terminations in applications where temperature can exceed 450°F (232°C), epoxy potting cannot be used as it will carbonize and damage the heater.




Available for immediate delivery through the "Terminator" Program. **Note:** Applies only to Hi-Density Cartridge Heaters.

**(For a Complete Selection of Standard Cartridge Immersion Heaters See Pages 2-48 and 2-49)**





### Mounting and Removal



#### Type MFR Mounting Flange – Round

Available on HDC, HDM, and LDC cartridge heaters.


Recommended for applications where excessive vibration exists and may cause the heater to back out of its mounting hole. The flange is used as a means of securing the cartridge heater in place.

► Standard 10" externally connected leads. Specify longer leads.

**Standard Round Mounting Flanges**

Heater Diameter in (mm)	"F"		"C"		"H"	
	in	mm	in	mm	in	mm
1/4 (6.35), 5/16 (7.94), 3/8 (9.53), 1/2 (12.70), 5/8 (15.88), 3/4 (19.05)	1 1/2	38.10	1 1/8	28.57	.156	3.97
7/8 (22.23), 1 (25.40), 1 1/4 (31.80)	2	50.80	1 5/8	41.28	.203	5.16

**Note:** 5/16" dia. cartridge heater can only be HDC; 7/8" and 1 1/4" can only be LDC.



#### Type MFH Mounting Flange – Hex

Available on HDC, HDM, and LDC cartridge heaters.

A hex shape to allow the possibility of using a wrench when removal is tight. The flange is used as a means of securing the cartridge heater in place.

► Standard 10" externally connected leads. Specify longer leads.

**Standard Hex Mounting Flanges**

Heater Diameter in mm	"F"		"C"		"H"	
	in	mm	in	mm	in	mm
1/4 6.35	1	25.40	3/4	19.05	.144	3.66
5/16 7.94	1	25.40	3/4	19.05	.144	3.66
3/8 9.53	1	25.40	3/4	19.05	.144	3.66
1/2 12.70	1 3/8	35.03	1 5/32	29.37	.187	4.76
5/8 15.88	1 3/8	35.03	1 5/32	29.37	.187	4.76
3/4 19.05	1 3/8	35.03	1 5/32	29.37	.187	4.76
7/8 22.26	1 7/8	47.63	1 1/16	39.69	.203	5.16
1 25.40	1 7/8	47.63	1 1/16	39.69	.203	5.16
1 1/4 31.80	1 7/8	47.63	1 1/16	39.69	.203	5.16



#### Type LR Locating Ring

Available on HDC, HDM, and LDC cartridge heaters.

A locating ring can be attached to the heater to aid in positioning the heater for the application. The default position of the ring is 1/4" from the lead end. Specify the position of the ring when ordering.

► Standard 10" externally connected leads. Specify longer leads.



#### Type PS Pull Strap

Available on HDC, HDM, and LDC cartridge heaters.

A stainless steel wire rope is silver brazed to the lead end of the cartridge heater sheath to assist in removing the heater.

► Standard 10" externally connected leads. Specify longer leads.



Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.



## Terminal Boxes



### Type E1\_\_ General Purpose Terminal Box

**Available on HDC, HDM, and LDC cartridge heaters.**

General purpose NEMA 1 electrical enclosure designed to provide protection from electrical shock. The boxes have  $\frac{5}{8}$ " conduit knockouts and are silver brazed to the cartridge sheath.



**E1A** Terminal box w/fiberglass leads

**E1B** Terminal box w/galvanized armor cable and fiberglass leads

**E1C** Terminal box w/stn. stl. armor cable and fiberglass leads

**E1D** Terminal box w/stn. stl. wire braid and fiberglass leads


**E1E** Terminal box w/screw terminals

- Standard 10" (254 mm) cable/braid over 12" (305 mm) leads. Specify longer cable/leads.

### Type E2\_\_ Moisture Proof Terminal Box

**Available on HDC, HDM, and LDC cartridge heaters.**

NEMA 4 PVC electrical enclosures provide protection from splashing or hose directed water, external condensation and water seepage. The box is mechanically attached to the cartridge sheath and the heater is sealed with moisture resistant epoxy.

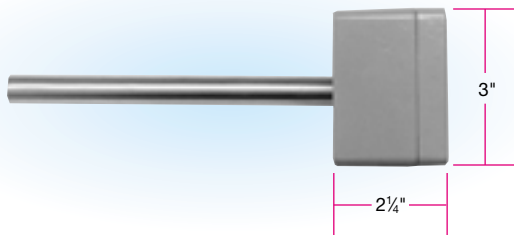

**E2A** Terminal box w/Teflon® leads

**E2B** Terminal box w/galvanized armor cable and Teflon® leads

**E2C** Terminal box w/stn. stl. armor cable and Teflon® leads

**E2D** Terminal box w/stn. stl. wire braid and Teflon® leads

**E2E** Terminal box w/screw terminals


- A minimum of 1" cold section at the lead end is required.
- Standard 10" (254 mm) cable/braid over 12" (305 mm) leads. Specify longer cable/leads.



### Type E3\_\_ Explosion Resistant Terminal Box

**Available on HDC, HDM, and LDC cartridge heaters.**

NEMA 4/7 combination electrical enclosures provide protection from contaminants, moisture, and hazardous conditions. The box is silver brazed to the cartridge sheath. The explosion resistant housing has a  $\frac{1}{2}$ "-14 NPT outlet hub.

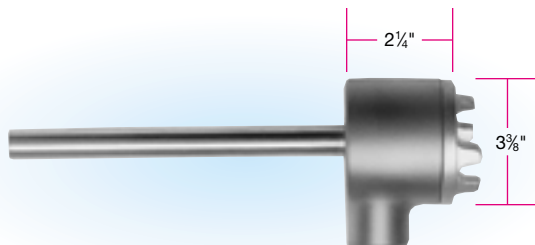

**E3A** Terminal box, w/10" fiberglass leads

**E3B** Terminal box w/screw terminals and 10" fiberglass leads

- Standard 10" (254 mm) leads. Specify longer leads.



Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.



### High Temperature Terminations



#### Type B Heat Resistant Ceramic Bead Insulation

Available on HDC, HDM, and LDC cartridge heaters.

The ultimate in high temperature lead protection. Allows for the attachment of flexible leads to the heater away from the high heat area.

- Temperature range: up to 1200°F (650°C)
- Standard 10" (254 mm) solid nickel pins insulated with ball and socket construction type ceramic beads



### Options — Lead End Connections



#### Type RT Ring Terminal

#### Type ST Spade Terminal

#### Type QTA 1/4" Female Straight Quick Disconnect

#### Type QTB 1/4" Female Right-Angle Quick Disconnect

Available on HDC, HDM and LDC cartridge heaters.

Various types of crimp terminals can be attached to the heater leads to make wiring into applications quick and easy. Non-insulated and insulated with nylon (221°F/105°C) or PVC (194°F/90°C).

**Note:** Specify insulation type and size (#6, #8, or #10) when ordering. Standard is a non-insulated #10 terminal. Consult Tempco with your requirements.




#### Type P Quick Disconnect Plugs

Available on HDC, HDM, and LDC cartridge heaters.

Allows for the quick and easy replacement of the heater. The plug can be attached to galvanized armor cable, stainless steel armor cable, or wire braid.

Plug Type	Description
1	2 pole/2 wire twist locking plug 15 amp 125 volt, NEMA L1-15P
2	2 pole/3 wire twist locking plug 15 amp 125 volt or 10 amp 250 volt, NEMA N/A. This plug is not listed by UL, and is recommended for replacement use only.
3	2 pole/3 wire straight blade plug 15 amp 125 volt, NEMA 5-15P
4	2 pole/3 wire twist locking plug 15 amp 125 volt, NEMA L5-15P
5	2 pole/3 wire twist locking plug 15 amp 250 volt, NEMA L6-15P

**Note:** For other type plugs, consult Tempco or specify the manufacturer's part number when ordering.

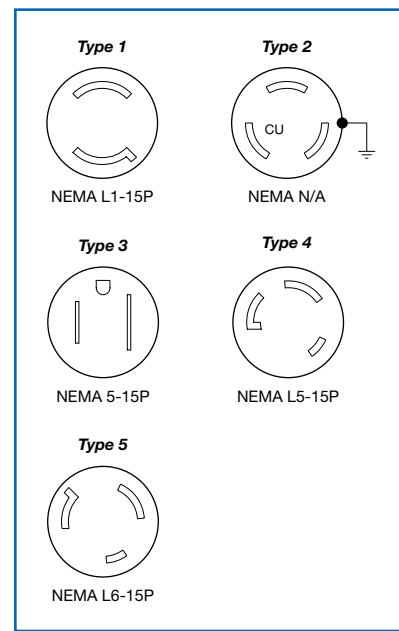

Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.



## Built-In Internal Thermocouples



Type TJ1 and TK1



Type TJ2 and TK2



Type TJ3 and TK3



Type TJ4 and TK4



Type TJ5 and TK5

**Built-in Internal Thermocouples are available on all HDC, HDM, and LDC cartridge heater diameters except for  $\frac{3}{16}$ " ,  $\frac{5}{16}$ " and 8 mm.**

**Note:** Type TJ4 and TK4 is not available on  $\frac{1}{4}$ " and 6.5 mm diameter cartridges.

10" leads are standard for both heater and thermocouple. Leads are internally connected. Specify longer leads.

ANSI Code	Conductor Characteristics		Temperature Range	
	Positive	Negative	°F	°C
J	Iron (Magnetic)	Constantan (Non-Magnetic)	0 to 1400°	-17 to 760°
K	Chromel (Non-Magnetic)	Alumel (Magnetic)	0 to 2300°	-17 to 1260°

For other thermocouple types consult Tempco.

### Type TJ1 and TK1 **Grounded at Disc End**

The thermocouple junction is grounded to the sheath at the disc end and packed with MgO. The concave end disc is filled with silver solder and ground flat. When inserted into a flat end blind hole, it will provide fast responsive temperature readings. Widely used in Hot Runner mold probes.

**TJ1** Type "J" thermocouple; **TK1** Type "K" thermocouple

### Type TJ2 and TK2 **Ungrounded at Disc End**

The thermocouple junction is ungrounded, located at the end of the heater section,  $\frac{1}{8}$ " behind the end disc and packed with MgO. Only provides reference temperature reading of the part being heated – slower response.

**TJ2** Type "J" thermocouple; **TK2** Type "K" thermocouple

### Type TJ3 and TK3 **Ungrounded at Center**

The thermocouple junction is ungrounded and is located in the center of the length and diameter of the cartridge heater. It provides internal temperature readings of the heater core. Generally used for research applications and is not recommended for controlling process temperatures.

**TJ3** Type "J" thermocouple; **TK3** Type "K" thermocouple

### Type TJ4 and TK4 **Grounded at Center**

The thermocouple junction is grounded to the sheath in a  $\frac{1}{2}$ " unheated section located in the center of the cartridge length unless otherwise specified. It provides good temperature readings with quick response.

**TJ4** Type "J" thermocouple; **TK4** Type "K" thermocouple

### Type TJ5 and TK5 **Grounded at Lead End**

The thermocouple junction is grounded to the sheath at the lead end. A minimum of  $\frac{3}{8}$ " of cold section is required. It provides good temperature readings with quick response.

**TJ5** Type "J" thermocouple; **TK5** Type "K" thermocouple



Available for immediate delivery through the "Terminator" Program. **Note:** Applies only to Hi-Density Cartridge Heaters.



For a complete selection of standard Hi-Density Pennybottom™ Cartridge Heaters, with built-in Type J thermocouple for Hot Runner plastic molds, see pages 2-52 through 2-59. **Available from stock.**



### Other Internal Sensors and Controls

**Type TM Thermistor**

**Type RD RTD Temperature Sensors**

Available on HDC, HDM, and LDC cartridge heaters.

Tempco has the ability to custom design cartridge heaters with built-in temperature sensors such as thermistors and RTD's. For specific applications that have a limited or single set point range, thermistors or RTD's in conjunction with simple electronic controllers can be an economical choice.

**Type TF Thermal Fuses**

Available on HDC, HDM, and LDC cartridge heaters 1/2" diameter and larger.

Thermal fuses can be built into cartridge heaters to act as a high limit for the heater in applications where the temperature must be limited to avoid dangerous situations. When the trigger point is reached, the thermal fuse will open, cutting the electrical current to the cartridge heater. Once the thermal fuse opens, it cannot be reset. Many different trigger temperatures are available.

**Type TS Thermostat**

Available on HDC, HDM, and LDC cartridge heaters 1/2" diameter or larger.

Cartridge heaters with built-in thermostats are very efficient and economical for heating and controlling temperatures. Available with NPT or special type mounting fittings, they provide a self-contained heater mainly recommended for immersion applications. They can also be used as over-temperature safety devices. The thermostats are factory preset for the trip temperature; therefore, prototyping and testing is required to determine the exact fixed set point. Maximum temperature—302°F(150°C). Maximum Amps—8@120 Volts.

A minimum 2 1/2" cold section is required to house the thermostat. Consult Tempco with your requirements.




Type TS

### Internal Power Variations

**Type DW Distributed Wattage**

Available on HDC and HDM cartridge heaters.


Cartridge heaters can be designed to vary the wattage along the length of the heater. Specify number of zones and the required watts and length per zone starting from the disk end. Leads can be connected externally or internally. Picture shows a heater with Type N externally connected leads. Heaters with other terminations may require a longer cold section at the lead end.



**Type 3PH Three Phase**

Available on HDC, HDM, and LDC cartridge heaters.

In order to minimize the gauge of the wiring on high wattage cartridge heaters, 3-phase elements can be designed.




**Type DV\_\_ Dual Voltage**

Available on HDC, HDM, and LDC cartridge heaters.

Cartridge heaters can be designed using 3 wire series/parallel circuits for dual voltage applications. Whether the heater is run on the high or low voltage, the wattage will be the same.

**DV1** 120/240 volts      **Note:** Other voltage combinations can be designed.  
**DV2** 240/480 volts




**Type DWV Dual Circuits**

Available on HDC, HDM, and LDC cartridge heaters.

Independent resistance elements can be designed in a single cartridge heater for added versatility.



## Internal Power Variations *continued*




### Type MHZ Multiple Heat Zones

**Available on HDC, HDM, and LDC cartridge heaters.**

Multiple independently operated sections of the heater with a common wiring connection can be designed for increased flexibility.

Consult Tempco with your requirements.




### Type GJ Grounded Element Winding

**Available on HDC, HDM, and LDC cartridge heaters.**

For DC applications where the electrical circuit is negative grounded, the cartridge heater can be designed with one side of the element winding grounded to the sheath and a single lead wire exiting the cartridge heater.

Consult Tempco with your requirements.




### Type GL Ground Lead/Sheath

**Available on HDC, HDM, and LDC cartridge heaters.**

For those applications requiring a separate ground lead attached to the cartridge heater sheath.

Standard lead is 10" —insulation same as element leads but different color.

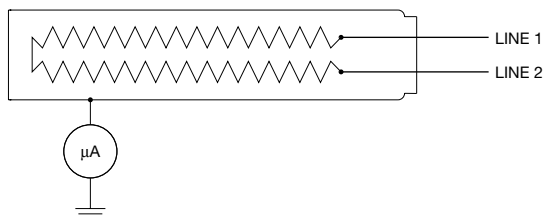

### Type LLC Low Leakage Current

**Available on HDC, HDM, and LDC cartridge heaters.**

Low leakage current construction is available for those applications such as medical products that require strict conforming to regulatory agencies' requirements.

Consult Tempco with your requirements.

## Cartridge Sheath Options

### Type ELP Electro-Polish

**Available on HDC, HDM, and LDC cartridge heaters.**

Electro-Polishing is an electro-chemical process that removes surface imperfections and contaminants, enhancing the corrosion resisting ability of the heater sheath.

### Type PAS Passivation

**Available on HDC, HDM, and LDC cartridge heaters.**

Passivating is a chemical process accomplished by dipping the heater in a solution of nitric acid. The process removes surface contamination, usually iron, so that the optimum corrosion resistance of the stainless steel is maintained.

### Type DSM Optional Sheath Material

Standard sheath material is 321 stainless steel for Hi-Density Cartridge Heaters except 1" diameter, and 304 stainless steel for 1" diameter Hi-Density and all Low Density Cartridge Heaters.

If your application requires a specific alloy sheath material, consult Tempco with your requirements.

To assist you in selecting the proper sheath material, corrosion resistant ratings and chemical properties of various heater sheath materials are given in the engineering section in the back of this catalog.



Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.



### Lead Options

#### Type MIL High Temperature Lead Wire

Available on HDC, HDM and LDC cartridge heaters.

When required, high temperature lead wire can be used on all cartridge heaters. The stranded nickel conductor wire is insulated with mica tapes and then a treated fiberglass overbraid.

Maximum temperature: 450°C (842°F)

Consult Tempco with your requirements.



#### Type SR Silicone Rubber Slewing

Available on HDC, HDM and LDC cartridge heaters.

For added protection, strength, and resistance to various chemicals, the lead wires can be covered with silicone rubber slewing.

**SRA** Silicone rubber slewing on each lead separately

**SRB** Silicone rubber slewing on both leads together


Specify length when ordering.



#### Type HA Heat Shrink Covered Armor Cables

Available on HDC, HDM and LDC cartridge heaters.

Either the galvanized or stainless steel armor cable can be covered with moisture proof heat shrink PVC tubing.

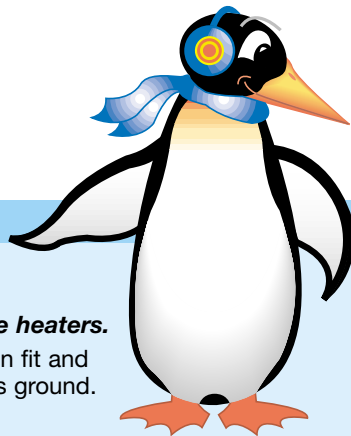

## TEMPCO has loads of options for your cartridge heaters...

#### Type CG Centerless Grinding

Available on HDC and HDM cartridge heaters.

For applications requiring high precision fit and tolerance, the sheath can be centerless ground.

Tolerance:  $\pm 0.0005$  inches (0.013 mm)

Specify diameter when ordering.

#### Type SDA End Disc Seals Silver Brazed

#### Type SDB End Disc Seals Heli-Arc welded

Available on LDC cartridge heaters.

End discs on HDC and HDM cartridge heaters are heli-arc welded as standard.

The normally mechanically attached end discs on LD cartridge heaters can be silver brazed or heli-arc welded if desired.

## Tempco can Design/Manufacture a heater to fit any application!



# HI DENSITY CARTRIDGE IMMERSION HEATERS

**Hi-Density Cartridge Immersion Heaters** are designed for heating water and other liquids. The high watt density capability of this heater permits greater heat dissipation in a given area than would a tubular immersion heater. However, it is important to note that allowable watt density depends on the material being heated. For water heating watt densities of several hundred watts per square inch are possible while oil heating may be limited to 5–20 watts per square inch. Additional information on Watt Density can be found in the technical section at the back of this catalog.

## Features

- \* Hi-Density Design
- \* Maximum Voltage to 480V
- \* Incoloy® Sheath Material
- \* Teflon® Insulated Lead Wires
- \* Optional 321 and 316 Stainless Steel Sheath
- \* Passivated Sheath
- \* Stainless Steel or Brass Screw Plug
- \* Epoxy Seal at Lead End 266°F (130°C)
- \* Available From Stock in 48 Hours
- \* Six Termination Types to Select From

Standard NPT and Heater Sizes		
NPT Size	1/2-14	3/4-14
Cartridge Diameter	5/8	3/4



### Type CM Single Threaded Screw Plug

Easy installation into threaded NPT holes.




### Type CN Double Threaded Screw Plug

Allows direct installation of conduit or conduit boxes to the heater.




### Type BF Bulkhead Fitting

A 5/8-18 UNF brass bulkhead fitting is silver brazed to the cartridge heater for mounting the heater to the wall of a tank or enclosure. No need for expensive female fittings on the mating part. Heater comes complete with copper washer and jam nut. Available only on 5/8" diameter heaters.

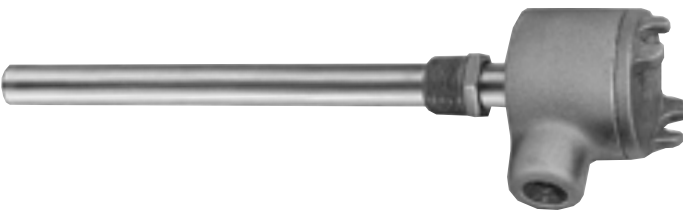

### Type MR/ER Moisture/Explosion Resistant Terminal Box

A cast aluminum moisture resistant (Nema 4) and explosion resistant (Nema 7) housing is silver brazed to the heater extension. Housing has a 1/2" NPT outlet hub. Heater has 10" long leads for easy electrical hookup.

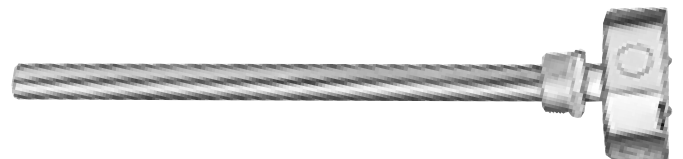

### Type E General Purpose Terminal Box

Octagonal (E8) or rectangular (E4) boxes with 5/8" conduit knockouts provide excellent housing for electrical conduit hookup. Heater has 10" long leads. When ordering, specify type of box.



### Type P Quick Disconnect Plug

Two-prong quick disconnect twist lock plug is attached to 10" of armor cable as standard. See accessories section for plug and cable options.



Available for immediate delivery through the "Terminator" Program.  
**Note:** Applies only to Hi-Density Cartridge Heaters.





**STOCK ITEMS**  
**ORDER NOW!**®



Termination types CM, CN, BF, MR, ER, E and P can be applied to stock heaters. Part Numbers listed are for 1/2" and 3/4" NPT brass screw plug cartridge immersion heaters with Type CM termination and 10" long leads.

### 1/2" NPT Screw Plug Hi-Density Cartridge Immersion Heaters

Diameter	Heater Immersion Length		Watts	Watt Density		Part Number		
	in	mm		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V	480V
5/8" Incoloy	1 1/2	38.1	100	41	6	HDL00001	—	—
	1 1/2	38.1	400	163	25	—	HDL00002	—
	3 1/2	88.9	250	39	6	HDL00003	HDL00004	—
	3 1/2	88.9	1000	157	24	—	HDL00005	HDL00006
	7 7/8	200.0	500	33	5	HDL00007	HDL00008	—
	7 7/8	200.0	2000	134	21	—	HDL00009	HDL00010
	12	304.8	750	33	5	HDL00011	HDL00012	—
	12	304.8	3000	130	20	—	HDL00013	HDL00014

**STOCK ITEMS**  
**ORDER NOW!**®

### 3/4" NPT Screw Plug Hi-Density Cartridge Immersion Heaters

Diameter	Heater Immersion Length		Watts	Watt Density		Part Number		
	in	mm		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V	480V
3/4" Incoloy	4 1/4	108.0	500	53	8	HDL00015	HDL00016	—
	4 1/4	108.0	750	80	12	HDL00017	HDL00018	—
	4 1/4	108.0	1000	106	16	HDL00019	HDL00020	—
	4 5/8	117.5	300	29	5	HDL00021	HDL00022	—
	4 5/8	117.5	1200	116	18	—	HDL00023	HDL00024
	4 3/4	120.7	375	35	5	HDL00025	HDL00026	—
	4 3/4	120.7	1500	141	22	—	HDL00027	HDL00028
	5 1/4	146.1	500	39	6	HDL00029	HDL00030	—
	5 1/4	146.1	2000	154	24	—	HDL00031	HDL00032
	6 1/4	158.8	500	35	5	HDL00033	HDL00034	—
	6 1/4	158.8	2000	141	22	—	HDL00035	HDL00036
	6 1/2	165.1	625	42	7	HDL00037	HDL00038	—
	6 1/2	165.1	2500	170	26	—	HDL00039	HDL00040
	7 1/4	184.2	750	45	7	HDL00041	HDL00042	—
	7 1/4	184.2	3000	182	28	—	HDL00043	HDL00044
	9	228.6	1000	49	8	HDL00045	HDL00046	—
	9	228.6	4000	194	30	—	HDL00047	HDL00048
	10 1/2	266.7	750	31	5	HDL00049	HDL00050	—
	10 1/2	266.7	3000	124	19	—	HDL00051	HDL00052
	10 3/4	273.1	1250	51	8	HDL00053	HDL00054	—
	10 3/4	273.1	5000	202	31	—	HDL00055	HDL00056
	12 1/2	317.5	1500	52	8	—	HDL00057	—
	12 1/2	317.5	6000	208	32	—	—	HDL00058
	13 3/8	346.1	1000	32	5	HDL00059	HDL00060	—
	13 3/8	346.1	4000	127	20	—	HDL00061	HDL00062
	16	406.4	2000	54	8	—	HDL00063	—
	16	406.4	8000	216	33	—	—	HDL00064
	19 1/4	489.0	2500	56	9	—	HDL00065	—
	19 1/4	489.0	10000	223	35	—	—	HDL00066

Available for Immediate Delivery through —



Program

**For Shipment within 48 hours**  
 (All six termination types)

### How to Order

#### Stock Heaters

Part Numbers listed above are for 1/2" and 3/4" NPT Brass Screw Plug Cartridge Immersion Heaters with Type CM termination and 10" long leads.

Termination types CN, BF, MR, ER, E and P can be applied to stock heaters. For these terminations the heater part number will be assigned at time of order.

#### Custom Engineered/Manufactured Heaters


Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Cartridge Immersion Heater to meet your requirements. **Standard lead time is 3 weeks.**

**Please Specify** the following:

- Screw Plug NPT Size
- Screw Plug material (Brass or SS)
- Sheath material (Incoloy®, 321 or 316 SS)
- Element Watt Density
- Immersion Length
- Heated Length
- Wattage
- Voltage
- Termination types
- Lead Length



# BOLT HEATERS

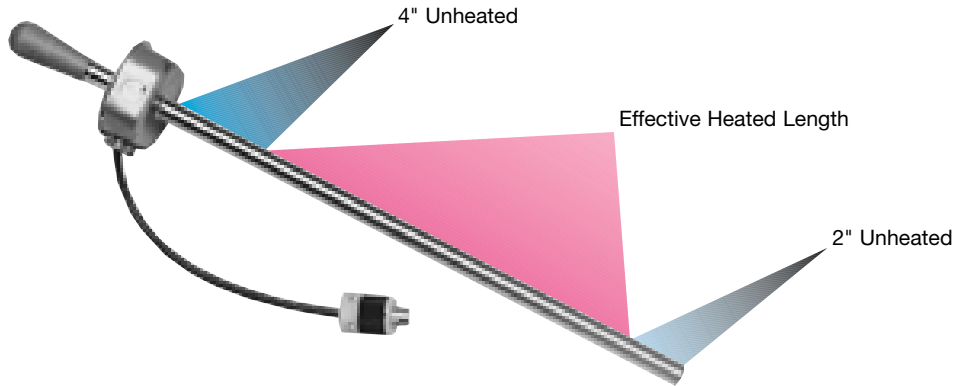

**TEMPCO Bolt Heaters** are used as an aid to tighten large bolts in heavy machinery and equipment. Heaters are sized for easy insertion into a drilled hole in the bolt. The rapid heating of the bolt expands it, allowing further tightening of the nut. The heater is then de-energized and removed. As the bolt cools, its contraction back to original size provides a tight fit.

Tempco Bolt Heaters are constructed with one of the industry's most efficient and highest quality heating elements—TEMPCO Hi-Density (swaged) Cartridge Heaters. With close tolerance fits, watt densities of 100 watts per square inch are obtainable—65% higher than standard cartridge or tubular heating elements can deliver. The higher wattage on Hi-Density Bolt Heaters means quicker heat-up time and minimum heat loss to the area surrounding the bolt.

## Features

- \* Hi Density Construction
- \* Conduit Box with Knockouts
- \* Wooden Handle
- \* High Temperature Lead Wires—250°C (482°F)
- \* Optional SJO Cord or Post Terminals
- \* Optional Quick Disconnect Plugs

## Typical Industries

- Power Plants
- Shipyards
- Large Machine and Die Manufacturers
- Construction
- Boiler Manufacturers

## Typical Applications

- Large Compressors
- Turbines
- Die Blocks
- Large Cylinders
- Engine Heads
- Pressure Vessels

**Standard Specifications and Tolerances** of Bolt Heaters.  
If tighter tolerances are required consult Tempco.

### DIMENSIONAL SPECIFICATIONS

Actual Diameter (in)	.438	.496	.553	.580	.621	.660	.710	.745	.813	.993
Actual Diameter (mm)	11.1	12.6	14.0	14.7	15.8	16.8	18.0	18.9	20.7	25.2
Diameter Tolerance	±.005 (.127 mm)									
Length Tolerance	±2% of sheath length									
Camber Tolerance	.015" (0.38 mm) per foot of length									

### ELECTRICAL SPECIFICATIONS

Diameter (in)	.438	.496	.553	.580	.621	.660	.710	.745	.813	.993
Maximum Voltage	240	240	240	240	240	480	480	480	480	480
Maximum Amperage	6.7	10.5	10.5	23	25	25	25	25	25	25



### Standard Sizes and Ratings

Part Numbers shown are for heaters with 10" long, 428°F (250°C) stranded flexible lead wires inside the conduit box.

Heater Diameter in (mm)	Inserted Length		Heated Length		Watts	Watt Density		Part Number 240V
	in	mm	in	mm		W/in <sup>2</sup>	W/cm <sup>2</sup>	
<b>.438 (11.1)</b>	18	457	12	305	1000	60.6	9.4	HDB00001
	24	610	18	457	1500	60.6	9.4	HDB00002
<b>.496 (12.6)</b>	18	457	12	305	1900	101.6	15.8	HDB00003
	24	610	18	457	2300	82.0	12.7	HDB00004
	30	762	24	610	2300	61.5	9.5	HDB00005
	36	914	30	762	2300	49.2	7.6	HDB00006
<b>.553 (14.0)</b>	18	457	12	305	1200	57.6	8.9	HDB00007
	24	610	18	457	1700	54.4	8.4	HDB00008
	30	762	24	610	2500	60.0	9.3	HDB00009
	36	914	30	762	3200	61.4	9.5	HDB00010
<b>.580 (14.7)</b>	18	457	12	305	2200	100.6	15.6	HDB00011
	24	610	18	457	3300	100.6	15.6	HDB00012
	30	762	24	610	4350	99.5	15.4	HDB00013
	36	914	30	762	5450	99.7	15.5	HDB00014
<b>.621 (15.8)</b>	18	457	12	305	2350	100.4	15.6	HDB00015
	24	610	18	457	3500	99.7	15.4	HDB00016
	30	762	24	610	4700	100.4	15.6	HDB00017
	36	914	30	762	5500	94.0	14.6	HDB00018
<b>.660 (16.8)</b>	18	457	12	305	1200	48.2	7.5	HDB00019
	24	610	18	457	1700	45.5	7.1	HDB00020
	30	762	24	610	2300	46.2	7.2	HDB00021
	36	914	30	762	2800	45.0	7.0	HDB00022
<b>.710 (18.0)</b>	18	457	12	305	2700	100.9	15.6	HDB00023
	24	610	18	457	4000	99.7	15.4	HDB00024
	30	762	24	610	5350	100.0	15.5	HDB00025
	36	914	30	762	5500	82.2	12.7	HDB00026
<b>.745 (18.9)</b>	18	457	12	305	2800	99.7	14.0	HDB00027
	24	610	18	457	4200	99.7	15.5	HDB00028
	30	762	24	610	5500	97.9	15.2	HDB00029
	36	914	30	762	5500	78.3	12.1	HDB00030
<b>.813 (20.7)</b>	18	457	12	305	1800	58.7	9.1	HDB00031
	24	610	18	457	2500	54.4	8.4	HDB00032
	30	762	24	610	3500	57.1	8.6	HDB00033
	36	914	30	762	4200	54.8	8.5	HDB00034
<b>.993 (25.2)</b>	18	457	12	305	3750	100.2	15.5	HDB00035
	24	610	18	457	5500	97.9	15.2	HDB00036
	30	762	24	610	5500	73.5	11.4	HDB00037
	36	914	30	762	5500	58.8	9.1	HDB00038

### How to Order

#### Catalog Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List.

Note that Part Numbers shown are for heaters with 10" long, 428°F (250°C) stranded flexible lead wires inside the conduit box.

**Standard lead time is 3 weeks.**

#### Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Bolt Heater to meet your requirements. **Standard lead time is 3 weeks.**


**Please Specify** the following:

- Diameter
- Insertion Length
- Cold Section (top and bottom)
- Wattage
- Voltage
- Lead Length or Post Terminals
- Optional Cord or Plug
- Special Features



## Hi-Density Pennybottom<sup>®</sup> Cartridge Heaters

**Designed for Trouble Free Performance and Improved Efficiency**

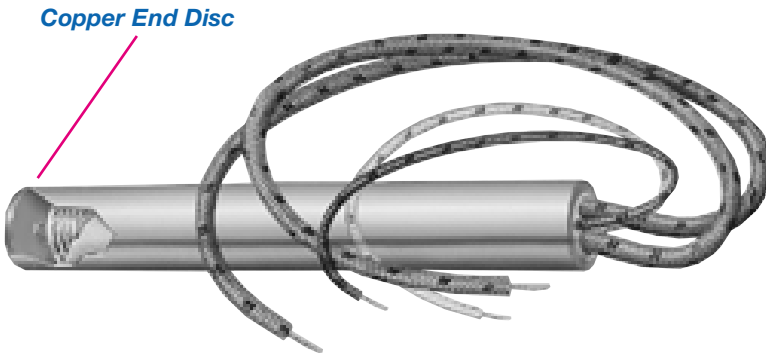




### Features:

- \* **Pennybottom<sup>™</sup>** Copper Flat End Disc
- \* Hi-Density Swaged Construction
- \* Grounded Type J Thermocouple at the Copper End Disc
- \* 36" High Temperature Leads for both Heater and Thermocouple
- \* Minimum Cold Sections
- \* Computer Designed Distributed Wattage
- \* Maximum Temperature at Lead End— 482°F (250°C)
- \* OEM Replacements Available From Stock for Runnerless Molding Systems

### Injection Molding Applications Include:

- Hot Tip Bushings
- Gating Torpedoes
- Manifold Bushings

These drawings show typical installations of a Hi-Density Pennybottom<sup>™</sup> Cartridge Heater:

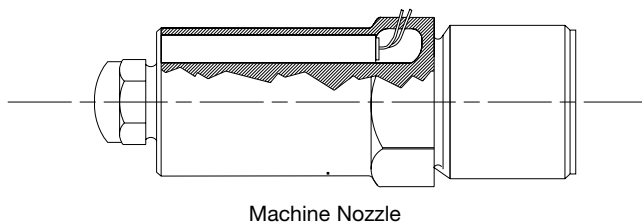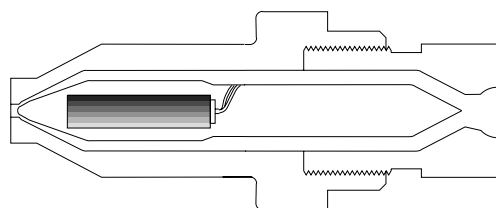

Tempco's dedication to quality and striving for product improvement has led to the development of the Pennybottom<sup>™</sup> cartridge heater for plastic injection runnerless molding: hot tip bushings, pinpoint gating torpedoes/probes, and manifold bushings.

The unique feature of the Pennybottom<sup>™</sup> cartridge heater is the use of a flat copper end disc to maximize heat transfer to the gate area of probes and bushings and improved temperature sensing. It has been proved through extensive field testing that heat at the tip can be increased by up to 30°F. The Pennybottom<sup>™</sup> cartridge heater also includes a type J thermocouple at the end disc. The junction is grounded to the flat copper end disc, providing excellent temperature control at the gating area, eliminating freeze-ups or drool, and thus producing quality molded parts.

Additional features of Pennybottom<sup>™</sup> heaters include minimum cold sections and computer designed distributed wattage. Pennybottom<sup>™</sup> heaters are manufactured under the same design specifications and rigid quality control workmanship as the Hi-Density cartridge heater line. The swaging operation during the manufacturing process produces a rugged and durable cartridge heater for greater reliability and exceptionally long operating heater life.



The cartridge heaters listed in this section include Pennybottom<sup>™</sup> and Hi-Density cartridge heaters configured for specific tasks in the plastic injection molding environment with extra long leads, Teflon<sup>®</sup> or fiberglass insulation, with and without thermocouples, grounded at the end disc or in the middle of the heater.

### PENNYBOTTOM<sup>™</sup> HEATER SPECIFICATIONS

Nominal Diameter	1/4"		3/8"		1/2"	
	in	(mm)	in	(mm)	in	(mm)
Actual Diameter	.248	(6.30)	.371	(9.42)	.496	(12.60)
Diameter Tolerance	±.002	(.051)	±.002	(.051)	±.002	(.051)
Minimum Length	1	(25.40)	1	(25.40)	1	(25.40)
Maximum Length	36	(914)	48	(1219)	60	(1524)
Length Tolerance	± <sup>3</sup> / <sub>32</sub> (2.4)		± <sup>3</sup> / <sub>32</sub> (2.4)		± <sup>3</sup> / <sub>32</sub> (2.4)	
Length Tolerance	±2% of Sheath Length					
Camber Tolerance	.010" (.254 mm) per Foot of Length					
Camber Tolerance	.020" (.508 mm) per Foot of Length					



### Standard Sizes and Ratings

Cartridge Heater Diameter	Sheath Length		Watts	Watt Density		Part Number	
	in	mm		W/in <sup>2</sup>	W/cm <sup>2</sup>	120V	240V
1/4" Actual .248	1½	38.1	200	255	39	—	HDP00001
	1¾	44.5	200	204	32	HDP00002	—
	2	50.8	200	170	26	HDP00003	HDP00004
	2½	63.5	200	127	20	HDP00005	HDP00006
	3	76.2	200	102	16	HDP00007	HDP00008
	3½	88.9	250	106	16	—	HDP00009
	4	101.6	250	91	14	—	HDP00010
3/8" Actual .371	5	127.0	250	71	11	—	HDP00011
	1¾	44.5	200	136	21	—	HDP00012
	2	50.8	250	141	22	—	HDP00013
	2½	63.5	250	106	16	—	HDP00014
	3	76.2	260	88	14	—	HDP00015
	3½	88.9	320	91	14	—	HDP00016
	4	101.6	370	90	14	—	HDP00017
	4½	114.3	420	89	14	—	HDP00018
	5	127.0	470	89	14	—	HDP00019
	5½	139.7	525	89	14	—	HDP00020
	6	152.4	575	89	14	—	HDP00021
	6½	165.1	625	88	14	—	HDP00022
	7	177.8	675	88	14	—	HDP00023
	7½	190.5	725	88	14	—	HDP00024
	8	203.2	775	88	14	—	HDP00025
9	228.6	885	88	14	—	HDP00026	
9½	241.3	940	89	14	—	HDP00027	
10	254.0	990	88	14	—	HDP00028	
10½	266.7	1045	89	14	—	HDP00029	
11½	292.1	1500	116	18	—	HDP00030	
1/2" Actual .496	2½	63.5	280	89	14	—	HDP00031
	3½	88.9	420	89	14	—	HDP00032
	4	101.6	490	89	14	—	HDP00033
	4½	114.3	550	88	14	—	HDP00034
	5	127.0	625	88	14	—	HDP00035
	5½	139.7	700	89	14	—	HDP00036
	6	152.4	775	90	14	—	HDP00037
	6½	165.1	850	90	14	—	HDP00038
	7	177.8	900	88	14	—	HDP00039
	7½	190.5	975	89	14	—	HDP00040
	8	203.2	1050	89	14	—	HDP00041
	8½	215.9	1100	88	14	—	HDP00042
	9	228.6	1200	90	14	—	HDP00043
	9½	241.3	1250	88	14	—	HDP00044
	10	254.0	1325	89	14	—	HDP00045
	10½	266.7	1400	89	14	—	HDP00046
	11	279.4	1470	89	14	—	HDP00047
12½	317.5	1675	89	14	—	HDP00048	
13½	342.9	1800	88	14	—	HDP00049	

For Stock  
OEM Replacement  
Runnerless Molding  
Cartridge Heaters—  
See pages 2-54  
through 2-61.



### How to Order

#### Stock Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List above. Note that Part Numbers shown are for heaters with 36" Heater and T/C Leads. Thermocouple Type J grounded.

#### Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Pennybottom™ Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

**Please Specify** the following:

- Diameter
- Length
- Wattage
- Voltage
- Lead Length
- Special Features



**OEM Replacement Hi-Density Cartridge Heaters for Plastic Processing**

**Pages 2-54 through 2-61**

**ALL ITEMS IN STOCK!**



**STOCK ITEMS  
ORDER NOW!**

**OEM Replacement Cartridge Heaters  
For Runnerless Molding Hot Tip Bushing**

**Thermocouple Heaters – 240V**

**Features:**

- \* **Pennybottom™** Copper Flat End Disc
- \* Hi-Density Swaged Construction
- \* Grounded Type J Thermocouple at the Copper End Disc
- \* 36" High Temperature Leads Thermocouple and Heater
- \* Computer Designed Distributed Wattage
- \* Designed for 240VAC
- \* Available From Stock

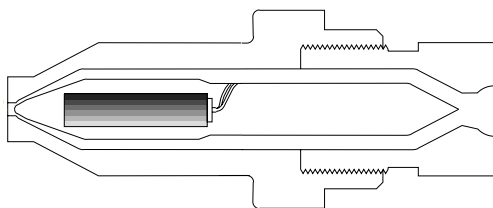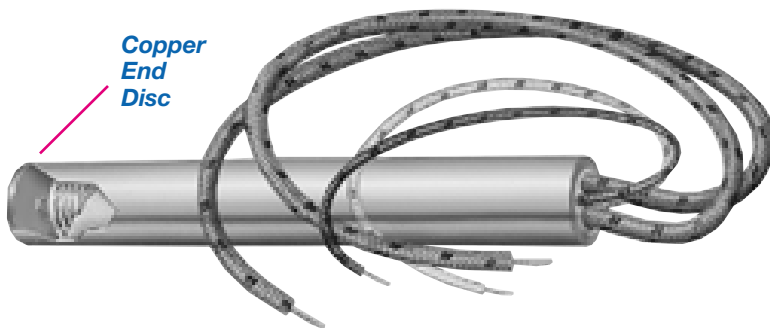

Cartridge Heater Diameter	Sheath Length	Watts	Part Number	
			OEM	TEMPCO
3/8" Actual .371	1 3/4	200	TJ38017	HDP00012
	2	250	TJ38020	HDP00013
	2 1/2	250	TJ38025	HDP00014
	3	260	TJ38030	HDP00015
	3 1/2	320	TJ38035	HDP00016
	4	370	TJ38040	HDP00017
	4 1/2	420	TJ38045	HDP00018
	5	470	TJ38050	HDP00019
	5 1/2	525	TJ38055	HDP00020
	6	575	TJ38060	HDP00021
	6 1/2	625	TJ38065	HDP00022
	7	675	TJ38070	HDP00023
	7 1/2	725	TJ38075	HDP00024
	8	775	TJ38080	HDP00025
	9	885	TJ38090	HDP00026
	9 1/2	940	TJ38095	HDP00027
1/2" Actual .496	10	990	TJ38100	HDP00028
	10 1/2	1045	TJ38105	HDP00029
	11 1/2	1500	TJ38115	HDP00030
	2 1/2	280	TJ12025	HDP00031
	3 1/2	420	TJ12035	HDP00032
	4	490	TJ12040	HDP00033
	4 1/2	550	TJ12045	HDP00034
	5	625	TJ12050	HDP00035
	5 1/2	700	TJ12055	HDP00036
	6	775	TJ12060	HDP00037
	6 1/2	850	TJ12065	HDP00038
	7	900	TJ12070	HDP00039
	7 1/2	975	TJ12075	HDP00040
	8	1050	TJ12080	HDP00041
	8 1/2	1100	TJ12085	HDP00042
	9	1200	TJ12090	HDP00043
	9 1/2	1250	TJ12095	HDP00044
	10	1325	TJ12100	HDP00045
10 1/2	1400	TJ12105	HDP00046	
11	1470	TJ12110	HDP00047	
12 1/2	1675	TJ12125	HDP00048	
13 1/2	1800	TJ12135	HDP00049	





**STOCK ITEMS  
ORDER NOW!**

### OEM Replacement Cartridge Heaters For Runnerless Molding Hot Tip Bushings

Non-Thermocouple Type "F" Heaters – 240V

**Features:**

- \* **Pennybottom™** Copper Flat End Disc
- \* Hi-Density Swaged Construction
- \* 36" High Temperature Heater Flexible leads
- \* Computer Designed Distributed Wattage
- \* Designed for 240VAC

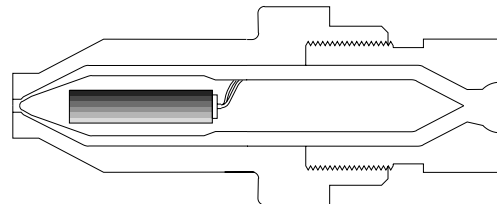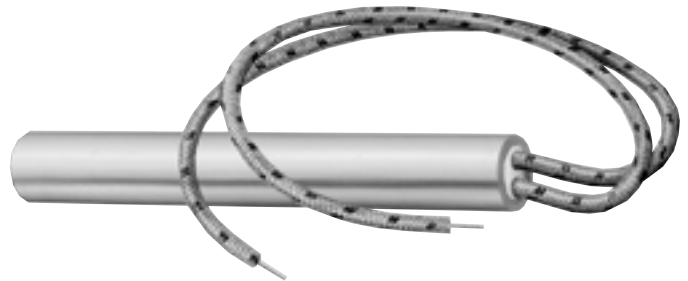

Cartridge Heater Diameter	Sheath Length	Watts	Part Number	
			OEM	TEMPCO
3/8" Actual .371	1 1/4	200	H-38017	HDP00050
	2 1/2	250	H-38025	HDP00051
	3	260	H-38030	HDP00052
	4	370	H-38040	HDP00053
	4 1/2	420	H-38045	HDP00054
	5	470	H-38050	HDP00055
	5 1/2	525	H-38055	HDP00056
	6	575	H-38060	HDP00057
	6 1/2	625	H-38065	HDP00058
	7	675	H-38070	HDP00059
	7 1/2	725	H-38075	HDP00060
	8	775	H-38080	HDP00061
	8 1/2	835	H-38085	HDP00062
	9	885	H-38090	HDP00063
	9 1/2	940	H-38095	HDP00064
	10	990	H-38100	HDP00065
1/2" Actual .496	10 1/2	1045	H-38105	HDP00066
	11 1/2	1150	H-38115	HDP00067
	13	1300	H-38130	HDP00068
	13 1/2	1350	H-38135	HDP00069
	3 1/2	420	H-12035	HDP00070
	4	490	H-12040	HDP00071
	4 1/2	550	H-12045	HDP00072
	5	625	H-12050	HDP00073
	5 1/2	700	H-12055	HDP00074
	6	775	H-12060	HDP00075
	6 1/2	850	H-12065	HDP00076
	7	900	H-12070	HDP00077
	7 1/2	975	H-12075	HDP00078
	8	1050	H-12080	HDP00079
	8 1/2	1100	H-12085	HDP00080
	9	1200	H-12090	HDP00081
	9 1/2	1250	H-12095	HDP00082
	10	1325	H-12100	HDP00083
	10 1/2	1400	H-12105	HDP00084
	11	1470	H-12110	HDP00085
11 1/2	1525	H-12115	HDP00086	
12 1/2	1675	H-12125	HDP00087	
13 1/2	1800	H-12135	HDP00088	
14 1/2	1950	H-12145	HDP00089	
15 1/2	2100	H-12155	HDP00090	
16 1/2	2200	H-12165	HDP00091	
17 1/2	2300	H-12175	HDP00092	
18 1/2	2500	H-12185	HDP00093	
19 1/2	2875	H-12195	HDP00094	

**SAME DAY SHIPMENT**  
on stock items **2** PM  
ORDERED BY **2** CST

## OEM REPLACEMENTS




**STOCK ITEMS**  
**ORDER NOW!**


**OEM Replacement Cartridge Heaters  
For Runnerless Molding Systems**

**Features:**

- \* **Pennybottom™** Copper Flat End Disc
- \* Hi-Density Swaged Construction
- \* Grounded Type J Thermocouple at the Copper End Disc
- \* 36" High Temperature Leads for both Heater and Thermocouple
- \* Computer Designed Distributed Wattage
- \* Designed for 240VAC
- \* Available From Stock

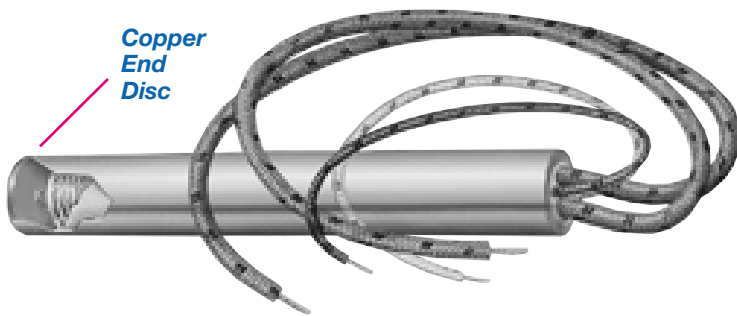

Cartridge Heater Diameter	Sheath Length	Watts	Part Number	
			OEM	TEMPCO
<b>3/8"</b> Actual .371	1¼	200	TCH0001	HDP00012
	2	250	TCH0002	HDP00013
	2½	250	TCH0003	HDP00014
	3	260	TCH0004	HDP00015
	3½	320	TCH0005	HDP00016
	4	370	TCH0006	HDP00017
	4½	420	TCH0007	HDP00018
	5	470	TCH0008	HDP00019
	5½	525	TCH0009	HDP00020
	6	575	TCH0010	HDP00021
	6½	625	TCH0011	HDP00022
	7	675	TCH0012	HDP00023
	7½	725	TCH0013	HDP00024
	8	775	TCH0014	HDP00025
<b>1/2"</b> Actual .496	3½	420	TCH0015	HDP00032
	4	490	TCH0016	HDP00033
	4½	550	TCH0017	HDP00034
	5	625	TCH0018	HDP00035
	5½	700	TCH0019	HDP00036
	6	775	TCH0020	HDP00037
	6½	850	TCH0021	HDP00038
	7½	975	TCH0022	HDP00040

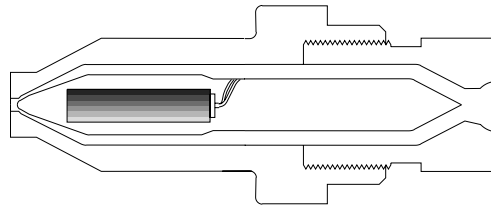

**OEM REPLACEMENTS**






### OEM Replacement Cartridge Heaters For Runnerless Molding Probes

#### Features:

- \* **Pennybottom™** Copper Flat End Disc
- \* Hi-Density Swaged In Teflon® end seal Construction
- \* Grounded Type J Thermocouple at the Copper End Disc
- \* 48" Teflon® Insulated Thermocouple and Heater Leads Internally Connected
- \* Minimum Cold Sections
- \* Computer Designed Distributed Wattage
- \* Designed for 240VAC



**STOCK ITEMS**  
**ORDER NOW!**

#### Thermocouple (TC) Probe Heaters – 240V

Cartridge Heater Diameter	Sheath Length	Watts	Part Number		
			OEM Probe	OEM Heater	TEMPCO
1/4" Actual .248	2	200	AFP-300	AFTC-202-2	HDP00095
	3	300	AFP-400	AFTC-203-2	HDP00096
	4	375	AFP-500	AFTC-204-2	HDP00097
	5	475	AFP-600	AFTC-205-2	HDP00098
	3	150	AFP(N)-310	AFTC-213-2	HDP00099
	3.75	220	AFP(N)-410	AFTC-214-2	HDP00100
	4.75	275	AFP(N)-510	AFTC-215-2	HDP00101
	5.75	350	AFP(N)-610	AFTC-216-2	HDP00102
3/8" Actual .371	7.15	645	AFPN-720	AFTC-327-2	HDP00103
	8.15	760	AFPN-820	AFTC-328-2	HDP00104
	9.15	870	AFPN-920	AFTC-329-2	HDP00105
	10.15	980	AFPN-1020	AFTC-3210-2	HDP00106

#### Non-Thermocouple (TC) Probe Heaters – 240V

**STOCK ITEMS**  
**ORDER NOW!**

Cartridge Heater Diameter	Sheath Length	Watts	Part Number		
			OEM Probe	OEM Heater	TEMPCO
1/4" Actual .248	2	200	AFP-300	AFC-202-2	HDP00107
	3	300	AFP-400	AFC-203-2	HDP00108
	4	375	AFP-500	AFC-204-2	HDP00109
	5	475	AFP-600	AFC-205-2	HDP00110
	3	150	AFP(N)-310	AFC-213-2	HDP00111
	3.75	220	AFP(N)-410	AFC-214-2	HDP00112
	4.75	275	AFP(N)-510	AFC-215-2	HDP00113
	5.75	350	AFP(N)-610	AFC-216-2	HDP00114

**SAME DAY SHIPMENT**  
on stock items  
**ORDERED BY 2 PM CST**



## OEM Replacement Hi-Density Cartridge Heaters For Distributor Tubes

**Hi-Density Cartridge Heaters for Distributor Tubes** are designed specifically for the application. The type J thermocouple is located in the center of the heater to accurately sense the flow temperature and maintain a uniform heat profile.



The leads have high temperature insulation to withstand internal mold temperatures and potential abrasion and are 36" long to run to the power connectors without requiring splices.

withstand internal mold temperatures and potential abrasion and are 36" long to run to the power connectors without requiring splices.

### Features:

- \* Hi-Density Swaged Construction
- \* Grounded Type J Thermocouple at the Center
- \* 36" Leads for both Heater and Thermocouple
- \* Designed for 240VAC

Designed for 240VAC



Cartridge Heater Diameter	Sheath Length in	Watts	Part Number	
			OEM	TEMPCO
3/8" Actual .371	5	320	HCTC-03-4	HDC02548
	5½	340	HCTC-03-45	HDC02549
	6	400	HCTC-03-5	HDC02550
	6½	430	HCTC-03-55	HDC02551
	7	450	HCTC-03-6	HDC02552
	7½	470	HCTC-03-65	HDC02553
	8	480	HCTC-03-7	HDC02554
	8½	515	HCTC-03-75	HDC02555
	9	550	HCTC-03-8	HDC02556
	10	650	HCTC-03-9	HDC02557
	11	710	HCTC-03-10	HDC02558
	12	720	HCTC-03-11	HDC02559
	13	760	HCTC-03-12	HDC02560
	14	810	HCTC-03-13	HDC02561
1/2" Actual .496	4	380	HCTC-04-4	HDC02562
	5	500	HCTC-04-5	HDC02563
	6	600	HCTC-04-6	HDC02564
	7	700	HCTC-04-7	HDC02565
	8	820	HCTC-04-8	HDC02566
	9	920	HCTC-04-9	HDC02567
	10	1030	HCTC-04-10	HDC02568
	11	1140	HCTC-04-11	HDC02569
	12	1250	HCTC-04-12	HDC02570
	13	1350	HCTC-04-13	HDC02571
	14	1460	HCTC-04-14	HDC02572
	15	1570	HCTC-04-15	HDC02573
	16	1680	HCTC-04-16	HDC02574
	17	1780	HCTC-04-17	HDC02575
	18	1900	HCTC-04-18	HDC02576
	19	2010	HCTC-04-19	HDC02577
	20	2110	HCTC-04-20	HDC02578
	21	2220	HCTC-04-21	HDC02579
	22	2330	HCTC-04-22	HDC02580
	23	2400	HCTC-04-23	HDC02581
24	2400	HCTC-04-24	HDC02582	
25	2400	HCTC-04-25	HDC02583	
26	2400	HCTC-04-26	HDC02584	
27	2400	HCTC-04-27	HDC02585	
28	2400	HCTC-04-28	HDC02586	
29	2400	HCTC-04-29	HDC02587	
30	2400	HCTC-04-30	HDC02588	

Designed for 240VAC



Cartridge Heater Diameter	Sheath Length in	Watts	Part Number	
			OEM	TEMPCO
5/8" Actual .621	5	620	HCTC-05-5	HDC02589
	6	750	HCTC-05-6	HDC02590
	7	880	HCTC-05-7	HDC02591
	8	1020	HCTC-05-8	HDC02592
	9	1160	HCTC-05-9	HDC02593
	10	1300	HCTC-05-10	HDC02594
	11	1430	HCTC-05-11	HDC02595
	12	1570	HCTC-05-12	HDC02596
	13	1700	HCTC-05-13	HDC02597
	14	1840	HCTC-05-14	HDC02598
	15	1980	HCTC-05-15	HDC02599
	16	2110	HCTC-05-16	HDC02600
	17	2250	HCTC-05-17	HDC02601
	18	2390	HCTC-05-18	HDC02602
	19	2520	HCTC-05-19	HDC02603
	20	2660	HCTC-05-20	HDC02604
	21	2800	HCTC-05-21	HDC02605
	22	2930	HCTC-05-22	HDC02606
	23	3070	HCTC-05-23	HDC02607
	24	3200	HCTC-05-24	HDC02608
	25	3340	HCTC-05-25	HDC02609
	26	3480	HCTC-05-26	HDC02610
	27	3620	HCTC-05-27	HDC02611
	28	3750	HCTC-05-28	HDC02612
	29	3900	HCTC-05-29	HDC02613
	30	4020	HCTC-05-30	HDC02614
	31	4160	HCTC-05-31	HDC02615
	32	4300	HCTC-05-32	HDC02616
	33	4430	HCTC-05-33	HDC02617
	34	4570	HCTC-05-34	HDC02618
	35	4710	HCTC-05-35	HDC02619
	36	4840	HCTC-05-36	HDC02620
37	4980	HCTC-05-37	HDC02621	
38	5120	HCTC-05-38	HDC02622	
39	5250	HCTC-05-39	HDC02623	
40	5390	HCTC-05-40	HDC02624	
41	5520	HCTC-05-41	HDC02625	
42	5520	HCTC-05-42	HDC02626	
43	5520	HCTC-05-43	HDC02627	
44	5520	HCTC-05-44	HDC02628	





### OEM Replacement Cartridge Heaters

**STOCK ITEMS**  
**ORDER NOW!**

Designed for 240VAC




### Externally Heated Manifolds

#### Features:

- \* Hi-Density Swaged Construction
- \* 36" High Temperature leads with 6" stainless steel braid
- \* Computer Designed Distributed Wattage
- \* Designed for 240VAC
- \* Available From Stock

Cartridge Heater Diameter	Sheath Length in	Watts	Part Number	
			OEM	TEMPCO
1/2" Actual .496	4	500	ECH0103	HDC02629
	4½	575	ECH0104	HDC02630
	5	650	ECH0105	HDC02631
	5½	725	ECH0106	HDC02632
	6	800	ECH0107	HDC02633
	6½	875	ECH0108	HDC02634
	7	950	ECH0109	HDC02635
	7½	1025	ECH0110	HDC02636
	8	1100	ECH0111	HDC02637
	8½	1175	ECH0112	HDC02638
	9	1200	ECH0113	HDC02639
	10	1350	ECH0114	HDC02640
	11	1500	ECH0115	HDC02641
	12	1650	ECH0116	HDC02642
	15	2050	ECH0117	HDC02643
	18	2500	ECH0118	HDC02644

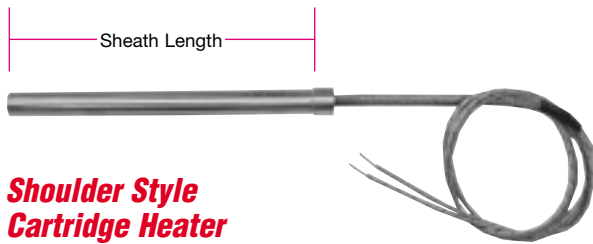

### Shoulder Style Cartridge Heater

#### Features:

- \* Hi-Density Swaged Construction
- \* 36" High Temperature leads with 6" braid
- \* Computer Designed Distributed Wattage
- \* Designed for 240VAC
- \* Available From Stock


Designed for 240VAC

**STOCK ITEMS**  
**ORDER NOW!**

Cartridge Heater Diameter	Sheath Length in	Watts	Part Number	
			OEM	TEMPCO
1/2" Actual .496	4	500	CHS0119	HDC02645
	4½	575	CHS0120	HDC02646
	5	650	CHS0121	HDC02647
	5½	725	CHS0122	HDC02648
	6	800	CHS0123	HDC02649
	6½	875	CHS0124	HDC02650
	7	950	CHS0125	HDC02651
	7½	1025	CHS0126	HDC02652
	8	1100	CHS0127	HDC02653
	8½	1175	CHS0128	HDC02654
	9	1200	CHS0129	HDC02655
	10	1350	CHS0130	HDC02656
	11	1500	CHS0131	HDC02657
	12	1650	CHS0132	HDC02658
	15	2050	CHS0133	HDC02659
	18	2500	CHS0134	HDC02660

## OEM REPLACEMENTS

SEE PAGE 10-14  
**For Tubular Hot Runner Mold Heaters**  
IN THE TUBULAR HEATER SECTION.

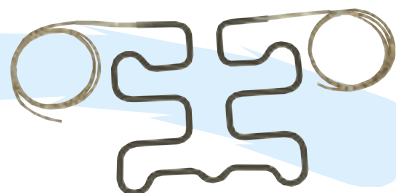



## OEM Replacement Hi-Density Cartridge Heaters For Plastic Molding Internally Heated Machine Nozzles

Hi-Density cartridge heaters for **Internally Heated Plastic Injection Machine Nozzles** are designed specifically for the application. The leads are Teflon® insulated, internally swaged, with a Teflon® end seal to provide moisture protection.



### Features:

- \* Hi-Density Swaged Construction
- \* ¼" diameter
- \* Swaged in Teflon® End Seal
- \* 10" Internally Connected Teflon® Insulated Lead Wires
- \* Nickerson Machinery and IMS Company Replacements
- \* Available From Stock

### Heaters for Nickerson Internally Heated Nozzles



Sheath Length (in)	Watts	Voltage	Part Number	
			Nickerson	TEMPCO
1	100	120	ICH101	HDC02514
1	100	240	ICH102	HDC02515
1½	125	120	ICH151	HDC02516
1½	125	240	ICH152	HDC02517
2	150	120	ICH201	HDC02518
2	150	240	ICH202	HDC02519
3	200	120	ICH301	HDC02520
3	200	240	ICH302	HDC02521
4	250	120	ICH401	HDC02522
4	250	240	ICH402	HDC02523
5	300	120	ICH501	HDC02524
5	300	240	ICH502	HDC02525
6	400	120	ICH601	HDC02526
6	400	240	ICH602	HDC02527
7	500	120	ICH701	HDC02528
7	500	240	ICH702	HDC02529
8	600	120	ICH801	HDC02530
8	600	240	ICH802	HDC02531

### Heaters for IMS Company Internally Heated Nozzles



Sheath Length (in)	Watts	Voltage	Part Number	
			IMS Company	TEMPCO
1	125	120	CHN1-250-0100-1-0125	HDC02532
1	125	240	CHN1-250-0100-2-0125	HDC02533
1½	150	120	CHN1-250-0150-1-0150	HDC02534
1½	150	240	CHN1-250-0150-2-0150	HDC02535
2	175	120	CHN1-250-0200-1-0175	HDC02536
2	175	240	CHN1-250-0200-2-0175	HDC02537
2½	175	120	CHN1-250-0250-1-0175	HDC02538
2½	175	240	CHN1-250-0250-2-0175	HDC02539
3	200	120	CHN1-250-0300-1-0200	HDC02520
3	200	240	CHN1-250-0300-2-0200	HDC02521
4	300	120	CHN1-250-0400-1-0300	HDC02540
4	300	240	CHN1-250-0400-2-0300	HDC02541
4½	325	120	CHN1-250-0450-1-0325	HDC02542
4½	325	240	CHN1-250-0450-2-0325	HDC02543
5	300	120	CHN1-250-0500-1-0300	HDC02524
5	300	240	CHN1-250-0500-2-0300	HDC02525
6	400	120	CHN1-250-0600-1-0400	HDC02526
6	400	240	CHN1-250-0600-2-0400	HDC02527
6½	500	120	CHN1-250-0650-1-0500	HDC02544
6½	500	240	CHN1-250-0650-2-0500	HDC02545
7	600	240	CHN1-250-0700-2-0600	HDC02546
8	600	120	CHN1-250-0800-1-0600	HDC02530
8	600	240	CHN1-250-0800-2-0600	HDC02531
9	700	240	CHN1-250-0900-2-0700	HDC02547

SAME DAY SHIPMENT  
on stock items **2** PM  
ORDERED BY **2** CST



### OEM Replacement Hi-Density Cartridge Heaters

### Underwater Pellatizer Die Heater


#### Features:

- \* Hi-Density Swaged Construction
- \* 44" mica insulated 842°F (450°C) Lead Wires
- \* 1" and 1/2" Diameter Heater Sheath
- \* 16 Gauge Stainless Steel Mounting Flange
- \* Designed for 240VAC




**STOCK ITEM**  
**ORDER NOW!**


**STOCK ITEM**  
**ORDER NOW!**

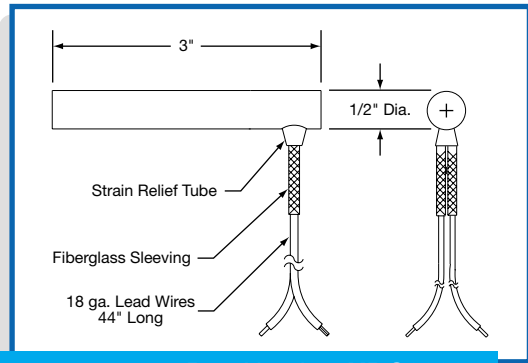

300W, 240V — Part Number **HDC02684**

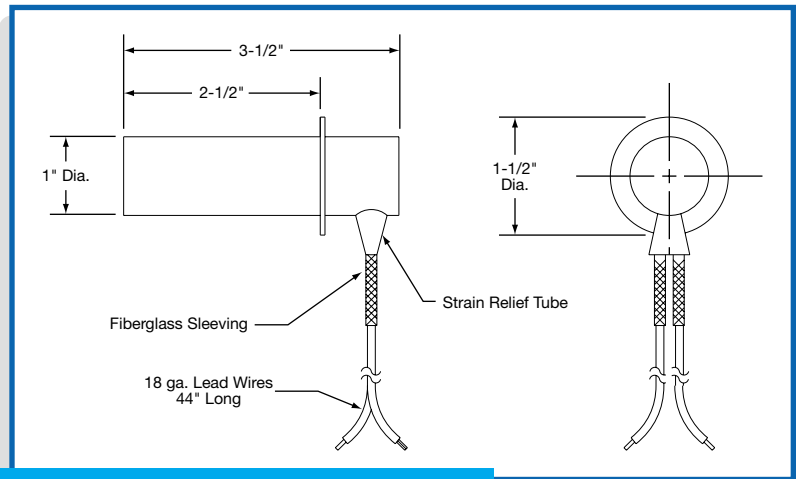

600W, 240V — Part Number **HDC02661**

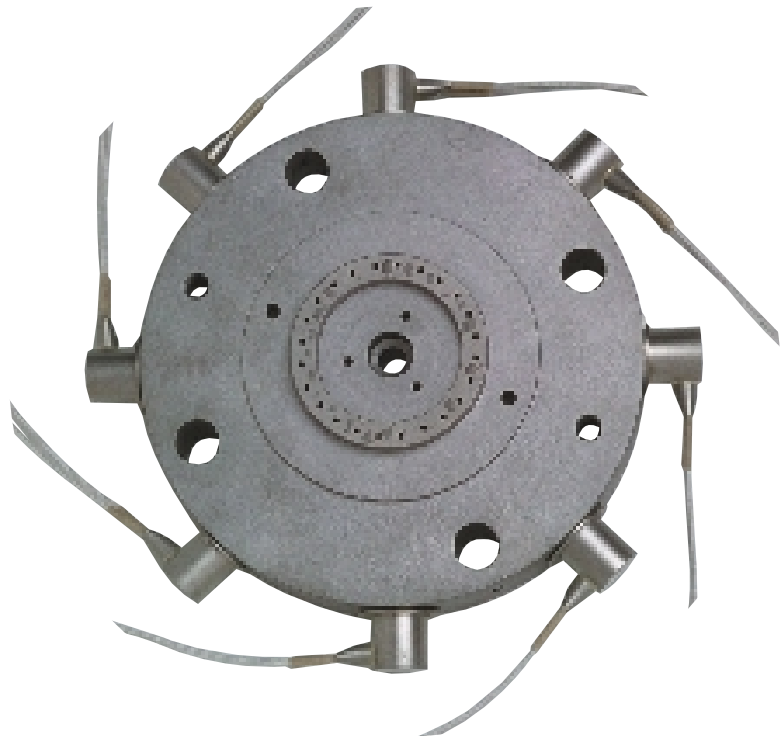

**SAME DAY SHIPMENT**  
**on stock items** **2 PM**  
**ORDERED BY** **CST**

## OEM REPLACEMENTS




**TEMPCO Square Cartridge Heaters** allow more contact per linear inch than cylindrical cartridge heaters, for greater heat transfer to the surrounding medium. Inserted in a milled slot they permit greater heater lengths than would be possible with a drilled hole.

# SQUARE CARTRIDGE HEATERS

## TYPICAL APPLICATIONS

- Bag Sealing
- Plastic Forming Bars
- Heating of Long Platens
- Cutting Jaws

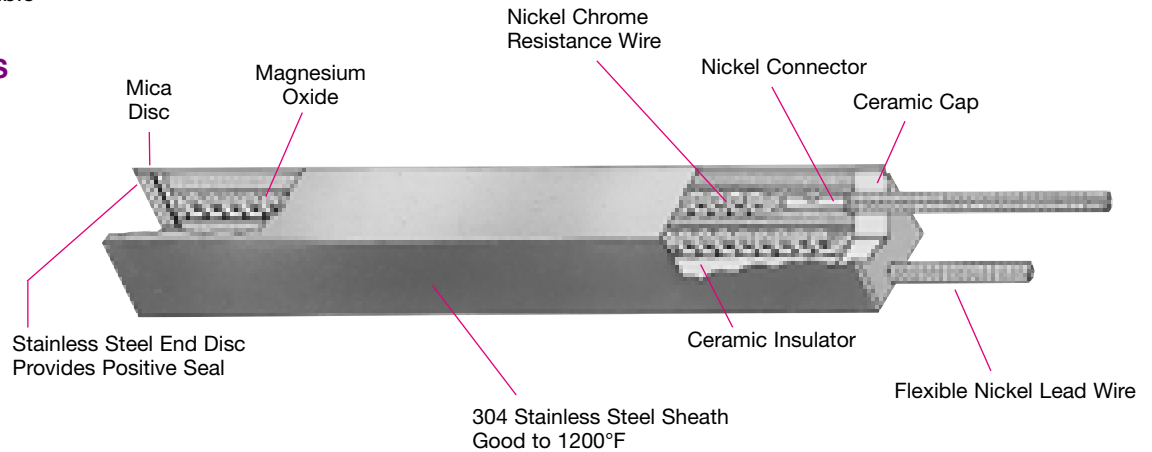

## DIMENSIONAL SPECIFICATIONS



Nominal Size (in)	3/16	1/4	3/8	1/2	5/8
Actual Size (in)	.185	.246	.370	.496	.621
Actual Size (mm)	(4.70)	(6.25)	(9.40)	(12.60)	(15.77)
Size Tolerance	±.002 (.051 mm)				
Length Tolerance	±2% with a minimum of ±1/16" (1.59 mm)				
Camber Tolerance	.010" (0.254 mm) per foot of length				

## ELECTRICAL SPECIFICATIONS

Nominal Size (in)	3/16	1/4	3/8	1/2	5/8
Maximum Voltage	120	240	240	240	480*
Maximum Amperage	2	3.5	6	10	10
Maximum Wattage	240	840	1440	2400	4800
Wattage Tolerance	Plus 5%, Minus 10%				
Resistance Tolerance	Plus 10%, Minus 5%				



\*480V when applicable — Consult Tempco
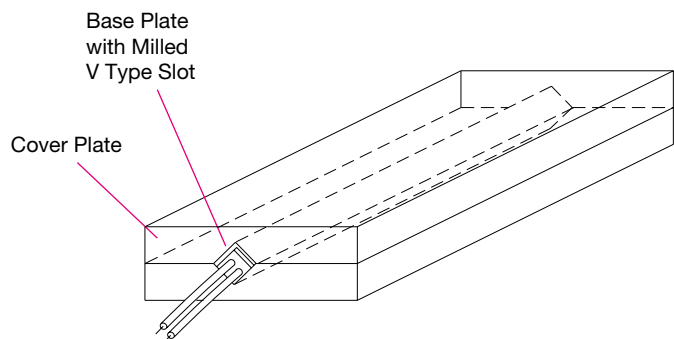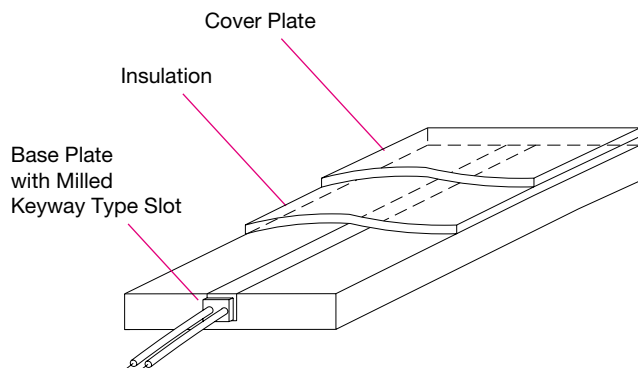
## Suggested Installation





### Terminations

 <p><b>Type F – Standard Flexible Leads</b></p> <p>Standard termination for Square Cartridge Heaters. Leads are internally connected. Sharp bending of the lead wire is possible where it exits the heater. <math>\frac{3}{16}</math>" and <math>\frac{1}{4}</math>" heaters use Teflon® insulated wires. <math>\frac{3}{8}</math>", <math>\frac{1}{2}</math>" and <math>\frac{5}{8}</math>" heaters use 482°F (250°C) rated fiberglass insulated lead wires. 10" leads are standard.</p> <p>If longer leads are required—Specify.</p>	 <p><b>Type W Straight Braided Leads</b></p> <p>Abrasive resistant while still allowing sharp bending that is not possible with armor cable. 10" of stainless steel wire braid over 12" leads is standard.</p> <p>If longer leads and braid are required—Specify.</p>	 <p><b>Type W1 Right-Angle Braided Leads</b></p> <p>Abrasive resistant while still allowing sharp bending that is not possible with armor cable. 10" of stainless steel wire braid over 12" leads is standard.</p> <p>If longer leads and braid are required—Specify.</p>
 <p><b>Type C1 Straight Armor Cable</b></p> <p>Abrasive resistant. 10" of galvanized cable over 12" leads is standard.</p> <p>If longer leads and cable are required—Specify.</p>	 <p><b>Type C3 Right-Angle Armor Cable</b></p> <p>Abrasive resistant. 10" of galvanized cable over 12" leads is standard.</p> <p>If longer leads and cable are required—Specify.</p>	 <p><b>Type R3 Angled Sheath Extension</b></p> <p>Sheath extension is potted with cement. 10" leads standard. If longer leads are required—Specify. Wire braid or armor cable can be applied for lead wire protection—Specify.</p>
 <p><b>Type S1 Straight Spring</b></p> <p>Flex resistant <math>2\frac{1}{2}</math>" long spring with 10" leads standard.</p> <p>If longer leads are required—Specify.</p>	 <p><b>Type S3 Lead Wire Strain Relief</b></p> <p>Flex resistant "T" type strain relief with 10" leads standard.</p> <p>If longer leads are required—Specify.</p>	 <p><b>Type T3 Double End Screw terminal</b></p> <p>Available on <math>\frac{1}{2}</math>" and <math>\frac{5}{8}</math>" heaters. Thread is 8-32 by <math>\frac{3}{4}</math>" long.</p>

### Additional Optional Features

#### Distributed Wattage

Special wattage concentration for even heat distribution.

#### Cold Section

Specify location and length.

#### Full length Fiberglass silicone rubber sleeving.

#### Internal Thermocouple

(N/A on  $\frac{3}{16}$ " heaters)  
Specify thermocouple type, grounded or ungrounded junction and location.

#### Consult TEMPCO...

For any additional options your application may require.



# SQUARE CARTRIDGE HEATERS

## Standard Sizes and Ratings

Size in (mm)	Sheath Length		Watts	Watt Density		Voltage	Termination Type	Part Number
	in	mm		W/in <sup>2</sup>	W/cm <sup>2</sup>			
3/16" (4.76)	2	50.8	40	36	6	120	F	SCH00001
	2 <sup>9</sup> / <sub>16</sub>	65.1	100	65	10	120	R3	SCH00002
	2 <sup>3</sup> / <sub>4</sub>	69.9	100	59	9	120	W1	SCH00003
	2 <sup>15</sup> / <sub>16</sub>	74.6	150	82	13	120	R3	SCH00004
	18	457.2	165	13	2	120	F	SCH00005
1/4" (6.35)	2	50.8	60	40	6	120	W1	SCH00006
	4 <sup>3</sup> / <sub>4</sub>	120.7	200	47	7	120	F	SCH00007
	6	152.4	200	36	6	120	F	SCH00008
	6	152.4	200	36	6	240	F	SCH00009
	8	203.2	100	14	2	120	F	SCH00010
	14	355.6	75	6	1	24	F	SCH00011
	15	381.0	200	14	2	120	F	SCH00012
	18	457.2	500	29	5	120	W1	SCH00013
	18	457.2	500	29	5	240	W1	SCH00014
	23	584.2	300	14	2	120	F	SCH00015
	26 <sup>5</sup> / <sub>8</sub>	676.3	475	19	3	240	C3	SCH00016
	35	889.0	450	13	2	120	F	SCH00017
	57 <sup>3</sup> / <sub>8</sub>	1457.3	1000	18	3	240	C3	SCH00018
	59 <sup>1</sup> / <sub>16</sub>	1503.4	1050	18	3	240	C3	SCH00019
	62 <sup>1</sup> / <sub>2</sub>	1587.5	940	15	2	240	C1	SCH00020
	67	1701.8	1000	15	2	240	C1	SCH00021
	80 <sup>1</sup> / <sub>8</sub>	2035.2	1000	13	2	240	W1	SCH00022
3/8" (9.53)	8	203.2	400	38	6	240	C3	SCH00023
	8	203.2	400	38	6	240	W	SCH00024
	9 <sup>1</sup> / <sub>4</sub>	235.0	500	40	6	120	F	SCH00025
	10	254.0	500	37	6	120	F	SCH00026
	10 <sup>1</sup> / <sub>2</sub>	266.7	300	21	3	240	F	SCH00027
	12	304.8	200	12	2	240	C3	SCH00028
	12	304.8	275	17	3	120	F	SCH00029
	12	304.8	600	36	6	120	F	SCH00030
	18 <sup>1</sup> / <sub>2</sub>	469.9	450	17	3	240	F	SCH00031
	24	609.6	1000	29	4	120	W1	SCH00032
24 <sup>3</sup> / <sub>4</sub>	628.7	65	2	.3	120	F	SCH00033	
1/2" (12.7)	8	203.2	500	36	6	240	F	SCH00034
	10	254.0	650	36	6	240	W	SCH00035
	14	355.6	1200	46	7	240	F	SCH00036
	21	533.4	1200	30	5	120	C3	SCH00037
	24	609.6	1250	27	4	240	S3	SCH00038
	24	609.6	1250	27	4	240	W	SCH00039
	24	609.6	2400	52	8	240	W	SCH00040
	29	736.6	2000	36	6	240	W	SCH00041
	33	838.2	2200	34	5	240	F	SCH00042
	35	889.0	2000	29	5	240	W	SCH00043
	39	990.6	2500	33	5	240	C3	SCH00044
46	1168.4	2500	28	4	240	W	SCH00045	
72	1828.8	2200	15	2	240	W	SCH00046	
5/8" (15.88)	6	152.4	500	36	6	240	C1	SCH00047
	20	508.0	1000	21	3	240	F	SCH00048
	33	838.2	2000	25	4	240	F	SCH00049

### How to Order

#### Catalog Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List. Note that Part Numbers shown are for heaters with 10" Standard leads or 12" leads with 10" Cable or Braid.



Square Cartridge Heaters are not a stocked item; a three-week lead time is required.

#### Custom Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Square Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

**Please Specify** the following:

- Square Size
- Length
- Wattage
- Voltage
- Termination Types
- Lead Length
- Cable/Braid Length
- Optional Features